

# MONITORING TIMES

A Publication Of  
Grove Enterprises

It's Here!

# MT

Convention  
PAGE 13

\$375

**Barging Around  
the Erie Canal**

**MT Tests the  
New Drake R8**

**DX Programs,  
CNN's Uplink Site  
and More!**

**A California Yankee  
in Cuba**



\*\*\*\*\*

0892

Q2




0 33932 00000 8



# MAXIMUM RANGE MAXIMIZED SENSITIVITY

We've Carefully balanced the amount of gain used in our input amplifiers - too much or too little results in poor performance. **OPTOELECTRONICS' HANDI-COUNTERS™** with maximized sensitivity give you the maximum range for antenna pick-up.

Made in the USA

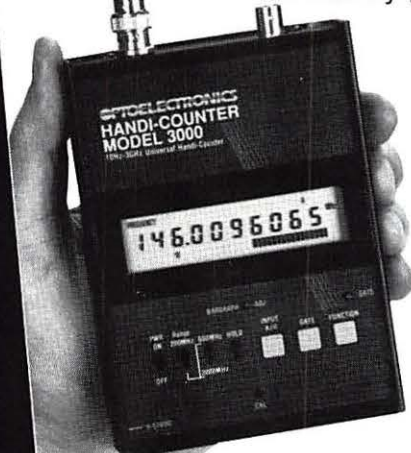

**MODEL 3000**  
Multi-function Counter  
10Hz-3GHz, 10 Digit LCD with  
frequency, period, ratio, interval  
& signal level bargraph....\$375.



**Maximum  
Security  
Device.**  
Increase your  
frequency  
finding™ by 10  
times the distance  
or more.  
**Tunable  
Preselector  
APS-104**  
\$995.

Counter Sold  
separately

**MODEL 8030**  
With all the features of the  
3000 plus enhanced input  
signal conditioning and  
enhanced TCXO time base  
\$579.



## OPTOELECTRONICS

**\$199.**



**Model 2210A**  
10Hz-2.4GHz Full range  
counter. Price includes  
Nicads & AC charger/adaptor.

### The Original Pocket-Sized LED Handi-Counter™

All of **OPTOELECTRONICS' LED  
Handi-Counters™** will:

- Count frequencies above 2.4GHz.
- Have display saving Power Switch

(avoids premature LED burn-out, leading cause of  
counter failure.)

**Accept no substitutes -  
Look for the OPTOELECTRONICS  
name on the label!**

**Only OPTOELECTRONICS  
offers you MAXIMIZED SENSITIVITY.**

Factory Direct Order Line

**1-800-327-5912**

FL(305)771-2050 • FAX(305)771-2052

5821 NE 14th Ave. • Ft. Lauderdale, FL33334 • 5% Ship/Handling (Max. \$10)  
U.S. & Canada. 15% outside continental U.S.A.  
Visa and Master Card accepted.

**\$99.**



**Model 2300 - 1MHz-2.4GHz**  
Available with NiCads and AC  
Charger Adapter. Complete  
Package only....\$128.



# MONITORING TIMES



## **Barging on the Erie Canal**

*by Everett Slosman*

6

What a way to relax—DX while drifting down a canal, enjoy the fall colors, and be treated to turn-of-the-century hospitality! Slosman provides a complete guide of broadcasting and utility transmissions from medium wave to UHF that are yours for the logging while “the Ear-eye-ee is arisin’.”

## **A California Yankee in Cuba**

*by Michael Matus*

10

The 30th anniversary of Radio Havana Cuba provided engineer-turned-journalist Matus with a good excuse to satisfy a life-long curiosity about this nearby nation. Join Michael as his week with RHC reveals the people behind the voices and the ingenuity that has kept mismatched and outdated equipment on the air for 30 years.



## **Sarasota Citizens' Patrol**

*by David Sutcliffe*

16

To be “the eyes and ears of law enforcement” is the aim of the only citizens patrol (to their knowledge) allocated real police radios. These well-trained volunteers have lowered the crime rate in their neighborhoods, and offer what appears to be a model program of cooperation between police and the community.

**COVER PHOTO:** Crowds watch the annual May Day parade, in which Radio Havana Cuba officially celebrated 30 years of broadcasting. Photo by Bill Black.



## Shortwave Listening in the Classroom

by Arthur Edwards

20

Mr. Edwards had used radio in school before, but it had never made the impact it did when he recorded the news from the VOA during Desert Storm ... in Spanish.

## Larry Van Horn: 25 years of DXing

22

On the eve of the 1992 MT Convention, we offer a preview of sage advice from Larry Van Horn, who has left no mode unsampled in his 25 years in the radio hobby.

## And More ...

In time for the fall DX season, Magne has put the Drake R8 through its grueling paces and the verdict is in. Check out page 88 for the bottom line. The JRC NRD-535 gets its report card next month, so you may want to compare to see which you want for Christmas!

In the scanner line, Bob Grove (p.90) reviews an intriguing import--the Shinwa SR001. No name recognition here, but the tests are surprisingly positive.

Tired of all the negative publicity on scanners? Bob Kay prints a letter of positive contributions you can mail to your Congressman to balance out the record (p.34).

Van Horn has advice on how to specialize in one listening field like the "experts" do (p.30). Or if you're toying with specializing in amateur radio, Uncle Skip tells you how to go about that, too (p. 42).

TVRO owners, or anyone who watches Ted Turner's networks, are treated this month to a tour of the uplink site by Ken Reitz (p.50), who describes it as a "TVRO owner's paradise."

And that's just for starters!

## DEPARTMENTS

Letters	3	Outer Limits	54
Communications	4	Below 500 kHz	56
Glossary	6	Reading RTTY	58
Shortwave Broadcasting	26	QSL Corner	59
Utility World	30	Shortwave Guide	60
The Scanning Report	34	Magne Tests...	88
What's New?	38	Scanner Equipment	90
The Beginner's Corner	42	DeMaw's Workbench	92
The Federal File	44	Experimenter's Workshop	94
High Seas	46	Antenna Topics	96
American Bandscan	48	Ask Bob	98
Satellite TV	50	Convention Calendar	101
On the Ham Bands	52	Stock Exchange	102

# MONITORING TIMES

MONITORING TIMES (ISSN: 0889-5341) is published monthly by Grove Enterprises, Inc., Brasstown, NC, USA.

Address: P. O. Box 98, 140 Dog Branch Road, Brasstown, NC 28902

Telephone: (704) 837-9200

FAX: (704) 837-2216 (24 hrs)

Subscription Rates: \$19.50 in U.S. and \$28 US Funds elsewhere; Label indicates last issue of subscription

## STAFF

### Publisher

Bob Grove, WA4PYQ

### Editor

Rachel Baughn

### Editorial Assistant

Beverly Berrong

### Subscription Services

Chanel Hilliard

### Typist

Elsa Kerschner

### Advertising

Beth Leinbach (704) 389-4007

### Dealerships

Kelly Davis

### Editorial Staff

Frequency Manager Greg Jordan

Frequency Monitors B. W. Battin

David Datko

Jack Hubby

Stephen Price

Tammy Wells

Program Manager Kannon Shanmugam

Program Monitors John Carson

Jim Frimmel

Reading RTTY Jack Albert, WA9FVP

Beginner's Corner T. J. Arey, WB2GHA

Plane Talk Jean Baker

Below 500 kHz Kevin Carey, WB2QMY

Experimenter's Wkshp Bill Cheek

DeMaw's Workbench Doug DeMaw

SW Broadcasting Glenn Hauser

High Seas James R. hay

Scanning Report Bob Kay

On the Ham Bands Ike Kerschner, N3IK

Propagation Report Magne Test...

Communications Lawrence Magne

What's New? Larry Miller

Federal File Rod Pearson

Satellite TV Ken Reitz, KC4GQA

Outer Limits John Santosuosso

Antenna Topics Antenna Topics

SW Broadcast Logs

QSL Corner Gayle Van Horn

Utility World Larry Van Horn,

N5FPW

American Bandscan Karl Zuk

Correspondence to columnists should be mailed c/o Monitoring Times. Any request for a personal reply should be accompanied by an SASE.

Second class postage paid at Brasstown, NC, and additional mailing offices.

POSTMASTER: Send address changes to Monitoring Times, Post Office Box 98, Brasstown, NC 28902.



## LETTERS

As the weather cools down and the DX season heats up, there is a sense of anticipation in the air. And what better kick-off than the MT Convention the first weekend of October? If you haven't made your reservation yet, now is the time to do it. You'll have a terrific time learning from the experts—whether behind the podium or in the audience—and the pleasure of being surrounded by people who love the radio hobby as much as you do. We hope to see you there!

Of course, you don't have to go to a convention for us to listen to you; our mailbox is always open. We especially appreciate any suggestions of topics you'd like to see us cover in further issues.

Two fellows who were prominent at least year's Convention—Al Weiner and columnist Karl Zuk—checked in with us recently with updates on the status of Radio New York International. RNI is heard via WWCR on its new frequency, 7435 kHz. Their new on-air phone number is 1-800-326-2957.

"We never take our listeners for granted," says RNI president Weiner. "They expect the unexpected from us so we try and oblige."

While Randi Steele is off the staff, as Glenn Hauser reported last month, the rest of the staff is intact; in fact, some new characters have joined the cast. Larry (the Doc) hosts a monthly program of alternative music, featuring folk and folk rock; a weekly half-hour segment focuses on the trials and tribulations of European radio pirate Radio Caroline in its pursuit of free

radio; and Julie Weiner will take a monthly look at current social and political issues.

You can hear Radio New York International (address: 14 Prospect Dr, Yonkers, NY 10705) Sunday 9pm-1am Eastern via WWCR on 7435 kHz, or via Radio for Peace International from Costa Rica, Saturdays 5:30-7:30pm, 11:30pm-1:30am Eastern on 21465, 15030 and 7375 kHz.

A long-time dream of Al Weiner came to an end this summer when the FCC denied his application for an international broadcast license. Some readers may recall Weiner had just attended an FCC hearing on the matter the day before last year's MT Convention.

When Sgt. Jack Norton was erecting this U.S. Army MARS antenna at Camp Freedom in Kuwait City, he would gladly have traded for the water-logged shoes of Mark Cavallo, no doubt. Sgt. Norton served as U.S. Army MARS director of the operation and station manager of gateway station AEM3USA in Dhahran, Saudi Arabia, and AEM3KWT in Kuwait City. With burning oil fires in the background, he is pictured erecting an HT-21 sloping vee antenna.

Worlds away, Mark Cavallo of New Jersey was vacationing in Florida. Last year we showed him monitoring New York City with his BC100 from the top of the World Trade Center. We suggested, wasn't it time for him to upgrade his receiver? "I did," he says, proud of his BC200. Here is a picture of him "in the Gulf of Mexico working diligently on breaking the Lee County Sheriff's Department 800 MHz trunk system. (I did)."

(Please turn to p. 100)

**Below:** Mark Cavallo takes his BC200 to Florida. **Right:** Sgt. Jack Norton directs MARS gateway stations during Desert Storm.



**Now In Stock...**

## 1992 Passport to World Band Radio

"The" SWL reference, **Passport** is packed with by-frequency schedules, how-to articles, features and Larry Magne's best (and worst) of equipment reviews. **\$16.95** plus \$1.70 USPS or \$3.10 UPS.

**Call Our Order Recorder**  
215 273-7823

## National Scanning Report

This month only get a sample copy of the USA's **HOT** new scanning magazine for only 25 cents. Every issue is filled with just what the scanning enthusiast wants! Stories about scanning in your town and the nation; interesting law enforcement and fire fighting news; Fed and aero activities. Tips, freqs, reader exchange, product reviews. You gotta see it.

**Use Your VISA or Mastercard**

## Ham Stuff

An exhaustive listing of who's who and what's what in radio gear, accessories, publications. SWLers and scanners will find it helpful too. **\$19.95** plus \$2.05 book rate or \$3.35 UPS.

**Back in Stock!!**

## Easy-Up Antennas

Don't spend your money on store bought antennas. Make your own! "Easy-Up" is easy to use. **\$16.95** plus \$1.70 USPS or \$2.60 UPS.

**Send for our Catalog—25 cents**

## '92 NRC AM Log

Highly respected reference from the National Radio Club. 6,000 AM radio station listings for the US and Canada. Listings consist of location, frequency, call letters, format, news network, address, slogan, transmitter powers. **\$19.95** plus \$1.70 USPS or \$3.10 UPS. 3-hole punched.

**Clearance Sale \$5 OFF**

## '91 WRTVH

Here's your chance to get it cheap! **\$14.95** gets you this superb reference covering SW, longwave, AM and TV worldwide. Plus \$1.70 USPS or \$2.60 UPS.

## DX Radio Supply

MC/Visa orders 215 273-7823 or send check, money order, cash, MC/Visa to PO Box 360 Wagontown, PA 19376. PA res add 6% sales tax.



## ICOM Scanners Released

After a year of waiting, the new ICOM models R1, R100, and R72 are now available. A settlement between ICOM and Uniden Corporation of America has been reached in their dispute over patent rights.

Uniden Corporation of America acquired basic scanning patents when they bought out Electra and Regency several years ago.

A new ICOM model, the R7100, is expected to reach American shores by October. It has been in European distribution for several months. No price information was available at press time.

Meanwhile, a lawsuit filed by Uniden in Indianapolis against Crumm Development Corporation (who replaced former litigant Ace Communications) and AOR, has been continued. The next court date was not set at press time.

A source close to the industry told MT that meaningful negotiations would result in a settlement soon.

## Radio by Satellite

The Federal Communications Commission has granted a small Washington company permission to build, launch and operate the first satellite service designed to beam radio programs directly to home receivers.

WorldSpace Corp.'s Afrispace unit won FCC approval for an experimental license to launch and operate its Afristar satellite, which would provide radio service throughout Africa and parts of the Middle East. Listeners will need special car-mounted or hand-held receivers that are likely to cost as much as \$100. Because of the scarcity of electricity and batteries in Africa, the radios will most likely be solar powered.

The company plans to launch the \$40 million satellite, which is yet to be built, in 1993. WorldSpace Chairman Noah Samara says that he hopes that ventures such as the Voice of America and the BBC will also use his satellite.

## Scrambling for News

The FCC has approved a Notice of Proposed Rulemaking that will allow the use of digital voice emission for encrypting communications between remote pickup stations. According to *Radio World*, the new rule is designed to prevent third parties from eavesdropping and perhaps using the information, such as a news story, for its own use.

## US Culture Invades Woomera

According to *The Sydney Morning Herald*, mutterings of U.S. "cultural imperialism" are being heard in the small Australian town of Woomera. Apparently, there is fear that the small American community associated with the military communications base at Narrungar will begin broadcasting the services of the Armed Forces Radio and Television Network.

Some locals feel that the broadcasts would not only breach local broadcast law but compete with the local, Aboriginal-owned Imparja service.

Some Australians dismiss the whole affair. Says one, "It [AFRTS programming] is an instant source of world news in English and an entertaining, running commentary on American service life."

## VOA Returns to Germany

The Voice of America has resumed broadcasting to Germany following a 30-year absence. The new service began on 1197 kHz AM with a 30 minute news magazine called, *U.S. Report*. The program airs daily at 7:30 a.m.

The VOA began broadcasting to Germany in 1940 during World War II but dropped the programming in 1960 because of the decline of shortwave listening there.

## Rockin' the Kremlin

Next month, some 16 million people in Moscow and its suburbs will have a chance to

taste U.S.-style radio. Radio 7 goes on the air on October 1 with 60 kW of FM power.

Radio 7 is a joint project of the Soviet government and Ben Doud, a Gillette, Wyoming, businessman who is president of Top 40 KGWY-FM.

As part of the agreement, Doud splits ownership of the station 50-50 and gets a 10 year lease on the transmitter.

The Soviets also gave Doud permission to operate on shortwave until his FM transmitter is functional, but he is not sure whether he will put the HF station on the air, except perhaps to promote Radio 7.

Radio 7 is the seventh license the Soviets have issued in the FM band.

## He's Baaaaaack....

FCC Commissioner James Quello has been renominated for another term before the Senate Communications Subcommittee. Quello has been a commissioner since 1974; prior to that he was a broadcast consultant in Detroit and Washington.

## Tower Trouble: The Ham

A federal appeals court in California has ruled that ham radio operators are not entitled by Federal Communications Commission statutes to build tall antennas. The U.S. Court of Appeals denied a claim by Burlingame resident Vernon Howard, a licensed ham, who argued that federal law guaranteed his right to build a 51 foot tower in his backyard.





# COMMUNICATIONS

## Anti-Scanner Law Passes House Committee

Just at press time we learned of an amendment to the new "Federal Communications Commission Act of 1991" (H.R. 1674), Section 8 of which prohibits the manufacture of any scanner which is capable of cellular telephone reception.

The law will direct the FCC to deny type acceptance to any scanning receiver which can receive cellular frequencies or which can be easily modified to receive those frequencies.

The new law also prohibits the manufacture of decoders which can revert digitally-encoded cellular transmissions back to clear voice.

A full House vote is expected after legislators reconvene August 8th.

The court ruled that FCC regulations entitle ham radio operators only to fair consideration of their requests. The decision upholds a lower court ruling that validated Burlingame's authority to limit tower height to 25 feet.

## Tower Trouble: The Rate Hike

A number of radio stations that have broadcast towers located on federal land got quite a shock. Someone in the U.S. Forest Service noticed that the fees charged to the stations had not changed in 25 or 30 years and proposed a rate hike—8,000 percent. One station's annual rent would have jumped from \$500 to \$14,000.

Needless to say, a number of station owners were found walking the ledge outside their luxury condominiums.

Now comes word that the hikes won't be so hard to swallow. Rep. Norman Dicks (D-Wash) offered an amendment that reduced the rate of increase. The amendment was approved by the House Interior Appropriations Committee.

Currently, the U.S. Forest Service bases its fees on two-tenths of a percent of the cost of the tower. Revenues from the fees go to the U.S. Treasury.

## Radio Waves and the Heart

Radio waves delivered to the heart through a tube can cure some common forms of irregular heartbeats and eliminate the need for surgery, pacemakers or lifelong drug treatments, researchers report.

Doctors describe the technique as being highly effective for treating forms of tachycardia—irregularities that cause the heart to race suddenly. The new therapy is called radiofrequency current catheter ablation.

Three out of every 1,000 people have

tachycardia although no one knows precisely how common the condition is.

## Station on Vacation

John Mester of Brooklyn says he's as much in the dark as anyone. For the past week, viewers who've switched on Channel 30, Mester's television in Syracuse, has seen nothing but dead air. That's because his station manager switched off the station before taking a vacation in Florida.

"She called and said, 'I'm leaving now. I'm going to Tampa,'" Mester said. "She was the only one (of my employees) qualified to operate (the transmitter)."

If that wasn't bad enough, Mester can't remember her name. "I think it's in my office somewhere," he said.

According to the *Syracuse Herald-Journal*, channel 30's audience is so small that the station doesn't show up on local ratings surveys. In the week since the station went off the air, says the paper, only one person has called to ask what happened.

As of press time, Mester was planning to fly to Syracuse to get the station on the air at least for a little while or until he could find out when, and if, his manager is coming back.

Special thanks to Dave Alpert, New York; Harry Baughn, North Carolina; D.E. Bruce, N.S.W., Australia; Charles Brian Goslow, Worcester, Massachusetts; John B. Heaton, Largo, Florida; Karl Heil, Blue Mounds, WI; Vince Migliore, Santa Rosa, California; Howard Mortimer, Baldwinsville, New York; Alex Opiela, Austin, Texas; John James Ormond, Wilmington, North Carolina; Kramer Skreech; Poboscot, Connecticut; Rock Studd, Spittlebug, Texas and other anonymous readers for their contribution of information. It's people like you who make this magazine great!

## High Performance

**800MHz** • CORDLESS  
BABY MONITORS  
FREE CELLULAR OR CORDLESS  
FREQUENCY CHARTS



### MAX 800 GROUND PLANE

- Enjoy the best possible reception
- Hear signals other antennas miss
- Astounding performance outside
- Hear 10 times more signals when mounted directly on scanner
- Use on any scanner with optional adaptor or cable

50 ft. RG8—\$35.00 Only **\$19.95**

Base Adaptor—\$15.00

Hand Held Adaptor—\$12.00

### MAX CELLULAR MAG MOUNT

- Receive 800 MHz in car.
- Place on car roof and connect BNC cable to scanner
- 3dB - 14 inches high—GREAT!!

Only **\$39.95**



### MAX 46-49 MHz DIPOLE

- Be amazed by number of conversations heard
- Includes 50 ft. RG8X-BNC
- THE BEST!!

Only **\$49.95**

SASE for brochure  
US shipping &  
handling—\$4.00

**MAX System™**  
GROUND PLANE ANTENNAS

CK-MO-MC-VISA Accepted (MA add 5% sales tax)

Send payment to: Cellular Security Group,  
4 Gerring Rd., Gloucester, MA 01930  
Or charge by phone: (508) 281-8892

## New AOR Scanner

**1000 Channels.**  
**8-600MHz,**  
**805-1300**  
**MHz**



• Continuous coverage (except UHF TV 600-805)

• AM, FM and wide band FM tuning modes

• 10 Scan Banks, 10 Search Banks

• Selectable Priority Channel

• Selectable Search Increments, 5-955KHz

• Permanent memory backup

• 25 Day Satisfaction Guarantee

Full refund if not Satisfied

• No Frequencies cut out

• All normal accessories included

• Size 6 7/8"H x 1 3/4"D x 2 1/2"W

Wt. 12 oz

### AR1000

Total Price, Freight Prepaid

(Express Shipping Optional)

**\$499**

**ACE**  
COMMUNICATIONS

10701 E. 106th St. Indpls., IN 46256

Toll Free 800-445-7717

Visa and Mastercard

(COD slightly higher)

FAX (317) 849-8794





# Barging on the Erie Canal

by Everett L. Slosman

*We were 40 miles from All-ban-ay*

*Forget it I never shall.*

*What a terrible storm we had one night*

*On the Ear-eye-ee Canal*

*19th century American folk song*

Canal and waterway vacations came into fashion in Europe during the early 1980s. Spending a week or two as a canaler on a converted barge was considered *haute et bon*—in high fashion and good taste.

Those who followed the dictates of the latest fad salted their cocktail conversations with phrases like "buffer beam," "feed culverts" and "siphon locks." They may not have known the difference between a capstan and an oar, but they knew that in canal talk a land line meant an artificial channel, not a telephone.

However, it's not necessary to go to Europe to become a canaler. New York canals offer several ways to barge around. You can travel and monitor the bands at the same time.

There's something for everyone along the shores of the Erie Canal with spectacular views of the riverbank's wildlife and brilliant scenery, especially in early fall.

History buffs can tour scores of famous homes, battlefields, and museums. For those addicted to good food and pleasant accommodations, the canal area fronts a variety of delightful restaurants, country inns, and charming bed and breakfast homes.

So bring along your portable receivers and travel on the Erie. Monitor from a canal boat deck chair during the day and DX in a pleasant hotel room at night. This is portable listening under ideal circumstances.

Now, DeWitt Clinton, the New York governor who proposed a statewide east-west canal in 1809 was not concerned with tourists, vacationers and radio buffs. His interest was moving settlers westward to the Ohio and Northwest Ordinance territories, transporting bulk cargo both ways and making a personal buck.

Therefore, once the immigrant laborers finished digging "Clinton's Ditch" in 1825 it became the chief commercial and economic lifeline in the north. Without the Erie, settling the west

might have taken another generation.

Erie's role in transporting passengers and cargo put it in direct competition with the railroads. Even after railroads became the primary shipping sources, the Erie continued to be a viable alternative. It took trucks and the Interstate Highway system to downgrade the canal's commercial value.


As shipping declined, so did maintenance. The entire barge canal system, which includes Erie, Champlain, Oswego and Cayuga-Seneca required a major overhaul. New York began the process in 1958.

Now the rehabilitated waterway contains 57 locks, 524 miles of canal, and 300 miles of accessible rivers and lakes. Open from May through November, over 110,000 pleasure craft "lock through" portions of the system each year. Some commercial barges still use the system and canal water supplies hydroelectric power, irrigation, municipal water and wildlife conservation resources.

Early fall may be the best time to DX tour the Erie, though some canal mavens say April and May are also good months. Try to avoid the summer when the waterways are crowded and the on-shore prices are high.

Besides suitable clothing, a fresh log book and the right receivers, barging on the Erie requires the right vessel for proper ambience. Choose from structured one, two or three day cruises or get five other people together and barge around for a week in a 41 foot rental canal boat.

Several companies specialize in canaling and arrangements can be made for a suitable tour. Available vessels include animal-drawn tow boats or the 90-year old *Unger* or Mid-Lakes Naviga-

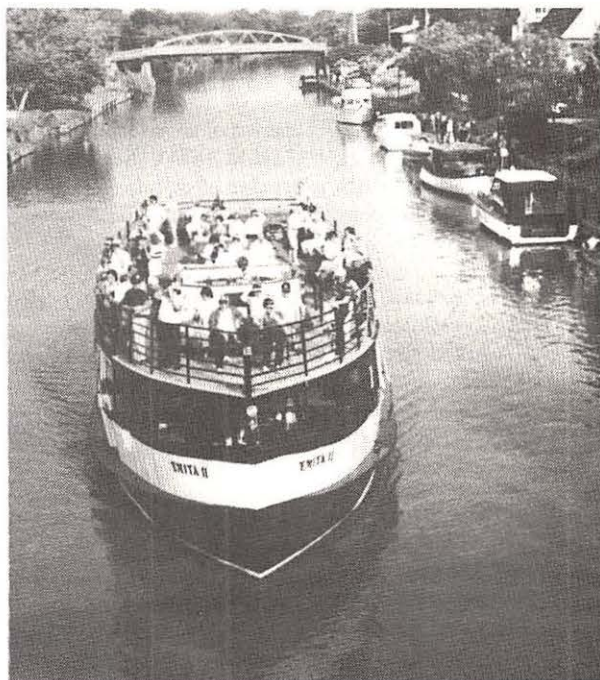

NYS Dept. of Trans.

tion Company's *Emata II*. Tour packages are available through October.

Just what can the dedicated DXer hear? Mediumwave enthusiasts can listen to prime 1- and 5-kW catches in canal towns with exotic names such as Herkimer and Pulaski. FM tea kettles pump out 3-kW signals all along the canal: Amsterdam, Rotterdam and Remsen.

Pack a copy of Gene Hughes' *Police Call Radio Guide* along with a scanner and monitor the alphabetical gamut from A.L. Lee Memorial Hospital in Fulton (158.280) to the town of Wheatfield (154.100).

For military aviation action, pack a copy of the Northeast edition of *Directory of North American Military Aviation Communications VHF/UHF*. The airways are loaded with signals from SAC's Griffiss AFB and Seneca Army Depot airfields. The Erie Canal runs under refueling area 609, so check for "Mother Hen and all her chicks."

When the locals become boring, try tweaking stations from the adjacent areas: Ontario, Massachusetts, Vermont, Pennsylvania and Ohio. A significant portion of the system parallels Lake Ontario. Near the canal's western terminus are the Niagara River, Lake Erie and Ontario's Welland Canal. They all produce fertile opportunities on the maritime and VHF-FM channels.

Of course, you can always use that DX-440 birthday present to see what's cooking on SW and the HF bands.

Mid-Lake's Erie Canal East cruise travels over a three-day period from Troy's City Dock to the company's facility in Brewerton. Passengers are bused back to Troy via the New York Thruway.





Mid-Lakes Navigation

*The Emata II Locking through from the Cayuga-Seneca to the Erie Canal near Montezuma, NY.*

During the trip the captain and crew take care of everything and you're free to concentrate on relaxing and monitoring.

Leaving Troy, the *Emata II* goes down the Hudson River and into the five locks known as the Waterford Flight. These lift the vessel 183 feet above the Hudson River and the view of the valley is almost overwhelming. While you're locking through, marine VHF-FM channel 13 (156.650) has plenty of canal chatter.

In fact, channel 13 is the primary frequency on the entire system.

*Emata II* spends the rest of the day gliding along the peaceful Mohawk River. One can almost picture James Fenimore Cooper's fictional characters keeping pace with the barge as it passes through Crescent, Vishers Ferry, Rexford Flats, Schenectady, Scotia, Rotterdam and Cranesville.

*Emata II* docks for the night in Amsterdam and unlike 19th century canal travelers, passengers sleep in a Holiday Inn.

The next day, *Emata II* goes past Tribe's Hill, Fort Johnson, Fonda, Yosts, Canajoharie, Fort Plain, St. Johnsville and Mindenville, ending the day in Little Falls. Everyone stays in the quaint Herkimer Hotel.

The third day the boat moves through Herkimer, Mohawk, Ilion, Frankfort, Utica, Whitesboro, Oriskany, and Rome; then swings west to New London, the Sylvan Beach lock and into Oneida Lake. Then, passing Cleveland and Constantia, she docks at Brewerton on the west side of the lake.

If you're still interested in scanning, the bus ride to Troy offers a chance to log the New York State Thruway Police and toll booth communications: icing on the three-day monitoring cake.

Which leads to *Emata II's* menu. After all, DXers cannot live on monitoring alone and it's all the calories you can handle included in the ticket price.

For a typical day's menu, breakfast features juice, eggs, breakfast meats, assorted pastries and cereals. The buffet lunch consists of soup, cheeses and luncheon meats, a hot chicken dish, pasta salad, assorted relishes and fresh fruit. For dinner, there will be something like champagne, soup, salad, prime rib with trimmings and dessert.

Captain Peter Wiles Sr. encourages informality, wandering about, stretching out on the spacious top deck and snoozing in the wheel-

#### Sources for additional information:

##### Canal trips and rentals

1. Collar City Charters, Troy, NY. 518-272-5341
2. Corn Hill Navigation, Rochester, NY 716-288-2340
3. Mid-Lakes Navigation Company, Skaneateles, NY 800-545-4318
4. Tug Urger, 518-457-1187

##### Canal travel information

1. New York State Department of Transportation, Waterways, State Office Campus, Building 5, Albany, NY 12232, 518-457-1187
2. New York State Department of Economic Development, Box 992, Latham, NY 12110, 800-225-5697
3. New York State Department of Environmental Conservation, 50 Wolf Road, Albany, NY 12223, 518-474-3521
4. Map information unit, New York State Department of Transportation, State Office Campus, Building 4, Albany, NY 12232, 518-457-3355
5. Office of Parks, Recreation and Historic Preservation, Agency Building 1, Empire State Plaza, Albany, NY 12238, 518-474-0456.

## DISCONE SCANNER ANTENNA

MADE  
IN  
USA

ONLY  
\$2900



- Receives all AM-FM & SSB frequencies.
- Gain improves with frequency increase.
- Mounts to any vertical mast 1" to 1½".
- Aluminum mount & elements.
- 8 cone & 8 disk elements—same as other discones selling for nearly 3 times our price
- Accepts standard PL-239 connector.

Order Direct From  
**Lakeview Company, Inc.**

3620-9A Whitehall Rd.  
Anderson, SC 29624  
(803) 226-6990

Add \$4.00 per order for shipping/handling  
Catalog Available • Dealers Welcome

## ELEVEN METER COMMUNICATIONS

The newest supplier on the east coast of c.b. radios, scanners antennas, microphones radar detectors, coax connectors, telephones answering machines & mobile accessories.

we carry a complete line of 27 Mhz. equip. and much much more.

catalog \$ 2.00

P.O. Box 3569

Poughkeepsie, n.y.  
12603

## World Probe

- \$29.95 • World Band Scanner Antenna  
+ \$3 P & H • Cuts Noise • Improves Reception • Indoors or Out •  
• Works with all World Band Portables and Scanners •  
• Sleek 6-ft Probe with Integral 25-ft Low-Loss Shielded Feedline •  
• Fully Insulated and Weather Sealed • Decorator White Design •

AntennasWest Box 50062-M  
801 373 8425 Provo, UT 84605

**FREE** Storage Pouch  
& Universal Connector Kit





Mid-Lakes Navigation

*A family of calm-water sailors explores New York's historic Erie Canal aboard a Lockmaster Hireboat from Mid-Lakes Navigation Co., Ltd. The boats are constructed by Mid-Lakes Navigation and patterned after the famed Narrow Boats that ply the canals of England.*

house. Naturally, channel 13 plays in the background.

*Emita II's* license allows her to carry 210 passengers, but Mid-Lakes limits overnight trips to 45 people. Those with time to spare can connect with the three-day trip to Buffalo and do the entire Erie Canal.

The West leg goes through Three Rivers, Belgium, Syracuse, Baldwinsville, Fox Ridge, Montezuma, Clyde, Lyons, Newark, Port Gibson, Palmyra, Macedon, Wayneport, Fairport, Bushnell Basin, Pittsford, Rochester, South Greece, Spencerport, Brockport, Holley, Hulburton, Hindsburg, Albion, Knowlesville, Medina, Shelby Basin, Middleport, Gasport, Lockport, Pendleton, and Tonawanda.

Monitoring each community on the Erie produces a log book worth showing and bragging about at the next *MT* convention.

Barging the Champlain Canal will net Whitehall, Comstock, Fort Ann, Smith's Basin, Fort Edward, Fort Miller, Northumberland, Schuylerville, Bemis Heights, Stillwater, Mechanicsville, Waterford, Troy and Albany: a good collection for a three-day effort.

A two-day Oswego Canal jaunt passes by Phoenix, Fulton, Minetto and Oswego. Two days on the Cayuga-Seneca Canal results in Ithaca, Cayuga, Seneca Falls, Waterloo, Geneva, Dresden, Montour Falls and Watkins Glen.

If you want to barge-it-yourself, Mid-Lakes rents a 41-foot Lockmaster by the week. They

furnish everything necessary for a safe journey including a VHF transceiver and provide three free hours of lockboating school for those would-be canalers requiring a little extra reassurance and a boost to the ego.

Imagine — an entire week with the gain cranked up and no complaints.

The following tables show some of the DX possibilities while locking through the Erie Canal.

*Oh the Ear-eye-e is arising  
And the gin is a-gittin' low  
And I scarcely think we'll getta drink  
Till we git to Buff-ah-low  
Till we git to Buff-ah-low.*



TABLE 1: ERIE CANAL VHF-FM MARITIME CHANNELS

Channel	Frequency	Use
6	156.300	Inter-ship safety. Required on all VHF-FM equipped ships. Also SAR communications with Coast Guard.
9	156.450	Commercial and noncommercial inter-ship and ship to coast. Contact marina and public docks.
13	156.650	Primary channel used at locks and bridges operated by the Corps of Engineers.
15	156.750	Environmental information. Receive only. Weather, navigation, time signals, notice to mariners.
16	156.800	Distress, safety and inter-ship calling channel.
17	156.850	State controlled channel. Used only for regulation, control, and rendering assistance.
20	157.000/ 161.600	Port operations ship-to-coast. Available to agencies directing port, lock and waterways traffic. Duplex channel.
21A	157.050	U.S. government only.
22A	157.100	Coast guard liaison.
23A	157.150	U.S. government only.
68	156.425	Noncommercial inter-ship and ship-to-coast. Used to communicate with yacht clubs, marinas and other vessels.
71	156.575	Same as channel 69
WX1	162.550	Weather-receive only.
WX2	162.400	Weather-receive only.
WX3	162.475	Weather-receive only.

TABLE 2: SELECTED 5 KW AND UNDER AM STATIONS ALONG THE CANAL

Albany	WABY-1400, WROW-590
Amsterdam	WCSS-1490, WSKD-1570
Baldwinsville	WSEN-1050
Brockport	WASB-1590
Buffalo	WBEN-930, WEBR-970, WGR-550, WHTT-1120, WGKT-1400
Herkimer	WYUT-1420
Little Falls	WLFH-1230
Lockport	WLVL-1340
Newark	WACK-1420
Rochester	WBBF-950, WEZO-990, WPXY-1280, WWWG-1460, WXXI-1360
Remsen	WADR-1480
Rome	WFRG-1450
Schneectady	WVKZ-1240
Syracuse	WNYR-1490, WFBL-1390, WHEN-620, WNDR-1260, WSIV-1540, WSYR-570
Troy	WHAZ-1330, WTRY-980
Utica	WIBX-950, WRUN-1150, WTLB-1310, WUTQ-1550

TABLE 3: SELECTED 3 KW AND UNDER FM STATIONS ALONG THE CANAL

Albany	WHRL-103.1, WKLI-100.9
Amsterdam	WKOL-97.7
Baldwinsville	WSEN-92.1
Herkimer	WYUT-92.7
Rome	WFRG-96.1



**TABLE 4: SELECTED PUBLIC SAFETY STATIONS ALONG THE CANAL**

Albany	Fire: 460.5500, 460.6250 Police: 155.3700 Local government: 154.0250, 158.7750
Albion	Police: 39.4000, 39.4600, 155.3700, 155.4300
Amsterdam	Fire: 46.1200, 46.1600, 46.2200 Police: 153.7400, 153.8750, 158.8350, 158.8950
Baldwinsville	Local government: 154.0400, 154.9650
Brewerton	Fire: 46.1400, 46.4600
Brookport	Fire: 46.0800, 154.1750, 154.2500, 154.3100, 154.3400 Police: 154.9400, 155.3700
Buffalo	Fire: 154.1900, 423.8250, 424.3750 Police: 460.4750, 465.0250, 465.3250
Canajoharie	Safety: 155.2200, 155.3400, 155.4000
Clyde	Police: 154.7250, 155.3700
Fairport	Fire: 154.1750, 154.3100, 154.3850 Local government: 46.5800
Frankfort	Fire: 46.2200, 46.3600, 154.2050 Police: 155.3700, 155.6100, 158.9700 Local government: 155.7750
Fonda	Safety: 155.1600, 155.3400, 155.4000
Fort Johnson	Fire: 46.2400
Fort Plain	Fire: 46.1000 Police: 154.7850, 155.3700, 155.6700, 156.0900
Herkimer	Fire: 154.2050 Police: 155.3700, 155.6100, 158.9700 Local government: 153.8600, 158.7450
Holley	Police: 39.1400, 39.4000, 39.4600, 153.3700, 155.4300
Ilion	Fire: 46.3600, 154.1300 Police: 155.3700, 155.6100
Little Falls	Fire: 154.3100 Police: 155.3700, 155.6100
Lockport	Fire: 46.4400 Police: 154.7550
Lyons	Police: 154.7520
Macedon	Local government: 158.8200, 453.7875
Medina	Police: 39.4000, 39.4600, 155.3700, 155.4300
Middleport	Police: 39.1400, 39.1800, 155.2500, 155.3700
Mohawk	Police: 155.3700, 155.6100, 158.9700
Newark	Fire: 46.4400
North Tonawanda	Fire: 144.1300 Police: 154.7550
Palmyra	Police: 155.7250, 155.2800
Pittsford	Local government: 37.1800, 45.2000
Rochester	Fire: 45.8800, 46.1000, 153.8300, 154.1300 Police: 155.0100, 155.3700, 155.4300
Rome	Police: 155.0100, 155.3700, 155.4300
St. Johnsville	Police: 154.7850, 155.3700, 155.6700
Schenectady	Fire: 465.6000 Police: 155.3700
Scotia	Fire: 46.0800, 46.2000
Spencerport	Fire: 154.1750, 154.2500, 154.3100
Sylvan Beach	Fire: 154.1300
Syracuse	Fire: 153.9500, 154.1450, 154.1900 Police: 460.2000, 460.2500, 460.3250
Troy	Fire: 453.5500, 458.5500 Police: 465.0750, 465.4000
Utica	Fire: 154.2500, 154.4000 Police: 155.3100, 155.3700

SOURCE: 1991 Police Call Radio Guide

## SOMERSET ELECTRONICS Announces... THE MICRODEC™ 'SERIES'

Made in USA

**NOW IT'S YOUR CHOICE!** You select the Model and the features to meet your decoding and budget needs\*! Each choice is fully upgradeable to the top of the line! With our new VIP50 Interface you can choose an expanded display (32x16 characters on your television) and hard copy -- with or without a computer!

Prices Plus Shipping/Handling

### FEATURES:

(Compact Size: 1.3Hx5.1Wx5.3D)

MORSE: DECODES CW WITH

Autospeed, software filter, speed display ★

RTTY (60,67,75, 100 WPM) (major shifts) ★

RTTY (bit inversion) ★

ASCII (110 & 300 BAUD) ★

ASCII (bit inversion) ★

AMTOR/SITOR Mode A-ARQ ★

AMTOR/SITOR Mode B-FEC ★

Smart display/Intensity control ★

On/Off with volume ★

Serial Interface ★

Code Oscillator ★

### AVAILABLE OPTIONS:

Display Colors: (Green standard--no charge) Red, or Yellow (your choice) .....\$15.00

NICAD Batteries for portability .....\$29.95 Model VIP50 Adaptor .....\$189.95\*

\*MD300 price includes the VIP50 Interface Adaptor.


(TV Stations, phone companies, and public utilities are selecting MICRODEC™ for their operational and FCC requirements - FCC Docket 86-337.)

**Call us for special introductory prices and orders at 1-800-678-7388.**

**Fax orders: 1-407-773-8097 • Technical assistance: 1-407-773-8097**

**VISA • MASTERCARD • PERSONAL CHECKS • MONEY ORDERS**

**SOMERSET ELECTRONICS, INC. • 1290 Hwy. A1A, Satellite Bch., FL 32937**

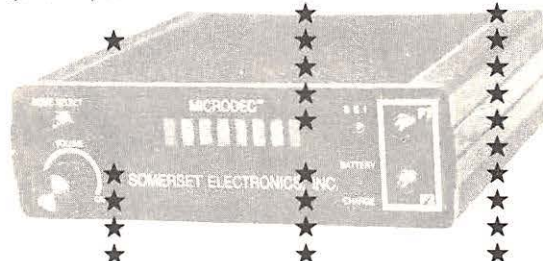

**TABLE 5: SELECTED MILITARY AERO FREQUENCIES OVER THE CANAL**

Albany area:	NY National Guard operations 41.0000, 122.7750; Albany Cty approach/departure 118.0500; control tower 119.5000; ground control 121.7000; Unicom 122.9500
Buffalo area:	Air National Guard tactical communications 120.1750, 225.5000; Greater Buffalo Int'l approach/departure 126.1500
Lockport area:	Griffiss AFB air ground communications support for Rome Air Development Center 236.0000; Remote air defense sites (code-Huntress) 228.7000, 228.8000, 229.1000, 233.6000, 234.7000, 235.8000
Refueling area 609:	276.5000, 282.7000
Rochester area:	Seneca Army Depot, Rochester approach/departure 119.5000, 120.7000, 296.9000
Rome area:	Griffiss AFB approach/departure 118.5000, 126.6500, 353.6000, 363.800; control tower 126.2500, 236.6000, 289.6000; ground control 275.8000; survival/rescue training 251.9000; air intercept control 364.2000
Syracuse area:	Hancock Air National Guard tactical command (code-Carnival) 32.4500, 35.1000, 36.8000, 38.5000; Hancock International 118.8500, 120.3000, 121.7000; operations/training command 141.8000, 143.8000

SOURCE: 1990-1991 Directory of North American Military Aviation Communications.



# A California Yankee Visits Radio Havana Cuba

by Michael Matus



Michael Matus

Left to right: Pedro Otero, Vice General; Gail Reed, English Coordinator; Milagro Hernandez Cuba, Director General; Ignacio Canal Bravo, Vice Director; Luis Pruna, Chief Engineer; Arnaldo Coro.

In 1962 I had just turned 15 when the U.S. photographed Soviet nuclear missiles on flatbed trucks in Cuba. I remember Kennedy's ultimatum on TV, the blockade, the kid at my high school hitting the fire alarm with a basket ball and everybody knowing this was WWII. Panic and paranoia. The panic has gone; has the paranoia?

Cuba remains an enigma to most of us still, and this year I felt I had to see the country for myself. U.S. law being what it is, this meant becoming a journalist in order to get a visa. I am an avid short wave listener, so it seemed appropriate to make Radio Havana Cuba (RHC) my target—especially since my visit would coincide with the official celebration of RHC's thirtieth anniversary at the May Day parade.

When I arrived at the Jose Marti airport just outside Havana, I was met by Arnaldo Coro, the host of the radio show *DXers Unlimited*, and my host during the visit. He whisked me through customs and out to a car and driver, and thus began my week long odyssey exploring Radio Havana Cuba.

Finding a hotel near Radio Progreso (the home of RHC) seemed to set the pace for the entire sojourn: nothing seemed planned yet everything somehow fell into place.

After a quick shower, off we went to Arnaldo's home west of the city. RHC's SSB test on 5965 kHz was in progress. Arnaldo had earlier given his home phone number on the air to report the SSB test. We sat in his shack, tuned to 5965 kHz, checked the signal and waited to see if anyone would call.

Among the first calls were two from Canada and one from a woman in Oklahoma. I was surprised; I had tried to call Cuba many times without success.

## The Meeting

When I arrived at Radio Havana Cuba for a scheduled interview with the Director General of Radio Havana, I found myself confronted with not only the Director General but all the other principles of the station as well. A survey around the room revealed a statue of Jose Marti, a

painting of Che Guevara and several photographs of Fidel Castro.

In awe and a bit of discomfort, I kept asking myself, "What is a conservative engineer from California doing, sitting at a table with a bunch of Cuban revolutionaries?" And the others seemed equally uncomfortable having me there.

The Director General, Milagro Hernandez Cuba, sat across the table from me. Also present were Ignacio Canal Bravo, Head of Programming; Luis Pruna, Vice Director, Chief Engineer, and a founding member; Gail Reed, English Language Coordinator; Pedro Otero, Vice Director for Foreign Language Broadcasting, and, of course, Arnaldo Coro, Host-Producer of *DXers Unlimited* and the science program at RHC. Arnaldo is on contract with RHC; his primary job is News Director at Radio Progreso. Gail Reed, whom I never did interview, was to serve as translator.

Introductions were made and coffee served. Two incidental impressions struck me during the pause: First, the coffee is pre-sweetened, extremely strong and consumed for its effect as well as a social tradition. It is served in demitasse cups smaller than Chinese tea cups and downed in one motion (reminding me of Club Med Tequila contests). Second, it seemed odd—and quite refreshing—that the "head honcho," Milagro Hernandez Cuba, was a "honcha," a woman, while the coffee was served by men.

The meeting began. Tension was thick; the questions and answers seemed staid and metered. But after the first hour, we had almost forgotten our fear and distrust of one another (Milagro confirmed to me later that they too were nervous about having a "Yankee" at the table) and were laughing, joking and asking each other questions closer to our hearts than how much power and how many languages.

## First Hour

Q. What is the purpose of Radio Havana Cuba?

A. (Milagro) In order to understand that, you must understand the beginning. On April 16, 1961, we were under heavy attack. This was the time of Playa Giron (the Bay of Pigs). We felt we needed to tell the world our side of what was going on, of our dreams. Announcement of RHC's





Michael Matus

*Radio Progreso — home of RHC*




Michael Matus

*The May Day Parade coincided with celebration of RHC's 30th anniversary*



Michael Matus

*The antennas atop the Radio Progreso building seen in silhouette against Havana Harbor.*

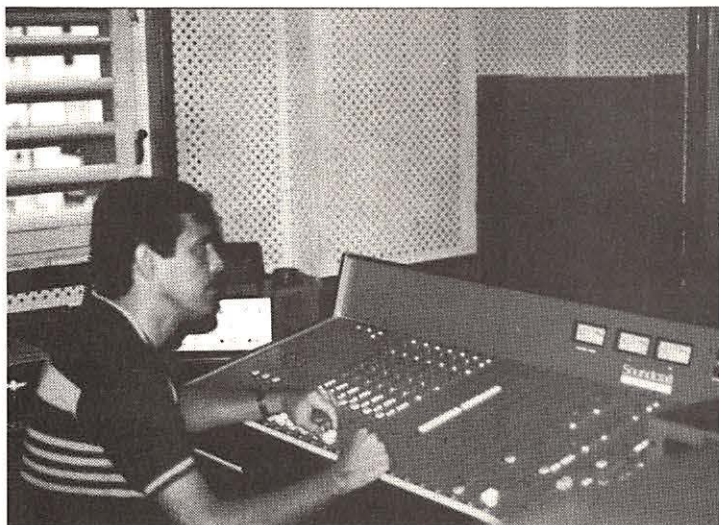

Michael Matus

*Chief Engineer Pruna at a mixer*

## 801-SCAN

### COMPUTER-CONTROL for ICOM

#### For the R71A....

NEW! Our 801HF listening control program is designed especially for the needs of the serious HF listener. It provides scanning but is also oriented toward scheduled events. Full-featured program includes Scan, Search, Auto-Search, Scheduled Scan, Channel/Bank organization, Terminal-Unit Window, and Notepad Database. 801HF is not just another scanning program!

#### For the R7000/R9000....

Transform your R7000/R9000 into the Ultimate Scanning Receiver! Add flexible control to match the R7000/R9000's superior receiving capabilities. Includes Scan, Search, Auto-Search, Fast Bank Switching, Activity % Logging and new Event Logging for detailed activity reports. The 801A Scanning System finishes what ICOM started!

Both programs let you scan/search forward or backward, quickly select from multiple scan-continue options and timers, read/set memories from your data, import channel data from any text file! They run on almost any DOS PC with 640K of memory.

801-SCAN is now part of Terzon Systems Inc. We have a voice mail order-info system at (214) 234-8222, mailbox 801.

Programs with interface and cable start at \$144.95. Program only (use your interface) from \$94.95. Demo disk \$5 (specify receiver). Check, M.O., MC/VISA. Texas residents add 8% tax.



Terzon Systems Inc.

P.O. Box 835921

Richardson, TX 75083



## Why buy a TNC?

### PC HF FAX + PC SWL \$119

### SPECIAL COMBINATION OFFER

For a limited time, if you order PC HF FAX \$99 (see our other ad in this issue), you can add PC SWL for only \$20 instead of our regular low price of \$99.00.

PC SWL contains the hardware, software, instructions and frequency lists needed to allow you to receive a vast variety of digital broadcasts transmitted over shortwave radio. All you need is any IBM PC or compatible computer and an SSB shortwave receiver. The product consists of:

- Demodulator
- Digital Signal Processing Software
- 80 Page Tutorial Reference Manual
- World Press Frequency List
- Tutorial Audio Cassette with Samples

PC SWL automatically decodes Morse code, Radio Teletype, FEC (forward error correcting code), SELCAL (selective calling transmissions), and NAVTEX.

PC SWL lets you tune in on world press services with up to the minute news, meteorological broadcasts, ham radio operators, coastal shore stations, aviation telex and much more digital action on the shortwave bands. Find all the utility station action you have been missing. PC SWL software uses the processor in your PC to do the work, why pay for another expensive box when a simple interface and your PC can do the job?

#### ADVANCED FEATURES:

- Tuning Oscilloscope
- Digital Waveform Presentations
- Auto Calibration and Code Recognition
- Continuously Tunable Filter Frequencies
- Variable Shift
- Adjustable CW Filter Sensitivity
- Unattended Capture and Printing

**Software Systems Consulting**  
615 S. El Camino Real, San Clemente, CA 92672  
Tel: (714) 498-5784 Fax: (714) 498-0568



creation was made by Fidel Castro on that date.

Now, thirty years later, we are broadcasting in nine languages: Spanish, English, Arabic, Creole, French, Kechua, Esperanto, Portuguese, and Guarani. We broadcast daily.

Our main emphasis is on broadcasting what's happening in Latin America, not only political but cultural and economic news. Now we have a very important task, and that is to work toward unity of all the Americas.

Asked about their news sources, they listed APN, CNN, Reuters, UPI, EFI (from Spain) and others: altogether twenty-two major sources at last count, "and, of course, Peter Arnett during the Gulf war."

When questioned about the music they broadcast, Milagro was adamant in saying that unlike other stations, music at RHC "is not a filler; it is thirty percent of our programming."

Well into the second hour, questions and answers became free-flowing and by no means one way. Talk drifted here and there; twenty minutes or so were given to discussion of my query as to RHC's sign-on. In their English broadcast it is, "First free territory in the Americas." In Spanish it is "Territorial Libre en

### Radio Havana English Language Schedule

TIME (UTC)	FREQ kHz
0000-0200	11950
0200-0400	15140
	11950
0400-0600	15140
	11950
	11760
	5965
0600-080	11760

America."

I still don't understand it (they admitted the phrase doesn't translate well into English), but the explanation went something like this: What the slogan is trying to say is that Cuba is independent. Jose Marti, the founding father of Cuba, said there is a first independence, which is the independence from Spain, and a second independence, which is the independence from the United

States.

There was some talk of Radio Marti and TV Marti and the complaints about the stations' use of Marti's name. Since Jose Marti is a Cuban national hero, such usage is viewed as a deliberate insult.

The programming of TV Marti, especially, is sort of a joke. I asked strangers on the street what the programming is like, and someone said "Alf: that's the type of programming that is beamed to us."

Two hours after it started the meeting came to an end, with much less "busyness" and much more friendly chitchat and plans for the remainder of my visit. The fear was gone from both sides. We were no longer people who viewed each other as bent on each others' downfall but as persons dedicated and proud of our jobs and our countries. We had become friends.

### The Radio Station

The station, occupying two floors of the Radio Progreso building, is amazing. You have to understand that because of a combination of the ongoing U. S. embargo and the Soviet Union's recent virtual abandonment of Cuba due to its

### Profiles of Some of the Players:

**Arnaldo Coro.** Arnaldo has to be one of the most enterprising and resourceful people I have ever met. He is News Director for Radio Progreso as well as having the two magazine programs on RHC. If there is a fire in the Cuban radio world, Arnaldo has an iron in it.

**Milagro Hernandez Cuba.** Yes, it is her real name. Milagro came up through the ranks, beginning as a typist with RHC and now Director General. She commands the respect of some 300 employees and does so with a combination of thought, compassion, determination, warmth and humor.

**Lila Haines,** English Language announcer. Irish born, economist, proud mother of two, Lila has long been impressed with RHC.

**Meic Haines,** also English language. Lila's husband, Meic is Welsh born, has political sympathies with Cuba, and sees a parallel with England and Wales. He was four years with *Prensa Latina* (the Cuban press) before signing on with RHC.

**Isabel Garcia,** English Language announcer. Isabel was born in Brooklyn, NY and came to visit in 1979 with her Cuban mother. She came back to live in 1987. "I've always felt Cuban emotionally," she says.



*Arnaldo Coro taping*



*Lila & Meic Haines, English broadcast announcers*

*Milagro Hernandez Cuba cancelling first day cover RHC 30th anniversary*



*Isabel Garcia, English broadcast announcer*




photos by Michael Matus



# Don't Miss The Radio Event of the Year!! 1991 MONITORING TIMES CONVENTION

*Last Chance to Pre-Register!*



## Meet Your Favorite Experts

### Larry Magne

(Publisher, Passport to  
World Band Radio)  
*Choosing a Shortwave Receiver*

### Larry Van Horn

(MT Columnist)  
*Utilities & Military Monitoring*

### Howard Perry

(President, Advanced  
Electronic Technologies)  
*Electronic Surveillance*

### Jack Sullivan

(Publisher, Hunterdon Aero)  
*Military Aero Monitoring*

### Jean Baker

(MT Columnist)  
*Air Band Monitoring*

### Bob Grove

(Publisher, Monitoring Times)  
*Equipment & Listening Tips*

### Gerry Dexter

(Tiare Publishing)  
*Secrets of QSLing*

### Ken Reitz

(MT Columnist)  
*Satellite Monitoring*

### Skip Arey

(MT Columnist)  
*Beginners Topics*

### Frank Terranella

(Author, Listener's Lawbook)  
*Your Monitoring Rights*

### Fred Osterman

(President, Universal Radio)  
*Equipment Bargains*

### Bob Kay

(MT Columnist)  
*Scanning Basics*

### Gene Hughes

(Publisher, Police Call)  
*Communications Systems*

### John Santosuosso

(MT Columnist)  
*Unlicensed Broadcasters*

*And Many More...*



## Dozens of Exhibitors

Intercept, Inc.

Advanced Electronic  
Technologies

Grove Enterprises

Voice of Germany

Radio for Peace Int'l.

Hunterdon Aero Publishers

IBS \* Austin Antenna

Somerset Electronics

Cellular Security Group

Xenolith Press

JRC \* AIE Corp.

RL Drake \* Delta Research

Christian Science Monitor

National Scanning Report/  
Bearcat Radio Club

Opto-Electronics

Datametrics

Universal Radio

ANARC Clubs

*... and more*

## Sign up for the 1991 Monitoring Times Convention

- ☐ Enclosed is my \$35 registration fee.  
☐ \$19.95 banquet payment (Buffet featuring baked lemon  
chicken & roast beef in wine sauce. Tax & tip incl.)

*Please Rush My Registration Package ...*

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State/Prov. \_\_\_\_\_ Zip \_\_\_\_\_

Phone (\_\_\_\_) \_\_\_\_\_

Send your check or money order to Monitoring Times  
Convention, P.O. Box 98, Brasstown, NC 28902.  
MC or Visa, Call 704-837-9200

## KNOXVILLE, TENNESSEE

*October 4, 5, 6 1991 at the Hyatt Regency*

## RESERVATIONS

*Hyatt 615 637-1234 \* Best Western 615 521-5000*

## FREE AIRPORT SHUTTLE

*Friday and Sunday*





Bill Black

*Balloon display in front of Union of Young Communists' building blasts TV Martí, which beams its signal from a dirigible tethered off the coast of Florida.*

own problems, this island has very little in the way of goods. You can't go to the store and buy a pack of AAA batteries.

In fact, you can't go to the store! I never saw a store open for business. What I did see here and there was a garage door opening and a line people with their ration books (everything is rationed in Cuba) lining up to buy the week's ration of eggs or coffee.

So, there was no way to purchase new parts. The station was running on old British preamps, Hungarian tape recorders, homemade mixers and

two year old Soviet electronics with twenty-five year old technology, all ingeniously wired together into a harmonious system.

There were no cables lying around on the floors to trip over, as I have often seen at U.S. stations. Everything was done with care and pride. The Cuban engineers have become masters by necessity: having no replacement heads for the Hungarian recorder, they make their own.

## The Bauta Transmitter Site

As you enter the site at Bauta (about 15 miles west of Havana), the first thing you notice, naturally, is the 550 tons of steel that make up the main antenna tower. The rest of the antenna farm consists of 32 broadband dipoles plus various other designs.

Chickens, goats and other livestock roam around under the transmission lines and through the guy wires. This is because of the Cuban philosophy that you produce food wherever it can be produced. It gave me a whole different perception of what an "antenna farm" can be.

Entering the giant cube of a building, I was met by Dictinio, the Chief Engineer and also a founder (He was there when they threw the first switch thirty years ago.) He is very much a father figure and is known by the staff as "Dictinio." I asked several people for his last name but they shrugged and said they couldn't remember, just Dictinio.

After the obligatory tray of tiny cups of coffee, the Chief started our tour. The route was logical; first the input, with its PBX style matrix. Plug the headphones in here and "voila," the English language feed. Over here I listened to Creole, there Guarani.

Now down the hall to a room containing all sorts of equipment with names I've never heard of: a MOGI made in the USSR. It struck me as odd that a lot of Soviet units were stamped "Made in the USSR"—in English. Oh well. I know very little about politics and even less about economics.

Centered in the racks at Dictinio's eye level was a frequency counter. As he switched through the transmitting frequencies—11820, 15140, 5965—he kept pointing to the Nixie tube readout (an early digital technology) 5965001-5965002-5965001. A proud man, all transmitters running with a tolerance of 1-2 Hertz! I had the impression that when his "children" were operating as he thought they should the Padron was a very happy man.

While I was at the transmitter site a group of men from the Cuban Academy of Geophysics were setting up equipment for ionospheric research, sharing the rows of transmitters. Here again old and new worked together as one. Thirty year old Swiss 10kW Brown Boveris alongside the newer Russian 250kW Sniegs (translates as "snow"). Where did they get the parts? Cuba has precious little "hard currency." They can and do fabricate a lot themselves, but there must still be a lot of fancy trading going on.

## Epilogue

Most of my evenings were free and I spent those in a park across from the University of Havana, talking with people. The only people who told me they wanted to leave Cuba were two teenaged boys who wanted to go to Miami and "start a rap group." I suggested they stay in Havana a little longer.


I certainly don't pretend to be an expert on Cuba after a one week jaunt there; no one could be. What I brought home with me was a headful of impressions.

I came back to the United States still very much a capitalist but deeply impressed with Cuba. I've traveled extensively through Latin America and have seen the poverty and deprivation of other Third World countries. I found Cuba to be unique. The Cuban people have something that seems to work for them. No one is starving, medical care is probably the best in Latin America. Perhaps they don't have everything they want, but they do have most of what they need. And their capacity to improvise with what they do have is amazing.

But to my friends at Radio Havana Cuba I still say: get a different sign-on!



*Bill Black, a frequent MT contributor who was in Cuba on another journalistic assignment, also witnessed the May Day parade and provided us with our cover shot and several other photos.*

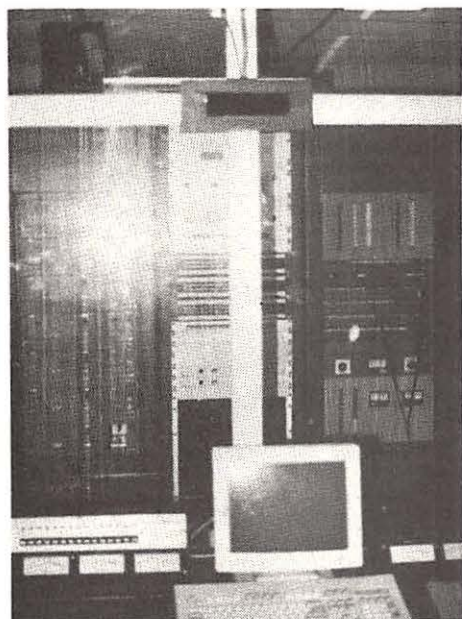

Michael Matus

*The link to the transmitter site.*



# AEA is the...

## Shortwave Solution



The IsoLoop 10-30 HF antenna is designed to work in limited space applications — apartments, condos, etc. Don't be deceived by its compact size (43" diameter) — it really works! Features include: Continuous coverage from 10 to 30 MHz; narrow bandwidth to suppress out-of-band signals; comes fully assembled (no mechanical joints); much more.

For complete information on these or any other AEA products, call the toll-free Infoline at (800)432-8873.



**Advanced Electronic Applications, Inc.**

P.O. Box C2160 Lynnwood, WA 98036  
Tech. Support/Sales (206)775-7373  
Upgrade Line (206)774-1722  
FAX (206)775-2340  
CompuServe I.D. 76702,1013

Hayes® Hayes Microcomputer Products.  
Hercules™ Hercules Computer Technology, Inc.  
Commodore 64 and 128® Commodore  
Business Machines. Macintosh® Apple  
Computer Inc. Epson® Seiko Epson Corp.



The PK-232MBX is a must for the digital Shortwave Listener. By far the most popular multi-mode controller ever, it can receive seven different types of data signals including Morse code, Baudot, ASCII, TDM (Time Division Multiplex), WEFAX, NAVTEX and Packet. It also features: The indispensable SIAM which automatically identifies many types of digital signals; superior software support for PC compatible, Macintosh and Commodore 64 and 128 computers.



AEA-FAX is simply the best way to demodulate multi-level grey scale fax images received by your general coverage receiver. All necessary hardware and software is included in the package which also features: On-screen tuning "scope"; Autolist feature for unattended image capture and save-to-disk; "Daisy-chain" external RS-232 input allows AEA-FAX to share a COM port with a PK-232MBX or other Hayes-compatible device; up to 16 grey levels (VGA); also supports EGA, CGA and Hercules formats; prints to HP LaserJet or Epson compatible printers.



## Sarasota Citizens' Patrol:



# The Eyes and Ears of Law Enforcement

by David Sutcliffe



**Y**ou might get some argument if you tried to rank the top three listening targets of scanner owners, but I don't think anyone would disagree that law enforcement frequencies would be on the list. You have probably listened to countless exchanges and episodes involving the police or sheriff's department. How many of you can say you have actually talked over a police radio?

Well, in Sarasota County, Florida, many of the 13,000 Citizens Patrol volunteers have had

that experience. Each of 115 patrol groups has at least one hand-held two-way radio assigned to it by the Sarasota Sheriff's Department. It's the same radio equipment utilized by working deputies.

In fact, it is the use of actual police radios that makes the Sarasota County Citizens' Patrol program unique. I know of no other law enforcement agency anywhere that permits such volunteers to communicate on an official police frequency.

According to Sheriff's Corporal David Hart, who supervises the program, there is very little misuse of radios or air time by Citizens' Patrol volunteers. This is due, at least in part, to a careful training session given to each volunteer by Cpl. Hart or one of the six deputies who assist him.


When and how to use the radio is taught along with the philosophy of Citizens' Patrol -- being the eyes and ears of law enforcement. The volunteers, who work in two-person teams, are a vital part of crime prevention. They make their

own neighborhoods safer by observing, listening and when appropriate, reporting emergencies or anything or anyone suspicious to the 9-1-1 dispatch center.

Only emergencies are reported using the police hand-held radio. Other reports are made by landline or cellular telephone.


Most volunteers serve a two-hour shift about once a month. Each patrol group has a captain who is responsible for scheduling. The patrol group captain is also the primary liaison with the sheriff's department.

Every six months, all citizen patrol captains and deputies from the crime prevention unit hold a meeting. The most popular recent gathering, says Sheriff's Captain Terry Lewis, was when the department helicopter landed at the meeting site. Captain Lewis

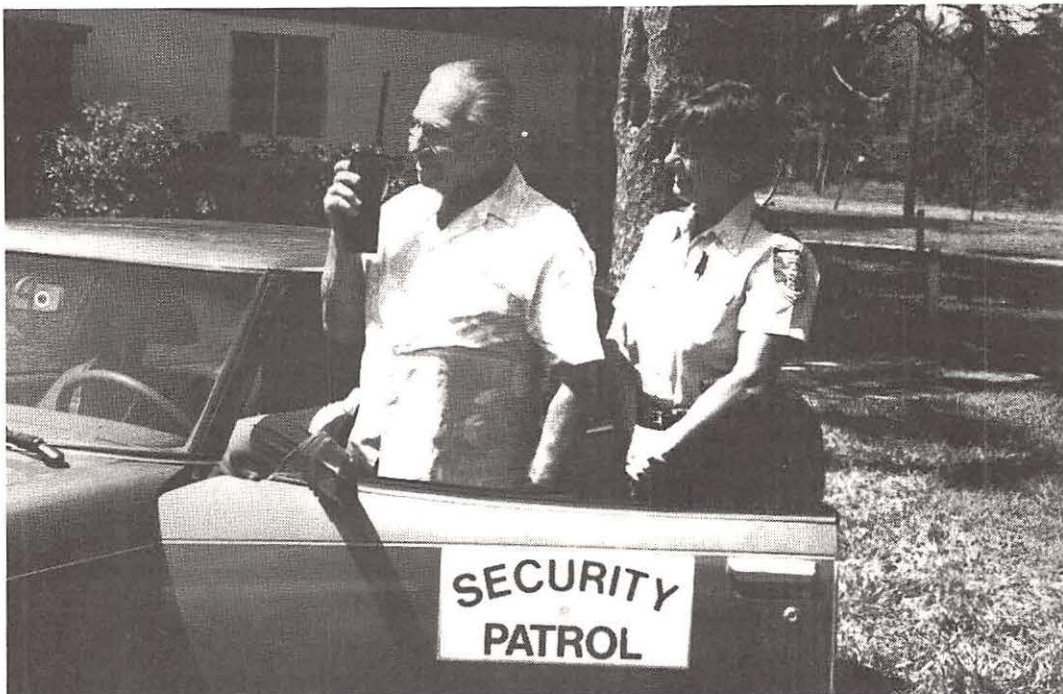

**Citizen's Patrol member W. Ellis Denham working together with Deputy Jackie Barber of the Sarasota County Sheriff's Department.**



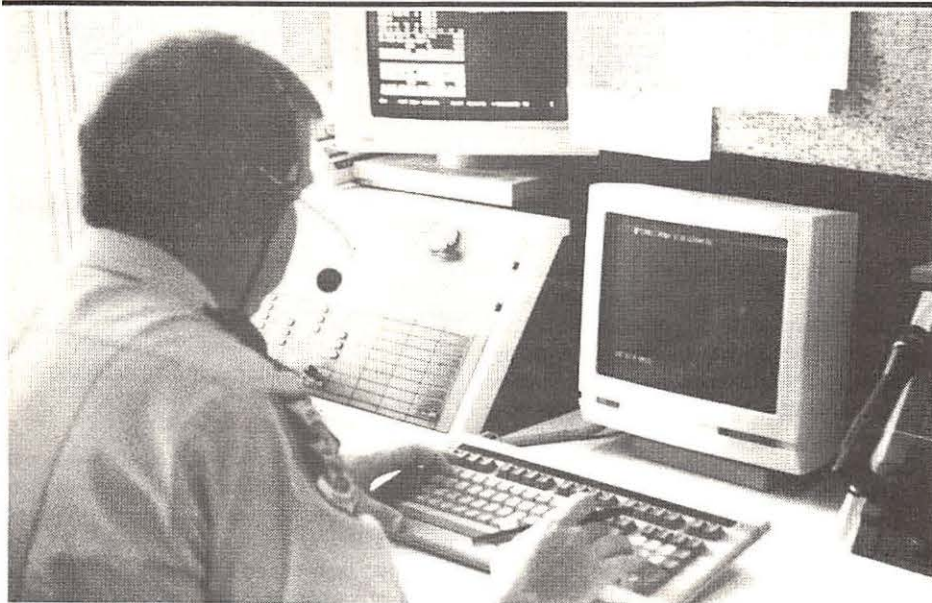

**Lynn Platt, a 911 dispatcher, works the "channel four" position (154.815 MHz) used by citizen patrols.**

is responsible for crime prevention, the 9-1-1 dispatch center, and is team leader of the sheriff's SWAT team, among other duties. His SWAT team gave an impressive demonstration to the patrol captains.

### What makes Sarasota so special?


Sarasota has a large retirement community—attracted by an ideal climate and plenty to do. The

area is known as the cultural capital of Florida. Numerous theaters, the world-class Ringling Museum of Art, and its own opera and ballet company are some of the features enjoyed by residents and visitors alike.

Retired attorneys, judges, doctors and many other professionals serve as citizens' patrol volunteers. But you don't have to be retired or a professional to be a citizen patroller. Any responsible person at least 18 years of age and residing in the neighborhood covered by the patrol group is welcome.

Ongoing research by the Sarasota Sheriff's Department consistently demonstrates that citizens' patrols work. Crime rates for residential burglary, vandalism and similar offenses are lower in areas with citizen patrollers on duty as compared to like areas without such a group.

Cpl. Hart attributes this, at least in part, to the deterrent effect of specially marked patrol vehicles. (Actually one magnetic "security patrol" sign is passed from one patrol team to the next at shift change.) Additional crime prevention programs are promoted by deputies during training sessions and meetings of neighborhood organizations.

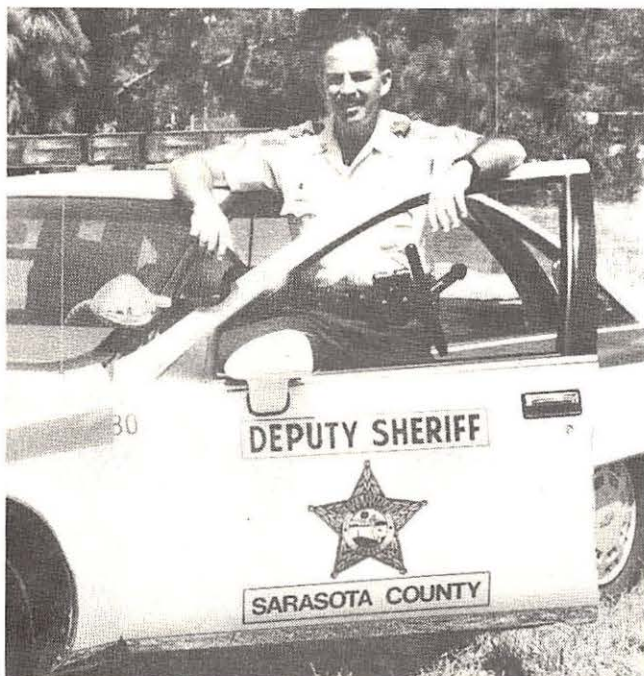

**Cpl. John Herlihy, patrol supervisor.**

## GILFER — first in Shortwave

The Best Active Scanner Antenna Gets Better and Better...DRESSLER ara-1500.

Latest model in the evolution of this famous series, the 1500 offers wider freq. coverage (50-1500 MHz), high gain (11-16dB), and easy installation (indoors or out, vertically). Ideal for the ICOM R7000 and other wideband VHF/UHF receivers. Includes 12 vdc power supply, coupler, 25' coax, and mounting hardware \$189.95 (+\$10).

### VISIT GILFER'S STORE

Easy to find, accessible from New York City. Take Garden State Parkway (NE portion of N.J.), Exit 172. Gilfer is in the center of Park Ridge, opposite the Borough Hall. Store hours: M-F 10am-5pm, Sat. 10am-3pm.



Order operators: 1-800-GILFER-1  
(1-800-445-3371) NJ 201/391-7887

**GILFER SHORTWAVE**  
52 Park Ave. • Park Ridge, NJ 07656

## The Radio Collection

1992 PASSPORT  
TO WORLD BAND RADIO  
\*\* \$14.95 \*\*

RADIO T-SHIRTS  
\*\* \$15.95 \*\*

"Once Upon A Golden Time"  
(Tube Radio & Flared Horn Speaker - Gold on black shirt)


"SWLs Do It With Frequency"  
(Globe and Antenna - Brightly Colored shirt)

\*\* \$2.00 Bonus Certificate with Every Order \*\*

US Orders Postpaid, add \$2.00 for Priority Mail.  
NY Residents add Sales Tax. \*Shirts are One Size Fits All.

P.O. Box 149, Briarcliff Manor, NY 10510  
Where Radio Is Fun Again!

FREE  
SAMPLE  
COPY!



## ANTIQUE RADIO CLASSIFIED

**Antique Radio's Largest-Circulation  
Monthly Magazine**

Articles - Classifieds - Ads for Parts & Services  
Also: Early TV, Ham Equip., Books,  
Telegraph, 40's & 50's Radios & more...

Free 20-word ad each month. Don't miss out!

1-Year: \$27 (\$40 by 1st Class)  
6-Month Trial - \$15. Foreign - Write.

A.R.C., P.O. Box 802-P7, Carlisle, MA 01741



For example, residential and business security surveys are performed free of charge by specially trained deputies. They advise the homeowner or business manager about the adequacy of locks on doors and windows, alarm systems and exterior lighting.

Another crime prevention program, Operation Identification, can be important to SWLers and scanner enthusiasts. To participate, an engraving tool, which can be purchased at reasonable cost at hardware stores, is used to etch your driver's license number on your receiver. Other valuable possessions such as television sets, stereo equipment, cameras, and kitchen appliances should be marked as well.

An Operation Identification sticker displayed in windows near the doors acts as a deterrent. Marked property is very hard for the crook to dispose of, and the items can be traced back to you if they are recovered.

After the training session, each volunteer is issued an official ID card by the Sarasota Sheriff's Department. Periodic refresher training is also

provided by a deputy assigned to the citizen's patrol program.

## Learning the limits

Volunteers are no substitute for professional law enforcement personnel. An important part of the training relates to the role of volunteers. They are not permitted to arm themselves with any kind of weapon while on duty. Other no-nos are leaving the vehicle to investigate a suspicious person or a crime, verbally or physically confronting a suspect or consuming alcoholic beverages before or while on patrol. "Leave the active police work to the professionals," is the message drummed into volunteers.

But when a patrol team sees a crime in progress, a fire or other emergency -- there is no middle man. They talk directly with a 9-1-1 dispatcher by radio. It is also possible for the patrol team to communicate directly with the deputy responding to the call. Only deputies and citizen patrols have police radios. Even private security firms must depend on cellular phones or

other less direct forms of communications with law enforcement.

Citizen patrol communications are conducted on one of the four frequencies used by the Sarasota Sheriff's Department. Citizen patrols share channel four (154.815 MHz) with detectives and administrators. This works well because most patrols are in the evening or night-time hours when detective or administrative radio traffic is light.

All routine dispatching and car-to-car communications are handled by the computerized radio data link system used by the Sarasota Sheriff's Department for more than 10 years. What may be heard on a scanner are "hot" calls, particularly when more than one deputy is needed. Anything helpful to those engaged in illegal activities won't be on a voice channel—it would be sent via the digital radio data link system.

It will be a whole new ball game in about two years when an 800 MHz trunking radio system begins to be phased in. But that is another story.

mt

## TEN SIGNALS

10-1	Receiving Poorly	10-44	Pick Up Papers
10-2	Receiving Well	10-48	End/Did You Receive
10-3	Stop Transmitting	10-50	Stopping Vehicle
10-4	Acknowledgement	10-51	Enroute
10-5	Relay To	10-52	Estimated Time of Arrival
10-6	Busy (Making Investigation)	10-54	Negative
10-7	Out of Service	10-55	Car Calling to Car
10-8	In Service	10-56	Meet At
10-9	Repeat (Conditions Bad)	10-57	At Pistol Range
10-10	Temp. Out of Service (Meals)	10-59	Send Teletype To
10-11	Dispatching Too Rapidly	10-60	Assist DAV
10-12	Visitors Present	10-62	Need Road Supervisor
10-13	Weather/Road Conditions	10-63	Need Bomb Squad (Scene)
10-14	Transport	10-64	Need Crime Lab Tech
10-15	Prisoner in Custody	10-66	Cancel
10-16	Pick Up Prisoner	10-68	Need Crisis Intervention Person
10-17	Suspect Present	10-70	Send Wrecker
10-18	Complete Assignment Quickly	10-71	Send Ambulance
10-19	Return To Station	10-72	Send Helicopter
10-20	Your Location	10-74	Everything 10-4, Busy
10-21	Call (By Phone)	10-76	Digital Emergency Status Indicated
10-22	Disregard	10-78	Out of Car, Available for Call
10-23	Stand-By	10-87	Out of Car on a Walkie
10-24	TROUBLE SEND HELP	10-88	Where Can You Be Reached By Phone
10-25	Contact	10-89	On Page Service
10-26	Message Received	10-90	Scramble
10-27	Check Drivers License	10-93	Detective Needed At
10-28	Check Registration	10-94	SEND BACK UP CAR
10-29	Stolen and/or Wanted	10-97	Arrived At Scene
10-30	Against Rules and Regulations	10-98	Completed Last Assignment
10-31	In Pursuit	10-99	Possible "Hit"
10-32	Is DUI Oper. Available	10-100	Alert-Remain in Contact with Station By Phone?
10-33	Emergency Room	10-104	Computer System Down
10-34	Jail Break	10-108	Off Duty in Assigned Vehicle
10-35	Confidential	10-109	Log On Digital
10-36	Correct Time	10-110	Log Off Digital
10-38	Block Roads At	10-111	Acknowledge Digital Message
10-41	In Possession Of	10-112	Request SWAT Team
10-42	Out Of Service-Home	10-113	Request SURF Team
10-43	Any Traffic For		

## DISPATCH SIGNALS

0	Armed and/or Caution	35	Sexual Battery
1	Drunk Driver	36	Fight
2	Drunk Pedestrian	40	Vandalism
3	Hit and Run	41	Robbery/Hold Up
4	Accident	43	Lewd/Lascivious Act
5	Murder	45	Airplane Crash
6	Escaped Prisoner	46	Bomb Threat
7	Dead Person	48	Battery
8	Missing Person	49	Alarm
9	Stolen Tag	57	Drug Case
10	Stolen Car	59	Fire Bombing
11	Abandoned Vehicle	60	Sniper
12	Reckless Driver	61	Gambling
13	Suspicious Vehicle	62	Racial Trouble
13I	Suspicious Incident	65	Shoplifter
13P	Suspicious Person	69	Animal Problem
14	Information	73	Child Abuse
15	Special Detail	75	Surveillance/Stakeout
16	Highway Obstruction	76	Property Damage
18	Felony	77	Arrest
19	Misdemeanor	78	CINOS
20	Mentally Ill Person	79	Car in Ditch
21V	Burglary-Vehicle	81	Suspicious/Obscene Phone Calls
21B	Burglary-Business	82	Found/Lost Property
21R	Burglary-Residence	83	Public Service-Includes
22C	Disturbance-Civil		Death/Emergency Messages
22F	Disturbance-Family	84	Injury/Sick Person
22J	Disturbance-Juvenile	85	Trespassing/Unwanted Person
22M	Disturbance-Motorcycle	86	Transport Prisoner
22N	Disturbance-Noise	87	Patrol Requested
23	Pedestrian/Hitch-hiker	88	Open Door/Window
24	Kidnapping	89	Threat/Harassment
25	Fire	90	Assist Other Agency
26	Drowning	91	Illegal Parking
27	Prowler/Peeping Tom	92	Illegal Dumping/Burning
28	Riot	93	Worthless Document/Checks/Forgery
29	Reckless Opr. Boat	94	Disabled Vehicle
30	Larceny	95	Abandoned 9-1-1 Call
31	Assault	96	Repossession
32	Suicide	97	Watering Violation
33	Shooting	100	Career Criminal
34	Stabbing		

NOTE: 10-1 through 10-108 are county wide signals  
10-109 through 10-113 are only used by the Sheriff's Department

Code 1 - Lights & Siren + Safe Speed  
Code 2 - Lights & Siren + 10 mph max. over speed limit  
Code 3 - Normal

0 through 73 are county wide dispatch signals  
81 through 104 are in use by the Sheriff's Department





# NATION'S LARGEST SWL DEALER

Minutes From  
Washington D.C.

Coming Soon the *New* 1992 EEB Catalog!

## SONY ICF SW77



From the genius of Sony, the world's most advanced portable Receiver. Factory programmed, 100 of the most popular SWL stations which you can reprogram yourself. ICF SW77 is a full featured hi-tech receiver with nothing left out.

- \* .15-30 MHz/76-108MHz
- \* 160 Memory Pre-set
- \* AM-FM SSB
- \* Wide-Narrow
- \* Synchronous Detection

\$499.00 plus shipping

*It's Time To Upgrade!*

## SONY ICF SW7600




This is our number one selling mid-sized portable.

- \* .15-30/76-108 MHz
- \* 10 Station Memory
- \* Full SW Coverage .1-30MHz
- \* Dual Conversion
- \* AN61 Antenna Incl.
- \* Clock, Timer, Alarm
- \* AM/SSB/FM/FM Stereo
- \* Direct Keyboard Entry
- \* Power (4) AA Not Incl.
- \* 7 1/4 x 4 3/4 x 1 1/4 wt. 22 oz.

\$219.95 plus shipping

*#1 Compact Portable!*

## ICOM R1



We waited a long time for this one!

It covers everything, BCB, SW, V/UHF, Cellular to 1300MHz.

- \* .1-1300 MHz
- \* 100 Program Memories
- \* 11 Tuning steps .5 to 50 kHz
- \* AM/FMN/FMW
- \* Clock Timer 24hr Clock
- \* Internal Nicad Included
- \* Only 1.9 x 4.0 x 1.4, 8.5 oz.

\$539.00 plus shipping

Optional Accessories:  
BC72 Desk Charger  
CP12 12VDC cigg. cable  
Ext. Nicad Pk. 110 to 1000 mah  
BP90 batt. 6AA cell case  
LC57,59,61 carrying case

*World's Smallest Scanner!*

## FAIRMATE HP200



Now extra coverage! BCB and SW. Front end band pass filtering reduces inter-mod.

- \* .5-650 and 800-1300 MHz
- \* 1,000 Memories in 10 banks
- \* Steps 5 to 995 kHz
- \* 40 ch/sec search
- \* Keypad and manual tuning
- \* AM/FMN/FMW
- \* Incl. 4 AA Nicads/AC charger/DC lighter cord/case/belt clip/earphone
- \* 6.7 x 2.6 x 1.4 inches 10 oz.
- \* 1 year warranty

\$449.95 plus shipping

*Optional Desk Charger!*

## STANDARD AX700



Is it a Scanner or a Spectrum Display? It's both, now you can "see" those stations up and down the band that you missed. Add an M75 pre-amp to the AX700, and you have a SDU for your Icom R71A. You can see each SW band while listening.

- \* 50 - 905 MHz coverage
- \* 100 Memory .10 Banks
- \* Steps 10, 12, 5, 20, 25 kHz
- \* 1 & 5 manual steps
- \* See up to 1 MHz Spectrum
- \* Optional HF .1-50 MHz FC7300
- \* 13.8V DC 700 mA

\$799.00 plus shipping

Optional:  
FC7300 HF Converter, .1-50MHz IN,  
100-150 MHz OUT. \$249.95

*SDU Scanner*

## SHINWA SR 001



- \* 25-999.995 MHz
- \* 200 Channels Memories
- \* Steps 5/10/12.5/20/25/50/100 kHz
- \* Scanning speed up to 35 ch/sec.
- \* AM/FMN/FMW modes
- \* Frequency & Mode selected via front panel or remote control
- \* Wireless infrared remote control Incl.
- \* LCD provides multi-color display
- \* Power 13.8V - 1.5A
- \* 7 x 2 x 6 inch. 3 lbs.

Intro. Price \$499.00 plus shipping

Optional RS232 Interface  
Optional 1R Remote

*It's Here At Last!*

## AOR AR3000



The Widest Coverage ever offered in one small package. Plus CW & SSB. A perfect mobile radio to cover everything.

- \* 100 kHz - 2036 MHz
- \* 400 Memories
- \* Programmable tuning steps (50 Hz - 100 kHz)
- \* Scan 20 ch/sec
- \* AM/CW/SSB/FMN/FMW
- \* Uses 12 VDC or 120 VAC Incl.

\$989.00 plus shipping  
Optional RS232, CSC3 \$299.00  
Mobile mount optional \$14.90

*Widest Coverage!*

## DRAKE R8



- \* Freq. Range .1-30 MHz
- \* 100 Program Memories
- \* 5 filters .5, 1.8, 2.3, 4.0, 6.0 kHz
- \* All Mode AM, CW, SSB, RTTY, FM
- \* Pass Band Offset
- \* Synchronous phase lock detection
- \* 100dB Dynamic Range
- \* Truly a High Quality Receiver

\$979.00 plus shipping

Optional VHF converter  
and RS232 Software

*Made In U.S.A.!*



**ELECTRONIC EQUIPMENT BANK**  
323 Mill Street N.E.  
Vienna, VA. 22180


**ORDERS: 800-368-3270**  
**Local Tech: 703-938-3350**  
**FAX: 703-938-6911**

- \* Sorry, no COD's
- \* Free Catalog in U.S.
- \* Battery's not included
- \* Prices subject to change
- \* Prices do not include freight
- \* Returns subject to 15% restock fee



# Shortwave Listening in the Spanish Classroom

By Arthur Edwards

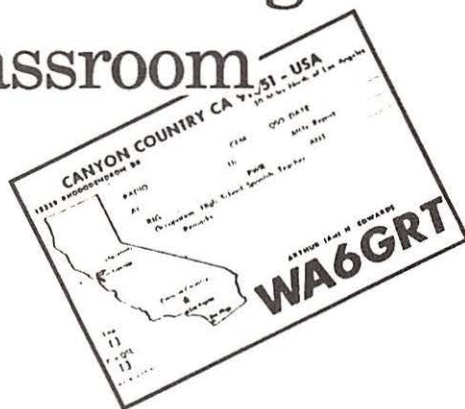

**Monitoring Times** strongly endorses the use of radio in the classroom. We will send one free subscription of *MT* to any class whose teacher writes to us on school letterhead, describing how radio is being used in the class. Be sure to include the name and address for the subscription.

My livelihood for the past 25 years has been teaching all levels of Spanish in high school. I have been using ham radio as part of my teaching experience since 1975. I have had students talk with many countries in the Americas in Spanish and have introduced them to a great deal of global geography.

However, as exciting as this may seem, nothing has had as much impact on the minds of my students as listening to shortwave broadcasting stations.

In the Republic of Panama where I grew up, world band radio was a staple in entertainment. Nightly I would listen to broadcasts from the BBC, Swiss Radio, VOA, HCJB and many others. I came to the United States where I went to college, became a teacher and got married. World band radio listening was put on a shelf.

For Christmas in 1968 my wife bought me a Hallicrafters S120A solid state receiver for \$59.95 at Henry Radio in Los Angeles. My interest in DXing was renewed and I pursued my ham radio ticket in 1974. At that time the

only transceivers available received ham bands only and so my SWL rig was shelved once again.

In 1975 I put up an 80-10 meter trapped vertical on the roof of my classroom and grounded it to the entire steel superstructure of the building. My principal purchased a used Swan 270-B transceiver and I went on the air. The years of radio contacts with all Spanish-speaking countries including the Canary Islands and the ensuing QSL cards inspired a number of students to become hams. Despite these accomplishments, the amount of Spanish actually taught via ham radio was very limited. The occasions when we used the transceiver in the classroom became increasingly rare.

Last year I was able to replace the old transceiver with a Kenwood TS-440S with the capability of general coverage reception.

A ham radio friend, Jack Simpson, KJ6NC, loaned me a copy of *Monitoring Times*. My interest in world broadcasts came to life again. I subscribed to *MT* and read

nearly every issue cover to cover.


When the war in the Persian Gulf broke out I was listening to VOA reports in Spanish and thought of a teaching idea. I recorded the broadcasts depicting the bombing sorties over Baghdad by running a patch cord from the earphone jack to the external microphone input on my little Panasonic handheld cassette recorder.

The next day my two Advanced Placement Spanish classes turned out to be a phenomenal learning success. I played the VOA newscast through a Sony stereo tabletop with room-filling volume. From time to time I paused the tape and would write war-related vocabulary on the chalkboard. I enhanced the lesson by putting up a world map in Spanish and writing names of the region such as Irak, Golfo Persico, Arabia Saudita and others. I gave a test on the vocabulary and followed up with a newscast from the next night.

With this foundation in vocabulary, students were able to listen to subsequent tapings with more of VOA's clear strong signal coming out of Delano, CA, about 250 miles north of me. (See *MT*, April issue)

Students (or for that matter, anyone) who are not radio hobbyists cannot understand nor tolerate interference. So for teaching purposes a powerful signal is required. But a satisfying question was posed to me at the end of a class recently, "Senor Edwards, can you loan me a catalog showing me how I can buy a short-wave radio?"

All *MT* readers know my reply.

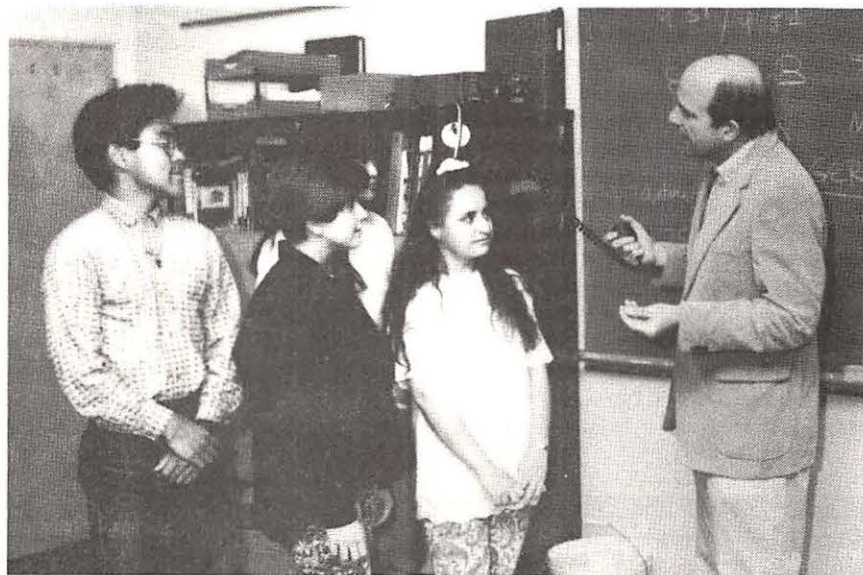

Arthur Edwards shown with a few of his students.

If you have a story of how radio has played a part in your life or the life of your community, send it to *Monitoring Times*. All stories should be true, real life events. Manuscripts should be approximately 1,500 words and must include at least one clear illustration or photograph.



# COMMUNICATIONS ELECTRONICS INC.

**Emergency Operations Center** has expanded to our new two acre facility and World Headquarters. Because of our growth, CEI is now your *one stop source* for emergency response equipment. When you have a command, control or communications need, essential emergency supplies can be rushed to you by CEI. As always, for over twenty two years, we're ready, willing and able to help.

Our RELM two-way radio transceivers were especially created for government agencies. When you need to talk to police, fire, ambulance, or state, federal and international response forces, RELM transceivers may be quickly programmed for up to 48 frequencies. Listed below, are some of our most asked about transceivers. For additional assistance, call CEI at 313-996-8888.

## NEW! RELM® RSP500-A

List price \$465.00/CE price \$319.95/SPECIAL  
**20 Channel • 5 Watt • Handheld Transceiver**  
Frequency range: 148-174 MHz, continuous coverage. Will also work 134-148 MHz, with reduced performance. The RELM RSP500-A is our most popular programmable 5 watt, 20 channel handheld transceiver. You can scan 20 channels at up to 40 channels per second. It includes CTCSS tone and digital coded squelch. Snap on batteries give you plenty of power. Additional features such as time-out timer, busy-channel lockout, cloning, plug-in programming and IBM PC compatibility are standard. It is F.C.C. type accepted for data transmission and D.O.C. approved. We recommend also ordering the BC45 rapid charge 1 1/2 hour desk battery charger for \$99.95, a deluxe leather case LC45 for \$48.95 and an external speaker microphone with clip SM45 for \$59.95. Since this radio is programmed with an external programmer, be sure to also order one PM45 at \$74.95 for your radio system.

## NEW! RELM® UC102/UC202

List price \$128.33/CE price \$79.95/SPECIAL  
CEI understands that all agencies want excellent communications capability, but most departments are strapped for funds. To help, CEI now offers a special package deal on the RELM UC102 one watt transceiver. You get a UC102 handheld transceiver on 154.5700 MHz., flexible antenna, battery charger and battery pack for only \$79.95. If you want even more power, order the RELM UC202 two watt transceiver for \$114.95.

## NEW! RELM® RH256NB-A

List price \$449.95/CE price \$299.95/SPECIAL  
**16 Channel • 25 Watt Transceiver • Priority Time-out timer • Off Hook Priority Channel**  
The RELM RH256NB is the updated version of the popular RELM RH256B sixteen-channel VHF land mobile transceiver. The radio technician maintaining your radio system can store up to 16 frequencies without an external programming tool. All radios come with CTCSS tone and scanning capabilities. This transceiver even has a priority function. Be sure to order one set of programming instructions, part # PI256N for \$10.00 and a service manual, part # SMRH256N for \$24.95 for the RH256NB. A 60 Watt VHF 150-162 MHz. version called the RH606B is available for \$429.95. A UHF 15 watt, 16 channel similar version of this radio called the LMU15B-A is also available and covers 450-482 MHz. for only \$339.95. An external programming unit SPM2 for \$49.95 is needed for programming the LMU15B UHF transceiver.

## NEW! RELM® LMV2548B-A

List price \$423.33/CE price \$289.95/SPECIAL  
**48 Channel • 25 Watt Transceiver • Priority**  
RELM's new LMV2548B gives you up to 48 channels which can be organized into 4 separate scan areas for convenient grouping of channels and improved communications efficiency. With an external programmer, your radio technician can reprogram this radio in minutes with the PM100A programmer for \$99.95 without even opening the transceiver. A similar 16 channel, 60 watt unit called the RMV60B is available for \$489.95. A low band version called the RML60A for 30-43.000 MHz. or the RML60B for 37-50.000 MHz. is also available for \$489.95.

## RELM® Programming Tools

If you are the dealer or radio technician maintaining your own radio system, you **must** order a programming tool to activate various transceivers. The PKIT010 for \$149.95 is designed to program almost all RELM radios by interconnecting between a MS/DOS PC and the radio. The PM100A for \$99.95 is designed to externally program the RMV60B, RML60A, RML60B and LMV2548 radios. The SPM2 for \$49.95 is for the LMV25B and LMU15B transceivers. The RMP1 for \$49.95 is for the RMU45B transceiver. *Programmers must be used with caution and only by qualified personnel because incorrect programming can cause severe interference and disruption to operating communications systems.*

### ★★★ Uniden CB Radios ★★★

The Uniden line of Citizens Band Radio transceivers is designed to give you emergency communications at a reasonable price. Uniden CB radios are so reliable they have a two year limited warranty.

PRO310E-A3 Uniden 40 Ch. Portable/Mobile CB ..... \$72.95  
PRO330E-A3 Uniden 40 Ch. Remote mount CB ..... \$99.95  
GRANT-A3 Uniden 40 channel SSB CB mobile ..... \$152.95  
WASHINGTON-A Uniden 40 ch. SSB CB base ..... \$209.95  
PC122-A3 Uniden 40 channel SSB CB mobile ..... \$113.95  
PC68A-A Uniden 40 channel CB Mobile ..... \$78.95  
PRO510XL-A3 Uniden 40 channel CB Mobile ..... \$34.95  
PRO520XL-A3 Uniden 40 channel CB Mobile ..... \$49.95  
PRO535E-A Uniden 40 channel CB Mobile ..... \$73.95  
PRO535W-A Uniden 40 ch. weather CB Mobile ..... \$78.95  
PRO640E-A3 Uniden 40 ch. SSB CB mobile ..... \$133.95  
PRO810E-A Uniden 40 channel SSB CB Base ..... \$174.95

### ★★★ Uniden Radar Detectors ★★★

Buy the finest Uniden radar detectors from CEI today.  
CARD-A3 Uniden credit card size radar detector ..... \$127.95  
RD3XL-A3 Uniden 3 band radar detector ..... \$124.95  
RD9GTL-A Uniden "Passport" size radar detector ..... \$89.95  
RD9XL-A3 Uniden "micro" size radar detector ..... \$107.95  
RD25-A Uniden visor mount radar detector ..... \$54.95

## Bearcat® 200XLT-A

List price \$509.95/CE price \$239.95/SPECIAL  
**12-Band, 200 Channel • 800 MHz. Handheld Search • Limit • Hold • Priority • Lockout**  
Frequency range: 29-54, 118-174, 406-512, 806-956 MHz. Excludes 823.9875-849.0125 and 868.9875-894.0125 MHz. The Bearcat 200XLT sets a new standard for handheld scanners in performance and dependability. This full featured unit has 200 programmable channels with 10 scanning banks and 12 band coverage. If you want a very similar model without the 800 MHz. band and 100 channels, order the BC 100XLT-A3 for only \$179.95. Includes antenna, carrying case with belt loop, ni-cad battery pack, AC adapter and earphone. Order your scanner now.

## Bearcat® 800XLT-A

List price \$549.95/CE price \$239.95/SPECIAL  
**12-Band, 40 Channel • No-crystal scanner Priority control • Search/Scan • AC/DC Bands: 29-54, 118-174, 406-512, 806-912 MHz. Now...nothing excluded in the 806-912 MHz band.**  
The Uniden 800XLT receives 40 channels in two banks. Scans 15 channels per second. Size 9 1/4" x 4 1/2" x 12 1/2". If you do not need the 800 MHz. band, a similar model called the BC 210XLT-A is available for \$178.95.

## NEW! Uniden® MR8100-A

Call 313-996-8888 for special CEI pricing  
**12-Band, 100 Channel • Surveillance scanner Bands: 29-54, 118-174, 406-512, 806-956 MHz.**  
The Uniden MR8100 surveillance scanner is different from all other scanners. Originally designed for intelligence agencies, fire departments and public safety use, this scanner offers a breakthrough of new and enhanced features. Scan speed is almost 100 channels per second. You get four digit readout past the decimal point. Complete coverage of 800 MHz. band when programmed with a personal computer. Alphanumeric designation of channels, separate speaker, backlit LCD display and more. To activate the many unique features of the Uniden MR8100 a computer interface program is available for \$19.95. Due to manufacturers' territorial restrictions, the MR8100 is not available for direct shipment from CEI to CA, OR, WA, NV, ID or UT.

## NEW! Ranger® RC12950-A3

List price \$549.95/CE price \$259.95/SPECIAL  
**10 Meter Mobile Transceiver • Digital VFO Full Band Coverage • All-Mode Operation Backlit liquid crystal display • Repeater Splits RT • 10 Programmable Memory Positions**  
Frequency Coverage: 28.0000 MHz. to 29.6999 MHz. The Ranger RC12950 Mobile 10 Meter Transceiver has everything you need for amateur radio communications. The RF power control feature in the RC12950 allows you to adjust the RF output power continuously from 1 watt through a full 25 watts output on USB, LSB and CW modes. You get a noise blanker, roger beep, PA mode, mike gain, digital VFO, built-in S/R/F/Mod/SWR meter. Frequency selections may be made from a switch on the microphone or the front panel. The RC12950 gives you AM, FM, USB, LSB or CW operation. For technical info, call Ranger at 619-259-0287.



RELM  
LMV2548B  
Only \$289.95

### OTHER RADIOS AND ACCESSORIES

XC365-A Uniden Ultra Clear Plus Cordless Phone ..... \$89.95  
CT785S-A Uniden speakerphone cordless phone ..... \$109.95  
BC55XLT-A Bearcat 10 channel scanner ..... \$114.95  
AD100-A Plug in wall charger for BC55XLT ..... \$14.95  
PS001-A Cigarette lighter cable for BC55XLT ..... \$14.95  
VC001-A Carrying case for BC55XLT ..... \$14.95  
BC70XLT-A Bearcat 20 channel scanner ..... \$159.95  
BC142XL-A Bearcat 10 ch. 10 band scanner ..... \$84.95  
BC147XL-A Bearcat 16 ch. 10 band scanner ..... \$84.95  
BC172XL-A Bearcat 20 ch. 11 band scanner ..... \$134.95  
BC177XL-A Bearcat 16 ch. 11 band scanner ..... \$134.95  
BC590XLT-A Bearcat 100 ch. 11 band scanner ..... \$194.95  
BC760XLT-A Bearcat 100 ch. 12 band scanner ..... \$254.95  
BC002-A CTCSS tone board for BC590/760XLT ..... \$54.95  
BC003-A Switch assembly for BC590/760XLT ..... \$22.95  
BC855XLT-A Bearcat 50 ch. 12 band scanner ..... \$199.95  
BC1-A Bearcat Information scanner with CB ..... \$129.95  
BC330A-A Bearcat Information scanner ..... \$99.95  
BC560XLT-A Bearcat 16 ch. 10 band scanner ..... \$94.95  
BP205-A Ni-Cad batt. pack for BC200/BC100XLT ..... \$39.95  
TRAVELLER2-A Grundig shortwave receiver ..... \$89.95  
COSMOPOLIT-A Grundig shortwave receiver ..... \$199.95  
SATELLIT500-A Grundig shortwave receiver ..... \$679.95  
SATELLIT650 Grundig shortwave receiver ..... \$949.95  
ATS803A-A Sangean shortwave receiver ..... \$159.95  
74102-A Midland emergency weather receiver ..... \$39.95  
77116-A Midland CB with VHF weather & antenna ..... \$66.95  
77118-A Midland CB mobile with VHF weather ..... \$62.95  
77913-A Midland CB portable with VHF weather ..... \$79.95  
76300-A Midland CB base station ..... \$92.95  
FBE-A Frequency Directory for Eastern U.S.A. .... \$14.95  
FBW-A Frequency Directory for Western U.S.A. .... \$14.95  
RFD1-A MI, IL, IN, KY, OH, WI Frequency Directory ..... \$14.95  
RFD2-A CT, ME, MA, NH, RI, VT Directory ..... \$14.95  
RFD3-A DE, CO, MD, NJ, NY, PA, VA, WV Dir. .... \$14.95  
RFD4-A AL, AR, FL, GA, LA, MS, NC, PR, SC, TN, VI ..... \$14.95  
RFD5-A AK, ID, IA, MN, MT, NE, ND, OR, SD, WA, WY ..... \$14.95  
RFD6-A CA, NV, UT, AZ, HI, GU Freq. Directory ..... \$14.95  
RFD7-A CO, KS, MO, NM, OK, TX Freq. Directory ..... \$14.95  
PWB-A Passport to World Band Radio ..... \$16.95  
ASD-A Airplane Scanner Directory ..... \$14.95  
TSG-G7 "Top Secret" Registry of U.S. Govt. Freq. .... \$16.95  
TTC-A Tune in on telephone calls ..... \$14.95  
CBH-A Big CB Handbook/AM/FM/Freeband ..... \$14.95  
TIC-A Techniques for Intercepting Communications ..... \$14.95  
RRF-A Railroad frequency directory ..... \$14.95  
EEC-A Embassy & Espionage Communications ..... \$14.95  
SMH-A2 Scanner Modification Handbook, Vol. 2 ..... \$18.95  
LIN-A Latest Intelligence by James E. Tunnell ..... \$16.95  
A60-A Magnet mount mobile scanner antenna ..... \$34.95  
A70-A Base station scanner antenna ..... \$34.95  
USAMM-A Mag mount VHF ant. w/ 12' cable ..... \$39.95  
USAK-A 3/4" hole mount VHF ant. w/ 17' cable ..... \$34.95  
Add \$4.00 shipping for all accessories ordered at the same time.  
Add \$15.00 shipping per radio and \$4.00 per antenna.

### BUY WITH CONFIDENCE

Michigan residents please add 4% sales tax or supply your tax I.D. number. Written purchase orders are accepted from approved government agencies and most well rated firms at a 10% surcharge for net 10 billing. All sales are subject to availability, acceptance and verification. Prices, terms and specifications are subject to change without notice. All prices are in U.S. dollars. Out of stock items will be placed on backorder automatically or equivalent product substituted unless CEI is instructed differently. A \$5.00 additional handling fee will be charged for all orders with a merchandise total under \$50.00. Shipments are F.O.B. CEI warehouse in Ann Arbor, Michigan. No COD's. Not responsible for typographical errors.

**Mail orders to:** Communications Electronics, Inc.  
Box 1045, Ann Arbor, Michigan 48106 U.S.A. Add \$15.00 per radio for U.P.S. ground shipping and handling in the continental U.S.A. For Canada, Puerto Rico, Hawaii, Alaska, or APO/FPO delivery, shipping charges are two times continental U.S. rates. If you have a Discover, Visa, American Express or MasterCard, you may call and place a credit card order. 5% surcharge for billing to American Express. For credit card order, call toll-free in the U.S. Dial 800-USA-SCAN. For information call 313-996-8888. FAX anytime, dial 313-663-8888. Order today.

Scanner Distribution Center™ and CEI logos are trademarks of Communications Electronics Inc.  
Sale dates 3/15/91 - 10/31/91 AD #032591-A  
Copyright © 1991 Communications Electronics Inc.


**For more information call  
1-313-996-8888**

**Communications Electronics Inc.  
Emergency Operations Center**

P.O. Box 1045 □ Ann Arbor, Michigan 48106-1045 U.S.A.  
For orders call 313-996-8888 or FAX 313-663-8888



# Larry Van Horn

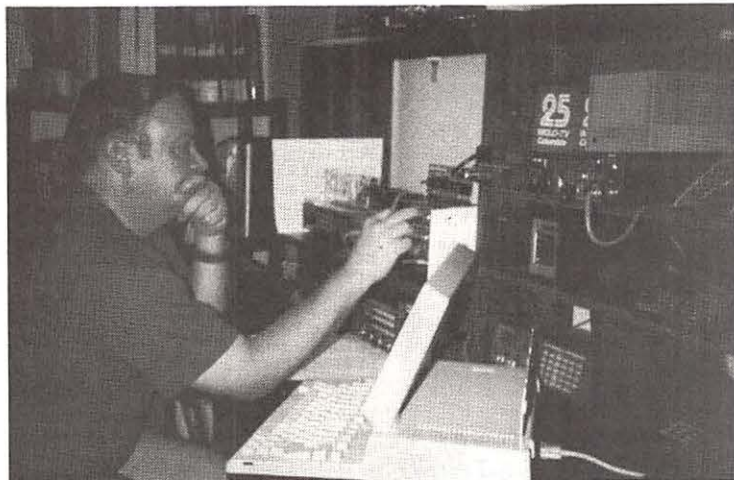

Larry Van Horn vividly remembers the first time he heard the snap and crackle of shortwave radio. It was 1965 in San Antonio, and Larry says that was the beginning of a hobby he has carried with him around the world.

AM, FM, TV, VHF/UHF, utilities—even satellite listening: You name it and Larry has either monitored it or QSLed it—or perhaps both. Chances are he will proudly show you his volumes of QSL albums to prove it.

From his home in New Orleans, Larry granted *MT* an in-depth and candid interview to discuss what he knows best—radio.

We found his radio room filled with shelves of equipment—enough to hear anything from zero to 1.4 GHz. Awards and photos from his naval career line the walls. An extensive collection of books and computers complement the shack. His wife, Gayle, a DXer as well, epitomizes the understanding wife; no converted closets for this guy.

We asked Larry the question which always arouses curiosity in readers. "How did your radio hobby begin?"

VH: Twenty-five years ago, growing up in San Antonio, I received my first shortwave radio for Christmas. It was a Hallicrafters S120 with an analog dial. I DXed the heck out of it for several years before I enlisted in the Navy.

So your hobby began with shortwave listening?

VH: No, I had started mediumwave DXing the year before on a small five-tube G.E. clock radio my parents gave me. What drove me off the wall was hearing KGNB on 1420 kHz in New Braunfels, Texas. Despite it being less than 50 miles away,

I thought I'd found the mother lode. Soon I discovered that radio had a day/night relation. From there I spent many a school night tuning the dials and collecting QSLs.

Do you still dabble on the shortwave bands?

VH: Not as a DXer much, but as a listener. I catch at least one BBC newscast a day. I think they are an excellent news source. During the Persian Gulf War, I followed Voice of America more regularly. They stayed consistently on top of developments, and released state department reports. From there, I was able to pass several reports along to the local media.

You mentioned enlisting in the Navy. When was that, and how important has radio been for you in the military?

VH: I enlisted in the Navy in January of 1971, and I'm still on active duty. Radio has been most important to me during the times I was stationed overseas. Having a shortwave radio on board the ship or wherever I was deployed helped me maintain news from home. During a nine-month sea cruise it's easy to lose touch with the news events stateside. Mail from home and a radio have been a big boost while seeing the world.

We asked Larry how important the Armed Forces Radio and Television Service (AFRTS) was to him when he was overseas, and whether he felt today's personnel are missing something since it left the airways. He didn't hesitate:

VH: Definitely. Years ago on my first ship, the USS Josephus Daniels, I was

an AFRTS broadcaster/disc jockey. At that time, AFRTS as well as the Voice of America and BBC were our lifelines for news from home. Overseas personnel probably are missing its touch as an additional news source. I always enjoyed their baseball/football games.

On the wall we noticed a plaque with the amateur radio callsign N5FPW. Van Horn confirmed he has been an amateur radio operator since 1974, when he was stationed in Pearl Harbor, Hawaii.

He added, "My most unusual contact would have to be with Owen Garrett, W5LFL, on board the Space Shuttle. I still cherish the QSL card and the memory of the contact."

We hardly needed to ask such a seasoned listener as Van Horn if he listens to much VHF/UHF traffic on scanners. Predictably, he answered, "You bet." He went on to add:

VH: I'm not really a police or fire call buff, but I do enjoy prowling the federal and aircraft bands. That goes back to the early '80s when Bob Grove and I were members of the RCMA (Radio Communications Monitoring Association). Since then I've kept frequency logs. Usually when on a deployment I bring an extra scanner to hear our Navy fighter pilots kick butt during an exercise. It always draws a crowd during the dogfights.

## Getting Started

How about a "first scanner" for the beginner, and a reference book? Any recommendations?

VH: I would say get the best scanner you can afford. For the absolute beginner — pick up a *Police Call* at your local Radio Shack Store. There are some drawbacks to it, but the information is good for an overall view.

We wanted to sit in with Van Horn on a DXing session, so we asked him for the first step; what kinds of preparations did he make before settling down to work? That elicited a laugh:

VH: Well, the first thing I do is get some dog biscuits for the family dog who is always under foot at radio time. Actually, he's under foot all the time.

Next I set up my laptop computer. It mostly depends on my DX mood. If there is a hot spot in the world I check those frequencies first, but usually I begin with a general tuning of the bands checking frequency by frequency.

I take it computers play an important role in your hobby?



VH: Absolutely. By adding a laptop I have been able to expand on an extensive database of HF frequencies. Not only am I accumulating information to use in preparing my column or other future projects, but I also use it as my own personal logbook.

The laptop has also enabled me to use a modem to share radio news with other users around the world. It keeps track of totals, AM work, and reception reports. The computers have become a valuable piece of radio equipment in our radio room.

I'm using it now, with the AEA PK232 to demodulate and display facsimile, teletype, Morse code and several other digital modes.

## Signals from Space

Although Larry Van Horn has been *MT*'s utility expert since 1988, he first began writing for the magazine in 1983, editing a column on satellite communications. He is also author of the book, *Satellite Communications*, now out of print. We asked him how he got started DXing satellites.

VH: That started in Hawaii shortly after I became an amateur radio operator. I was fascinated with the thought of communicating with other hams via amateur satellites.

Well, actually, the interest began as a kid listening to Soviet cosmonauts in space on HF radio, and Soviet satellites. The American Gemini 8 mission also comes to mind immediately. That was another late school night for me, but I heard them.

How can the new satellite DXer begin? Are we talking special equipment or antennas?

VH: Actually, anyone with a scanner can hear a satellite. Punch in 150.0 MHz into your scanner and I guarantee within two to three hours you will hear a Russian navigation satellite overhead. There are amateur satellites up there that you can hear on a handy talkie. We've also had Russian cosmonauts right below the two-meter band, and using a simple indoor antenna, I've heard Russian voices in the middle of the night.

In fact, right after the MIR space station was launched in the early '80s, I was trying to hear their spacecraft. The scanner was set on 143.825 MHz. Some time after midnight and after a punch awake from my wife, Gayle, she whispered, "There's someone in the house and they're not speaking English." Actually,

it was the cosmonauts overhead, and I still like to kid her about it.

As former columnist of *MT*'s "Signals From Space," has your interest in space or satellites waned?

VH: Not at all. I still follow it with a passion. NASA continues to send me weekly bulletins on every satellite that is launched. I continue to keep such data on a database. While others may collect coins or stamps I accumulate satellite data.

I think people have a natural interest in space, and would like to hear what is going on "up there." It's like the DXer who wants to hear that rare station. It's a natural intrigue. Up to our most recent launch, readers continue to ask me about hearing shuttle communications. Through the years, we've continued to publish that information in *Monitoring Times* and print the most up to date information on the Shuttle and the Soviets.

## Listening to Utilities

As resident "utilities" expert, Van Horn is aware it's a term which can leave the beginner wondering. We asked Larry to give us a definition of "utilities."

VH: Probably the best way to explain is not so much what they are, but what they aren't. A utility station is one that is nonbroadcast in nature, nonamateur and is non-CB. If you exclude all of the ham bands, the CB 11 meters and the international shortwave broadcasters, anything that is left will be in a utility band.

My inclination, naturally, leans toward DXing the military stations. The digital modes of RTTY, AMTOR, SITOR and FAX interest me, and I normally monitor ship and aeronautical traffic.

What is the very best beginner's tip you can give for utility listening?

VH: I would say there are three main things a beginner should do. First, tune around—a lot—and learn where the bands are for the aeronautical and marine bands. Second is to keep good records—particularly a logbook, so you can go back and check past loggings. A chart wouldn't hurt, either, of what you expect to hear in the bands.

Your tape recorder is the third equally important item. This will help you learn the utility band communications lingo and their procedures.

## THERE IS NO EXCUSE FOR PAYING TOO MUCH

Free shipping on all prepaid orders.

### ALL NEW '91 CATALOG ! Only \$2

SCANNER MODS FOR PRO2004, 2005, 2006, PRO34, BEARCAT 200, 205, 760, 950  
Call For Pricing !

Midland VHF Portable Weather Radio  
AUTOMATIC ALERT, List \$79 SALE \$32  
New ! Ranger RCI1000 VHF Mini-HT  
2 CH., 1 WATT List \$197 SALE \$150  
New ! Regency INF 10 Mobile Scanner  
W/TURBO SCAN II List \$209 SALE \$119  
Bearcat BC170 II Band Base Scanner  
W/AIRCRAFT, List \$189 SALE \$109  
UNIDEN BEARCAT BC200 XLT Scanner  
12 BANDS, FREE MODS, . SALE \$255  
COLT CPI1000 Cordless Phone  
3 YEAR WARR. List \$99 SALE \$50  
New ! AE3 VOX Transmitter Kit  
49 MHz CRYSTAL CONTROLLED \$45

INTERCEPT INC.  
6014 OAK HILL DRIVE  
FLOWERY BRANCH, GA 30542  
PHONE (404) 967-9757

### HOW TO HEAR MORE ACTION:

Use these three innovative new products.

- The **FM WIRELESS SPEAKER RELAY** lets you listen to the superior reception of your base SW receiver or scanner through any FM radio up to 1/10 mile away! Auto shut-off. Complete kit includes attractive case: \$28.95. 75% assembled version: \$37.95.
- The **ACTION TAPE CONTROLLER** connects your scanner to your cassette recorder, activating it only while your scanner is picking up some action. Plugs into scanner's speaker jack. Great for condensing an entire night's scanning into minutes or for catching rare action on FBI, DEA, SWAT, Customs and other such frequencies. Assembled/tested: \$29.95.
- The **WIRE STRETCHER** is an indoor SW active antenna amplifier module that will make a 5 to 10 foot long wire or telescoping whip pick up signals like a 50 to 100 foot long wire antenna! Complete kit (less case): \$19.95. Assembled/tested (less case): \$28.95. Case w/switch: \$12.95.

All units come with a limited warranty. Add \$4.00 shipping per order. For more detailed info on all of our products, send a 29 cent stamp.

**WORLD COM TECHNOLOGY**

P.O. Box 3364  
Ft. Pierce, FL 34948 (407) 466-4640

## SYNTHESIZED SIGNAL GENERATOR



.1 Hertz to 1 megahertz with distortion in the audio range below 1%. Small compact size 1x3x4 inches. Sample units now available at \$97.50 each. Major credit cards accepted. Call now!

### AIE CORPORATION

PO BOX 70, BATESBURG, SC 29006  
(803) 532-9256, FAX (803) 532-9258



How important are propagation conditions when utility listening?

VH: They're extremely important. Understanding times and station locations can also assist you in ruling out certain areas of the world. By knowing the propagation conditions, you are able to rule out certain stations automatically, because of their daylight/darkness patterns. Read as much as you can on propagation, and then read it again.

Are there set schedules for utility listening, as in shortwave broadcast stations?

VH: To a certain extent, yes and no. For instance, the Coast Guard broadcasts routine weather forecasts and notices to mariners. Other stations have their maritime marker, as in a CW identification, at set hours. After that comes the intrigue of the utilities, for there are no schedules.

Does one need to install an additional antenna to hear the utility bands?

VH: Any basic longwire shortwave antenna can be used as long as it is not specifically tuned for shortwave broadcast frequency ranges.

For utility reference books, what would you recommend?

VH: I have shelves full and although each one is fantastic I've yet to find one single source, a *WRTH* so to speak, presently on the market. If I am DXing RTTY, FAX or nonmilitary, then usually Joerg Klingenfuss's book, *Guide to Utility Stations*, is open. The book is listed by frequency.

For general tuning I use the *Confidential Frequency List* and it is also listed by frequency.

For specific items such as Air Force frequencies, SAC frequencies or the FEMA frequencies, Bob Grove's *Short-wave Frequency* book is on the desk. Each one is good in its own right.

## Over the Years

Knowing that utility monitors encounter the same kind of real-time, real-life drama as scanner listeners often overhear, we asked Larry to recall the most dramatic incident he had ever monitored. It came to mind immediately.

VH: The biggest drama and the one I was most involved in emotionally and physically was the space shuttle Challenger explosion. That drama unfolded for me by monitoring the shuttle frequencies and

visually seeing the explosion while living in Florida.

At the time, I had to put my grief aside and use my monitoring capabilities to put out a story for *Monitoring Times*. For two weeks, I monitored the rescue and recovery missions off the Cape.

Courtesy of radio I also followed the Falklands War, Grenada, Panama, and naturally, the Persian Gulf War. Following the developments during the latter gave me a different perspective from the televised reports.

As the Utility World columnist, how large is your monthly contributors' mail and how does it influence each month's topic of interest?

VH: (Laughs) Well, I know after the mailman leaves our house his mail load is much lighter. Since the very beginning, I have been blessed with some dynamite contributors.

I owe the column's basic approach to our former editor, Larry Miller. Through his input we were able to balance the column for both the beginner and expert hobbyist. Because of this, I've received exceptional letters from both fields. The reader has influenced the column a great deal since day one.

You and your wife, Gayle, are one of the few married DX teams in the hobby. Do both of you work the utility and shortwave bands together?

VH: (Another laugh) That's why we have several receivers, so we can do just that. There are times, especially during a national or world crisis when we are able to trade information and frequencies. With both of us working the bands, we are able to provide quite a bit of information to the local and national TV and radio.

It's nice, too, because she understands the significance of a rare catch just heard, or a QSL from a one watt station. It also helps when I suggest some new equipment. Together, we work very hard to keep the hobby alive for our son, and it seems to be working.

You started DXing in 1965; After 25 years in the hobby, what has kept your interest in radio?

VH: The sheer variety of what you can hear comes to mind first, for you never know what news stories may break as you are listening. As a youngster, I was there at the radio as the Russian troops invaded the streets of Czechoslovakia. I heard the troops and the tanks live and it made a profound impact on me.

News of the marine compound bombing in Beirut came via the radio. I've heard rescues at sea and heart-wrenching phone patches from MARS traffic. Obviously, as a listener you are hearing news in the making.

Let's move to the future. As one of our senior columnists and feature writers, you have seen *MT* emerge from a newspaper tabloid to the present magazine format. What do you think the future holds for *Monitoring Times*?

VH: Well, I think the Groves and the Van Horns will be gray and wrinkled and still yelling "one more month" when deadline is met. But seriously, I think the magazine is damn good. I've watched it grow from an eight page freebie. It was obvious to me early on that it was on the right track, but it just needed the right mix. I would envision in the future that the magazine will continue with the style and timeliness that it now has.

Tell us about your personal plans. What do you hope to accomplish as a columnist and writer in the future, and as a DXer, where do you see yourself in the next 25 years?

VH: As a columnist for *Monitoring Times*, I hope the column continues to evolve into whatever the readers expect it to be. As a writer, I'd like to continue feature articles for *Monitoring Times*, as well as write a number of books.

As to DXing, it depends on what I can get by with in new equipment. If you look around our radio room, you see three radios to transmit on, and the others are devoted to listening. Actually, I'd like to add a R7000 to the shack, as well as a multimode decoder system such as the M7000 to back up the PK232.

In addition to adding equipment, in the next 25 years, I hope to keep up with the technology explosion we see now in the radio business. Each and every day I DX, something new comes in or is discovered, especially in the utilities mode. I think it is very important to stay on that cutting edge of new technology. Primarily, though, I plan to use that technology to write an abundance of books.

After 25 years, it's obvious Larry knows his way around the radio hobby and loves all it has to offer. Chances are his next 25 years will be equally satisfying and productive.

More books? Feature articles for *Monitoring Times*? Somehow that doesn't surprise us.







# THE JAPAN RADIO CO. **NRD-535**

## THE NEXT GENERATION IN HIGH-PERFORMANCE HF RECEIVERS

Once again JRC breaks new ground in shortwave receiver design. The new NRD-535 has all the features SWLs and amateurs have been waiting for. General coverage from 0.1 to 30 MHz in AM, USB, LSB, CW, RTTY, FAX and Narrow FM modes. Advanced ECSS operation for phase-lock AM reception. Variable bandwidth control (BWC). Tuning accuracy to 1 Hz possible with direct digital synthesis. 200 memory channels with scan and sweep operation. Triple Superheterodyne receiving

system. Superb sensitivity, selectivity and image rejection. Dual-width noise blanker eliminates impulse noise. Squelch, RF Gain, Attenuator, AGC and Tone controls. Optional RTTY demodulator available. 24 hour clock/timer. Easy to read vacuum fluorescent display with digital S-meter. AC and DC operation. Plus the most comprehensive computer interface found on any radio to date. Call or write today for a full color brochure, price list and dealer information.



*Japan Radio Co., Ltd.*

MAIN OFFICE: Akasaka Twin Tower (Main), Akasaka 2-chome, Minato-ku, Tokyo 107, JAPAN  
Tel.: (03) 584-8836 Telex: 242-5420 JRCTOK J

IN U.S.A.: 430 Park Avenue (2nd Floor), New York, NY 10022  
Tel.: (212) 355-1180 FAX: (212) 319-5227 Telex: 961114 JAPAN RADIO NYK

CIRCLE 123 ON READER SERVICE CARD



# Shortwave Broadcasting

Glenn Hauser

Box 1684 - MT

Enid, OK 73702

**AFGHANISTAN** (non—people keep asking what this means: item about a country but not actually transmitted from it; mainly clandestines or relay sites) Voice of the Mojahed of Afghanistan (Pashto: "Da d Afghanistan d Mojahed ghag radio dah"), hostile to Kabul government, announces 0100-0200 and 1415-1515 UTC on 518 and 3.2 MHz, but heard on 3250 or 3270 kHz (BBC Monitoring)

**ANGOLA** Radio Nacional program at 2030 on 4780.2, Cuando Cubango active again? (Henrik Klemetz, Sweden, *SW Bulletin*) RNA on 7151.6 parallel 7245 at 2200-2230 (Klemetz, *Play-DX*) Active frequencies as of mid-June: 3354.7, 3377.0v, 4780.0, 7245.0, 9534.9, 9720.3, 11954.8 (Vashek Korinek, RSA, *Play-DX*)

(non) A Voz da Resistencia do Galo Negro is heard at 0500 on 9700, around 1800-2000 on 7100 and 7205 (ex-7130). Also on 4880 from 2100 to 2307 or 2322 with Portuguese news at 2300 (*ibid.*)

**BAHRAIN** On 6010 from fade-in 2045 unidentified station in English, news at 2100, sign-off at 2108 saying next news would be at 6 a.m. (Bob Padula, Australia, *World of Radio*) Identified two weeks later as Radio Bahrain, new country on SWBC!, heard in English from 2000 to 2103; registered with IFRB for 60 kW at 0300-2100 on 6010 from Abu Hayan (Henrik Klemetz, Radio Netherlands Media Network, and *SW Bulletin*)

**BRAZIL** 4815, Radio Difusora Londrina has English and Spanish religious programs at 0200-0230, asks for reports to C.P. 1847, 86101 Londrina, Parana (Henrik Klemetz, RNMN) Confirmed on 4814.9 at 0159 English ID and program, 0213 Spanish (Hans Johnson, MD)

5965.0, new station Radio Transamerica, Santa Maria, 1000-1035, poor (Nobuyoshi Aoi and Shyichi Sasaki, Japan, *Radio Nuevo Mundo*)

11910, Radio Cancao Nova, new frequency announced //4825, 6105, very good at 1000 (Daniel Camporini, Argentina)

**CANADA** CBC has canceled *Media File* after August, de-facto successor to RCI's *SWL Digest* (Loren Cox, *Review of International Broadcasting*)

**CANARY ISLANDS** (non) RNE has not had SWBC from transmitters here for a long time, but you can hear a program daily at 2200-2300 on 11815, cabled from the Canaries to Madrid; invites letters to Apartado 1233, Santa Cruz de Tenerife, and draws lots every day for a small prize to a listener (Henrik Klemetz, Sweden, *SWB*)

**COLOMBIA** 5535.39 varying to 5535.48, Ecos Celestiales, at 0100 (Juan Carlos Codina, © Peru, *Play-DX*) QSL letter from Arnulfo Villada Arango, Director General and Owner, Apartado Aereo 6447, Medellin (Yimber H. Gaviria, Popayan, Colombia, *Play-DX*) Not 8447 5873.51 to 5873.55, Radio El Sol, San Jeronimo, apparently fourth harmonic, sign-off varying widely as early as 2351, as late as 0230 (Codina, *ibid.*)

6170, La Voz de la Selva. Assassilants who escaped into the jungle shot to death Jose Libardo Mendez and Carlos Rodriguez, who worked for the Caracol affiliate. Mendez's reporter wife, Judith Aristizabal, was injured in the attack (Florida Times Union via John Bellovich, *SPEEDX*)

**COMOROS** Reactivated Radio Comoros on 3330.0 heard from sign-on around 0300 (Terry Krueger, FL, *Play-DX*) SW had been off since 1987; also on 7260 at 0900-1500, then 3330 (BBCM) Measured on 3330.8 while Rwanda was on 3330.22 (EuGene —, Antwerp, *BRT Radio World*)

**COSTA RICA** Radio for Peace International's third-quarter schedule shows official frequency usage is: 21465 USB at 1800-0330, 15030 at 1800-1200, 13630 at 1800-0600, 7375 USB at 0000-1200. But we've often noted both 15030 and 13630 past 1200. This implies four

transmitters in use at 0000-0330, confirmed at least once (via John Carson, OK)

Jamming by idling RTTY has been noted in parallel on 15030 and 13630 at times, so it must be deliberate; any ideas as to source? (James Latham, *RFPI Mailbag*)

**CROATIA** (non) Croatian Radio, Zagreb, via WHRI announced it's one hour later on Sundays (gh) Confirmed UTC Monday at 0100 on 7315 (Joe Hanlon, PA) And on 9495 that day.

**CYPRUS** BFBS can still be heard, 2200 past 0050 on 15675 USB (Tim Hendel, FL) 15670 USB feeder from England at 0029 (Paul Routenburg, Ont., *Fine Tuning*)

**CHILE** 6088.5, Radio Esperanza, choral and other music, better after 0600 when 6085 station closed (Hans Johnson, MD)

**ECUADOR** 4212.06, new station announcing 4220, Radio Tucuben, Universidad Catolica, at 0030 to sign-off 0158 (Juan Carlos Codina, © Peru, *Play-DX*) Couldn't get name, but place is Ona, at 0027-0302 (Rich McVicar, HCJB *DX Partyline*) 4870, Radio Rio Amazonas definitely closed down after 30 years, but equipment might be sold to Radio Variedades, Puyo, now only on MW 1120 (Rich McFicar, HCJB *DXPL*)

Added to HCJB's schedule Sundays at 0330 is *Sports Spectrum*, with Chuck Swirsky of WGN. *Happiness Is*, Tuesdays during *Studio Nine*, is about HCJB's early and later history Sept. 17 and 24. *Ham Radio Today*, Wednesdays in September: 4, angle of radiation, HF mobile antennas, keeping a log. 11, LW characteristics, HF mobile antennas part 2, headphones. 18, MW characteristics, HF mobile antennas part 3, elimination of novice accent. 25, SW characteristics, HF mobile antennas part 4, repairs (HCJB)

**ESTONIA** Tallinn's weekly English broadcast, Mondays at 2030-2100 (presumably one hour later from October) has added 9560 to 5925 and 1035 (BBCM) But 9560 not heard the following Monday (Eugene, *BRT Radio World*)

**ETHIOPIA** Voice of the Broad Masses of Eritrea now announces it broadcasts from Asmara, on 7020, 3940, 7490, no longer on 14338 and 10018. Of the four pro-EPRDF radios, only Voice of Tigray Revolution continues, announcing its location as Mekele, 0400-5000 and 1600-1700 on 6940, 7820, and still too in former ranges 7460-7485, 9310-9345 (BBCM)

**GALAPAGOS** La Voz de Galapagos ceased SW 4810 in 1989 because transmitter was damaged and they could not afford to repair it; remains active on MW 1320. Other station, Radio Santa Cruz, lost its MW 1410 but uses FM 92.2; both belong to Franciscan Mission (J.C. Moreno, *DSWCI SW News*)

**GEORGIA** Radio Georgia, Tbilisi, has started English: 1700-1730 on 12070, repeated at 2000-2030 on 11760, but modulation is so muffled it is virtually unreadable (Andy Sennitt, Holland, *SW Echo* via Kirk Baxter) Maybe also at 0400 or 0500 on 12050, unconfirmed (BBCM via RNMN)

**GUAM** KSDA will resume English at 1000-1100 when they acquire a new transmitter; this slot on 13720 recently taken over by Russian (*Radio Magazine*)

High Adventure Ministries, KHBN, after numerous delays in acquiring a transmitter site, has decided to build elsewhere—Rota, Palau or northwestern Australia (Bill Matthews, Radio Korea *SW Feedback*)

**GUATEMALA** Leftist URNG guerrillas threatened to burn Raido Kekchi earlier this year when they took over Las Casas for half a day, but instead burned a power installation on the outskirts which put



# Shortwave Broadcasting

the station off for several weeks. Baptist missionaries evacuated, and native Baptists moved all activities to daytime (*Commission* magazine via Ken MacHarg, HCJB DX Partyline) Heard on 4844.5 at 0105-0305 in June (Dieter Lippmann, Germany, DSWCI SW News)

**HUNGARY** Radio Budapest has two DX shows, one on Tuesday and Friday, another on Wednesday and Saturday; no longer running the *DX Club* (Joe Hanlon, PA) Around 2130 and next UTC day 0230. One of these accused 13-meter broadcasters of putting signals in the ham band below 21450—Riyadh, Moscow, Spain, BBC.

**INDIA** Sites for frequencies used in AIR GOS English transmissions: Aligarh on 15050, 17387, 15335, 15120, 11860, 9950 at 1830, 7412, 9910 at 2045, 15135, 11715; Bombay on 15360. Bangalore on 11620, 15265, 11745. Khampur on 11760, 21735, 17895, 11935, 9950 at 2045. Kingsway on 9910 at 2315 (*WRTH Downlink*)

**INDONESIA** 2341.5, Radio Elkira, Radio Swasta Non Comercial, pirate in Jakarta, 1730-1800. 2436, Radio Satria Bhayangkara, another one, at 1715 ID. 2466, RPKD Klungkung, Bali, 1000-1600. 2654.5, Radio Arista, another Jakarta pirate announces 2658, at 1210. 3240, RKPDT2, Lumajang, Jawa Timur, 0930 drama. 3412.6, RPKD2, Bima, ex-3422, 1000-1500 (Aboc Nawan Thalip, Batang, Indonesia, *OzDX*)

QSL from RKPDT2 Bima, 3422, says changed to 3125, 500 watts, needs books on how to transmit with tubes or transistors to cut costs instead of unstable VFO. 3654, RPKD2 Buol Tolitoli, verified saying 200 watts (Kirk Allen, OK, *Fine Tuning*)

RRI Jakarta, not announced as Voice of Indonesia, very weak on 11784 in English 2000-2025 fadeout, also German 1800-1845 (Ernie Behr, Ont.)

**IRAN** Iranian TV reported the new site at Sirjan is progressing; first phase will have ten 500 kW German SW transmitters on an 1800-hectare site; second phase adds six more. Will have 48 antennas, one rotatable, and 15-megawatt power station. (BBCM)

(non) Voice of the Mojahed, believed from Iraq, has increased to 1530-1830 on 7130, 6150, 4737, 4240, frequencies vary to avoid jamming (BBCM)

**IRAQ** Voice of Mojahed, thought to be from here, but where did they get all the transmitters? From sign-on 0125 until fade around 0300 on 8490, 7140, 6150, 5635, 4750, 4245, inaudible on 3560; all jammed and vary + 10 kHz from day to day; again from 1530 on 3560, 4245, 4750, 5635, 6160, 7150, 8490. Farsi ID is pronounced Sar-da-ye Moja-heyd!! (Asantha Sirimanne, Sri Lanka, *UADX*) Programs on 6540 are not in parallel (*ibid.*)

Voice of Iraqi Opposition at 2133 was on 15608, Iraqi-style jammer on 15610, and a new type of jammer on 15602 and 9570 (Hans Johnson, MD, *World of Radio*) Heard 1400-1800 on 17960 and 15605, both jammed (BBCM)

**IRELAND** After lots of music tests, Radio Fax started science and technology news on Mondays, 24 hours on 6205, 1 kW; 12255, 200 watts (RNMN)

**ISRAEL** Drastic cuts in external services were postponed until June 30, and again until August 31 while effectiveness was evaluated (IBA via BDXC *Communication*) Kol Israel still needs all the listener support they can get; write P O Box 1082, 91010 Jerusalem, or fax +972 2 223282 (William Westenhover, PQ, *SPEEDX*)

**KASHMIR** (non?) First known QSL from Sada-i-Huryat-i-Kashmir, 5000 kHz, included a 15-page "Kashmir Problem in the Context of History." Says Voice of Independent Kashmir uses the address P O Box 12, Muzaffarabad, Azad Kashmir, Pakistan, only to ensure safe correspondence from abroad. Letters then take several days to reach them via special carriers who scale the mountains on foot (Bjorn Fransson, Sweden, *SW Bulletin*)

**KURDISTAN** (non?) Voice of the People of Kurdistan, on 4000 at 1600, starting with music at 1650 (BBCM) You mean 1550?

(non) Voice of Iraqi Kurdistan, 0400-0500 and 1600-1700 on 5950 varying to 5500 (BBCM) Later at 0400-0500 on 6151 conflicting with Yemen; 1600-1700 on 5831 (BBCM)

**KUWAIT** Radio Kuwait chief of technical section says SW frequencies will be back within 8 months from July, full operation as before in two years (Radio Japan *DX Corner*)

**LAOS?** Radio Louang Prabang, 7010 at 0050-0129, folk music, s/off with national anthem, very poor with ute QRM (Claudio R. Moraes, Antonio Ribeiro da Motta, and Rogildo Fontenelle Aragao, Brazil) Contrary to BBCM, none of the provincial stations have been on SW for the last 2-1/2 years (Sarath Weerakoon, Sri Lanka, *WDXC Contact*) unID on 7009.8 at 0040 with sub-continental music, Pakistan? (Paul Routenburg, Ont., *FT*) 7008.6v, Islamabad HS good at 1400-1807, QRMing hams like me (Victor Goonetilleke, Sri Lanka, and Vashek Korinke, RSA, DSWCI *SW News*) New station at Oudom Xay on 4736.7v, slowly drifting up, 2245-2300 s/off (Korinek, *ibid.*)

**LEBANON** King of Hope testing new 25 kW transmitter around 2000 on 11530; old one on 6280 (RNMN)

**LIBERIA** VOA is still off from here; hope to resume, unknown when. Very difficult to get in to see condition of site. One group found heavy looting, only the antennas, towers and feedlines workable. Transmitters need total rebuilding, or new ones. But hope to bring up a downsized site in near future. Also looking at other sites in Africa, and working with other broadcasters to get spare time on their transmitters (Bill Whitacre, VOA, RNMN)

**LITHUANIA** In late July, the Radio Vilnius broadcast at 2300 had been replaced by Moscow in Russian on 15485; only heard on 11790 but co-channel Beijing (Andrew Reid, Ont., RNMN)

Raidocentras, commercial station, made its first SWBC via Radio Vilnius 9710, Saturday June 29 at 0600-0700 in English and Esperanto, and said would continue the last Saturday of each month; reports to P O Box 1792, Vilnius (BBCM)

**MYANMAR** (non?) Voice of the People of Wa State, clandestine, continues active 1130-1330 on 5100, but how come never reported from North America, even the west? (Gerry Dexter, *Clandestine Confidential*, via NASWA *Journal*)

**NAMIBIA** NBC has combined the English and National Services for 24 hours on AM, FM, SW, for a "new look," including *Good Morning Namibia*, Saturdays 0400-0600 covering major events and developments (*Times of Namibia* via BBCM)

**NETHERLANDS** Radio Tower (pirate) broadcasts biweekly for North America, Saturday and Sunday 0030-0330 or 0000-0300 on 15050; many reports already received to PB 19074, NL-3501 DB Utrecht (*FRS Goes DX* via BDXC) Stunned by response to this 100-watt broadcast, but then vastly reduced power due to transmitter problems, indefinitely (Gregg Allinson, ACE)

**NETHERLANDS ANTILLES** TWR is upgrading, time to renew and replace equipment. Will get two 100 kW SW from the HCJB plant in Elkhart, IN, phase out old 250, and refurbish old 50. Also studying possibility of starting a satellite service from Bonaire in a year or two, via PanAmSat, news and gospel-program feeds to Latin American stations instead of unreliable mail; unsold time available to secular organizations (Jim Munger, TWR's new Miami office via Jeff White, RNMN)

**NEW ZEALAND** RNZI resumes Japanese service Aug. 31, Sats. 1100-1200 on 9700, repeated same time Sundays (RNZI *Mailbox*) Will





# Shortwave Broadcasting

run for 12 weeks through Nov. 17, with one weekend's program repeated following week for a total of 4 times each. Continuation depends on listener response, reports preferably in English with one IRC (Japan BCL Federation via Radio Japan *DX Corner*) Remember, 15120 supposed to replace 13785 at 1800-2200 Sept. 1.

**PAKISTAN** Raido Pakistan on 9369.2 from 0030 Koran, 0100 news (Hans Johnson, MD) See also LAOS

**PARAGUAY** Radio Nacional, 9735, has changed format again—evening broadcast has only boring talks and classical music, no more Paraguayan folk music, a very bad move. Listeners should protest (Ernie Behr, Ont., *Radio-Enlace*)

**POLAND** Radio Polonia's DX Program is about 5 minutes after start: Tue. 2230, 2305; Wed. 1630, 2000 (Tom Sundstrom, NJ, *WRTH Downlink*)

**RUSSIA** Radio Station Vedo, new commercial outlet is on 13710 at 1558-1900; address Ul. Mira 9, 400066 Volgograd (Olle Alm, Sweden, *SWB*) Seems weekdays only (Bjorn Fransson and Finn Krone, *SWB*) Heard only on 13710 but also announces 11760, and 0330-0530 daily on 7125, 5915 (BBCM)

Radio Berjozovo, Khanty-Mansiysk Okrug, relays local program Sunday 0415-0500 on 5070. Radio Cheboksary (between Gorkiy and Kazan) can be heard at 0400-0430 on 9875 (Aleksi Osipov, *Exotic DX News* via *Play-DX*)

**RWANDA** (non) New clandestine of the RPF is Radio Muhabura, "leading the way" also the name of a northern mountain, 0400-0600 daily on 49 meterband, but the Rwandan embassy in Kampala disputes its existence (*The New Vision*, Uganda, via KNA Kenya via BBCM)

**SERBIA** (non) New station from Osijek, Croatia for the Serbs, is *Srpski Radio Slavonije, Baranje i Zapadnog Srem*, daily 1200-1300 on 40 metres (Tanjug via BBCM)

**SINGAPORE** SBS frequencies are slipping: 11927v at 2200-0100 and 1000-1600, not regular, maybe weekend only? (Asantha Sirimanna, Battaramulla, Sri Lanka, *UADX*) 5008 instead of 5010 in English at 1230 (K. Krishna Rao, India, *DX Post* via Bill Matthews, Radio Korea)

**SOMALILAND NORTH** Radio Somaliland IDs on 7118v at 1630 in Arabic, good here, also mentions Radio Hargeisa (Asantha Sirimanna, Sri Lanka, *UADX*)

**SPAIN** RNE started a 24-hour world service in Spanish earlier than expected, at the expense of other languages, such as English at 0000-0200 on 11880, left with 9630 only. Published schedule shows the repeat at 0455-0552, but we heard it starting at 0500 (*W.O.R.*)

Other English remains: 1900-2000 9875, 11790, 15295 (sic—15395?), and to Africa opening at 1904 on 15375; 2100-2200 on 9875 (Edwin Southwell, England) See also CANARY ISLANDS

**SUDAN** National Unity Radio, Khartoum, retimed to 1500-1700 on 9535, partly in English (BBCM)

**SWEDEN** After six months of frustration with management over a new organization plan, head of English service Sarah Roxstrom resigned; staff supports her, but not allowed to strike, so several called in sick, causing programming except for news, to suffer (George Wood, CompuServe via *DX Ontario*)

**TUNISIA** Arabic services on 11523 at 0728-0735, //17500 15450 (Achim Brueckner, Germany, *DSWC SW News*) 11545.9v at 1630 //12005 (Wolfgang Bueschel, *ibid.*) A month later found on new 11575 at 0630-0700 ex-11530, //17500 and 15450; 11530 had just replaced 11550 (Bob Padula, Melbourne, Australia)

**TURKEY** VOT announces 9445 is used for English to Europe at 2000-2050, and 2200-2250 as well as to North America at 2200 and

0300-0350; Mideast at 2200 on 9665; Southeast Asia at 2200 and 0300 on 17880 (Edwin Southwell, England) Have they combined two transmitters on 9445, or lost a transmitter?

**USA** WWCR announced its second transmitter would operate: 1100-1500 on 12160, 1500-2200 on 17525, 2200-0100 on 12160, 0100-1100 on 7520, with shows formerly on 7520 moved to new frequency but old transmitter on 7435. Now has construction permit for a third transmitter.

High-speed CW numbers on 15687 have interfered with *World of Radio*, Friday around 2140-2150 on 15690 (Tom Sundstrom, *SW Echo* via Kirk Baxter; Diane Mauer, WI.; John Norfolk, OK)

Randi Steele remained estranged, but some who left Radio New York International resumed, at least for a while—Big Steve Cole, first and third Sundays (UTC Mondays) at 0100 on 7520, then 7435; followed on the third by Johnny Lightning. RNI announced it would carry *Radio Caroline* twice each month, one of the times being first Sunday at 0300-0330 Monday (Norfolk)

Radio Miami International via WRNO abolished awful 6185 in favor of 7395 after 0300, but did not meet its mid-July target for expanding to 7 hours weekdays from 2100. Fax number is 305-477-3639 (*W.O.R.*)

WLW, Cincinnati, verified its 26450 outlet as 75 watts NBFM into a vertical half-wave dipole on the studio roof, with pre-delay audio or mix-minus audio, interruptible for cuing feedback (Jean-Luc Fradet, France, *BDXC*)



WWV has had to reschedule the first daily broadcast of solar-flux readings from 1818 to 2118 UTC since the measurements are made in Penticton instead of Ottawa (Tom Sundstrom, *WRTH Downlink*)

**VIETNAM** Hanoi TV announced that two inactive 50 kW SW transmitters at A Nuc had been removed, renovated and put back at the "CK2 radio station." One of these may be source of the new 7113 kHz for northeast and central highlands, from fade-in around 2200 until 0600, parallel usual domestic outlets 12035, 10060, 6450, 5920, 5020, 4895 (BBCM) Measured on 5919.46 and 10058.63 at 1047; external service at 1030 on 15009.25 (Chuck Bolland, FL, *World of Radio*)

**YEMEN** Republic of Yemen Radio has started daily English service on 5970, 7190 at 1600-1630, with news, talk, 5 and 10-minute features; ID is Yemen Program Two, English Service from Aden (BBCM) Sana'a reactivated on 9780.3, excellent at 0315 Koran, 0333 news in Arabic (Hans Johnson, MD, *W.O.R.*)

**YUGOSLAVIA** Radio Yugoslavia has been renamed Radio Federal Yugoslavia, including English to North America 1200-1230 on 17740 (William Cooper, PA, Radio Japan *DX Corner*) See also CROATIA and SERBIA (nons)

**ZAIRE** Radio Kisangani active on 11494.9 from before 0500 to 0700, news in French at 0600; may sign on at 0400, not yet checked in afternoon, weak in South Africa (Vashek Korinek via Dario Monferini, *SW Bulletin*) But in Monferini's *Play-DX* the frequency is given as 11454.9—which is correct? Korinek says it is not a harmonic.

Radio Lubumbashi, tentative on new 9450 in French until 2257 three months ago (David Sharp, *DXSF* via *Play-DX*)

**ZAMBIA** Heard on 9504.6 from 1540 Fish Eagle, 1555 anthem, 1600 news in English; separable from RFE 9505, but Beijing is too strong after 1600 (Yoshiaki Hayashi, Radio Japan *DX Corner*)

**ZIMBABWE** is inactive on SW (N. Takahashi, *ibid.*)

See last month's column for Glenn Hauser's *World of Radio* times on WWCR, WRNO, RFPI, some of which may still be in effect; much more SWBC and other information is yours by subscribing to *DX Listening Digest* and/or *Review of International Broadcasting*, in USA \$25 for 10 issues of either, \$47 for both, from Glenn Hauser, Box 1684-MT, Enid, OK 73702.



# Broadcast Loggings

*Thanks to our contributors -- Have you sent in YOUR logs?  
Send to Gayle Van Horn, c/o Monitoring Times.  
English broadcast unless otherwise noted.*

## 0000 UTC on 11950

CUBA: Radio Havana. Interval signal and sign-on into newscast. Comments on Ireland and program "Kaleidoscope." Additional programming heard on 11950 kHz at 0235 UTC, and 11760 kHz at 0423 UTC. (John S. Carson, Norman, OK) Spanish programming noted on 15105 kHz at 0630 UTC. (Jerry Witham, Keauau, HI)

## 0040 UTC on 11710

ARGENTINA: RAE. Spanish. Weak Argentine instrumentals and news topics on Buenos Aires. (Sam Wright, Biloxi, MS) Radio Continental heard on 9115 kHz USB from 0227-0235 UTC. (Jeff Leach, Omaha, NE)

## 0050 UTC on 11910

HUNGARY: Radio Budapest. Folk music into station sign-off at 0056 UTC and interval signal. (Carson, OK) Parallel frequencies audible at this hour were 9835/15160 and 6110 kHz. (Wright, MS)

## 0114 UTC on 3395

ECUADOR: Radio Zaracay. Spanish. Excessive static and flutter. News story on Guayaquil to station ID. "Radiofonica Populares" audible on 5011.6 kHz at 0916 UTC. Great Andean music to announcer's ID. (Grace, MA) (Wright, MS)

## 0134 UTC on 15260

ASCENSION ISLANDS: BBC relay. Opera music program and commentary, audible on parallel frequency 6005 kHz. (Carson, OK) BBC relay also heard on 15390 at 2230, and 15400 kHz at 2120 UTC. (Van Horn, LA)

## 0135 UTC on 11645

GREECE: Voice of Greece. Greek/English. News in progress at tune-in to 0140 UTC. Greek music, to report on excavation of an ancient Macedonian site. Greek ID and English programming to 0157 UTC. (Gasque, SC) (Chudy, HI)

## 0153 UTC on 4865

COLOMBIA: La Voz del Cinaruco. Spanish. Cola commercials and station IDs. (Leach, NE) Colombia's La Voz de Centauros audible on 5955 kHz at 1000 UTC. News, music and "Centauros" ID with fair reception (David A. Gasque, Orangeburg, SC)

## 0153 UTC on 6115.8

COLOMBIA: La Voz del Llano. Spanish. Numerous IDs and announcer chat. (Leach, NE) Additional monitoring on 6115.85 kHz at 0927 UTC. Music, IDs and station address quote. (Grace, MA)

## 0200 UTC on 9570

ROMANIA: Radio Romania Int'l. World news and closing topics on USSR, Albania and Romania. Spanish service noted on 11940 kHz at 0300 sign-on. (Wright, MS) Additional monitoring on 11940 kHz at 0415 UTC. Commentary and press conference included. (Carson, OK)

## 0215 UTC on 11705

SWEDEN: Radio Sweden. Report on the whaling industry in Sweden. "A Slice Of Life" show and Swedish weather report/forecast. English service closing at 0228 UTC. (Gasque, SC)

## 0225 UTC on 4799.8

GUATEMALA: Radio Buenas Nuevas. Spanish. ID in progress at tune-in. Station sign-off at 0230 UTC. Radio Chortis very weak on 3380 kHz at 0243 UTC. Latin tunes, ID, and sign-off at 0257 UTC. (Jeff Leach, Omaha, NE)

## 0246 UTC on 4911.2

PERU: Radio Twantinsuyo. Spanish. Soccer game commentary and several IDs. (Leach, NE) Peru's Radio Atlantida audible on 4790 kHz. Station ID at 0943 UTC and Quecha-style music from 0946-1000. (Gasque, SC)

## 0300 UTC on 9965

CLANDESTINE: Radio Caiman. Spanish. Talk and unflattering editorial on Cuba and Fidel Castro. Additional clandestine, La Voz del CID, heard on 9940 kHz at 2310. (Carson, OK)

## 0330 UTC on 9725

COSTA RICA: Adventist World Radio. Spanish/English. Religious sermon to gospel vocals. (Wright, MS) Audible to sign-off ID as "Radio Mundial Adventista" at 0456 UTC. (Leach, NE)

## 0409 UTC on 7475

TUNISIA: RTV-Tunisienne. Arabic. Brief Arabic prayers and Koran recitations. Station sign-off at 0500 UTC. (Leach, NE) Additional Arabic programming heard on 11550 kHz at 0600. (Rod Pearson, St. Augustine, FL)

## 0454 UTC on 5020

NIGER: LV du Sahel. French. Station sign-on with music and drums. Announcer's brief talk and recitations. Good signal for continued French and African music. (Frank Hilton, Charleston, SC)

## 0457 UTC on 4850

CAMEROON: CRTV-Yaounde. French/English. Newscast to include local interest topics. Station ID at 0504 UTC. Additional monitoring at 2350 UTC with French programming. Sign-off with multilingual IDs at 0000 UTC. (David Marshall, Sidney, OH)

## 0530 UTC on 3270

NAMIBIA: Radio Southwest Africa. Weak signal for English news and gold market price

quotes. Audible on parallel frequency 3290 kHz. (Chudy, HI)

## 0555 UTC on 14917.7

KIRIBATI: Radio Kiribati. Station sign-on until 0612 UTC, followed by BBC news relay. South Pacific news update closing with island instrumentals. Sunday religious hymns from 0630-0700 UTC, with signal peaking best at 0630. (Brian Schaft, Berea, OH)

## 0643 UTC on 5030

TONGA: Radio Tonga (tentative). Tongan. Very weak signal for lady announcer's text. No ID format recognized. (Jason Chudy, Alea, HI)

## 0650 UTC on 7260

VANUATU: Radio Vanuatu. French/Bislama. Good signal for clear station ID and local interest announcements. (Chudy, HI)

## 0650 UTC on 7275

LIBERIA: ELBC. Station sign-on with national anthem. Station ID as "This is ELBC, the radio service of the Liberian Broadcasting System." Gospel instrumental and vocals to newscast at 0700 UTC. Religious text following the news. (Eric Stutler, Hot Springs, AR)

## 0820 UTC on 9645

BRAZIL: Radio Bandeirantes. Portuguese. Crazy morning show for tune-in at 0820 UTC. Two male announcers trading off rapid-fire commentary amid taped background barnyard sounds. Station ID at 0830 UTC. Additional Brazilian, Radio Inconfidencia heard on 6010 kHz at 2332-2350 UTC. Brief radio play and ID jingles. (Gasque, SC)

## 0935 UTC on 11375

CHINA: Central Peoples Broadcasting Service. Chinese. Traditional Chinese music, with very brief title announcements until 0956 UTC. Open carrier to interval signal at 0958 UTC. (Witham, HI)

## 0957 UTC on 12015

MONGOLIA: Radio Ulan Bator. Asian dialect. Weak and fluttery signal. Male/female announcers present several instrumental tunes and a tentative ID. (Grace, MA) English program noted at 1430 UTC on 13780 kHz USB. ID/frequency quote and Asian music. (Wright, MS)

## 1036 UTC on 6185.02

MEXICO: Radio Educacion. Spanish. Mexican music to 1042 UTC. Station ID into traditional Mexican music program. (Grace, MA)

## 1335 UTC on 21550

FINLAND: Radio Finland. News program and "Northern Report" show. Audible on parallel frequencies 15400/15185 kHz. (Carson, OK)

## 1343 UTC on 11710

CLANDESTINE: Radio SPLA. Arabic/English. Talk and news about Sudan. English sign-off at 1357 with time/frequency quote. (Carson, OK)

## 1415 UTC on 5025

BHUTAN: Bhutan Broadcasting Service. Regional and world news to 1424 UTC. Announcements of local interest including an auction, property tax deadlines and the sign-up date for a marathon. Station ID and the Cat Stevens rendition of "Hard-Headed Woman" at 1430. (Witham, HI)

## 1445 UTC on 3231.8

INDONESIA: Radio Republik Bukittinggi-Sumatera. Indonesian. Easy-listening music played without interruption until station ID and newscast at 1500 UTC. Poor copy of signal. Witham, HI)

## 1525 UTC on 3912

SOUTH KOREA: Clandestine Voice of the People. Korean. Rapid-fire delivery between male/female announcers. Station ID under band music at 1530 UTC. (Witham, HI)

## 1610 UTC on 6211

EUROPEAN PIRATE: European Christian Radio. Station ID and address quote: P.O. Box 500, A234 Brunn, Austria. Chime signal and program broadcast in Turkish. (Hite, Germany)

## 1705 UTC on 7010

ETHIOPIA: Clandestine The Voice of Ethiopia on the Path of Democracy. Statements and discourse by several announcers in unknown language. Brief music from film soundtrack and an interview with a very distraught lady. (Witham, HI)

## 1735 UTC on 7140

JAPAN: Radio Japan. Discussion on electrical generators and program "Japan Diary" at 1745 UTC. (Witham, HI) Audible on 11865 kHz from 1900-1930 UTC. (Louis Rossetti, Austin, TX)

## 1927 UTC on 4934

KENYA: Kenya Broadcasting Corp. Music from Phil Collins song "Another Day In Paradise" dedicated to the homeless families throughout the world. Station ID and chat. (Hites, Germany)

## 2200 UTC on 5047

TOGO: RTV Togolaise. French. African-style music in progress at tune-in. Announcers talk, phone-call and station ID. Continued similar programming audible to 2310 UTC. (Hilton, SC)

## 2230 UTC on 7190

EQUATORIAL GUINEA: Radio Africa. Fair/good reception for "Voice of Faith" religious program in progress at tune-in. Gospel music for closing program ID. QSL address quote for Equatorial Guinea and California. National anthem to sign-off at 2307 UTC. (Nicholas Adams, Newark, NJ) This program also audible to sign-off at 2130 UTC on 7305.5 kHz. (Pearson, FL)

## 2345 UTC on 9760

ALBANIA: Radio Tirana. Gium national economic report and sports news. (Bob Fraser, Cohasset, MA) Additional monitoring on 9580 kHz at 0232 UTC. More economic news on Italy/Albania, Albanian folk music and sign-off at 0257 UTC. (Carson, OK)



# Utility World

Larry Van Horn

c/o MT, P.O. Box 98  
Brasstown, NC 28902



## Eye of the Tiger

Now you are probably saying, "Has the Chief been smoking too much sea weed lately"? Nope, I haven't even touched a ship in the last year. This has to do with a letter I received from Mr. A.D. Chiquoine in Clinton, NY.

He asked, as many have before him, "I have recently decided to specialize in maritime monitoring; how can I learn to do it as well as Hank Holbrook and others? Does he spend all day at the radio? How does he keep track of so many different frequencies and poll them for activity? What kind of equipment/antennas does he use, etc?"

Well, A.D., there is not a lot of magic here. You have to get the "Eye of the Tiger" just like in the Rocky movie. You have to attack the frequencies you are interested in listening to. This goes for just about any specialty in the Utility World bands.

The time may come when you say to yourself, "Boy, would I like to specialize in woodpecker monitoring."

Now you have made a commitment; The next step is to start a research phase. Find everything you can on the woodpecker signals. Read past articles that have been done on the subject (That'll teach you not to throw out your old copies of MT!). Make a list of frequencies that the station has been heard on recently or in the past. Make sure you list them all.

You can also use previous Utility World columns and check out the logging section. That is an excellent place to find new and different logs since I guarantee you'll find new and interesting stations and frequencies in that section each month.

Now that you have found all your woodpecker frequencies, it is time to monitor those frequencies using a logical approach and monitoring scheme. This is usually the "make or break" point in your commitment. Most folks never master this phase, and may decide that, oh well, variety is the spice of life after all.

If you have a receiver that can scan memory channels, that will be an enormous help. Load the frequencies into memory, and continuously scan those frequencies for activity. Eventually you will get an idea of the most active channels to watch.

If your receiver only has a VFO (that means variable frequency oscillator) and you can only watch one channel at a time, then do that. You are going to have to resist the temptation to change the channel after five minutes of static. Don't touch that dial. Sit on one channel for a while and see what happens. Make yourself a chart set up by frequency and time. Monitor different frequencies over the course of a 24 hour period. This will really give you a sample of what is happening on your frequency selections.

You can use your chart to determine activity and propagation. (Yep, that ugly word that Uncle Skip used a couple of months back.) Look in the logs and articles you researched for calling and primary channels. These are usually the busiest and can get you started finding new channels to listen to.

Your method of frequency selection is important. Use some good old common sense. Use some basic propagation techniques. Go back and read Uncle Skip's column on basic propagation in the July issue. That even goes for some of us old timers as well. I did. You will never stop learning in this radio business. When you do, you are probably dead.

As I said, frequency selection is important. A basic rule I follow is: during the day 10 MHz and above, at night use 10 MHz and below. Does this mean that if you listen below 10 MHz during the day you won't hear

something? No, you probably will but it won't be as active as the frequencies above 10 MHz. In addition, during the summer months, static below 10 MHz can downright give you a headache (plus discourage you from coming back). You get more storms during daylight hours than at night unless you are in a hurricane (then things are sort of relative anyway).

Keep in mind that frequencies from different parts of the world to your receiver follow the sun around the globe. Look for stations from the east in the morning hours, your continent (north and south) in the afternoon and west in the evening. This is a general rule only, folks. Propagation is not an exacting science and there still is a lot we humans have to learn about how HF signals propagate around the world.

You need to plan your listening carefully. Don't expect to hear Truk or Kure Island Navy MARS stations on 6 MHz at high noon at your central United States location. Even if you see such a logging, note the location of the person submitting the log. It is probably nowhere close to where your receiver and antenna currently reside.

Next, keep a log of activity. This is important when you want to impress your DX (DX stands for distance) friends: "Yes sir, I have logged 450 ships from 55 flags (countries) throughout the world." I bet you that will start one heck of a conversation at your next office party. It also helps to know if that ship you are monitoring is new or not.

Once you have heard a station, you can send a reception report to them in the hopes that they will return in kind and verify your report with a card or letter. This is called QSL collecting. There are some who have done it for years and have gotten quite good at it. Hank Holbrook collects ships and his totals are in the thousands. Andy Gordon collects Navy ship QSLs; his totals are in the hundreds.

This can be an interesting phase of the hobby and maybe if there is enough interest (stand by, Mr. Mailman) I will cover this QSL subject one month. There are also several books which cover this subject. One you should have on your shelf is, *DXing with the Experts* by Gerry Dexter. It should be available from several of our advertisers such as DX Radio Supply and Universal Radio.

Remember, persistence is the key to success when you decide to specialize. Regular listening is extremely important. Don't expect that you will sit down on your first session and log every ship that is on the high seas that very day. To quote a friend, "It ain't gonna happen." You will need some of Rocky's "Eye of the Tiger" to succeed in Utility Band specialization.

Now go get 'em, tiger.

## United States to Scrap Airborne Command Post in Europe

As you are aware, East/West relations have really thawed out over the last several years. In the Utility World we have seen evidence of that in many different ways. One more example recently surfaced when the U.S. Air Force announced plans to withdraw its airborne command post from Europe.

USAFE (that stands for U.S. Air Force in Europe) had four EC-135H aircraft known as the "Silk Purse," stationed at RAF Mildenhall in the United Kingdom. These aircraft were modified Stratotankers with specialized communications equipment.

The Silk Purse aircraft have operated continuously since 1962, when it was established at Chateauroux Air Base in France at the height of the Cold War.



"These planes are not on round-the-clock missions, but are always on ground alert, available to provide a flying command post in the event of war in Europe. They are deemed unnecessary in light of the collapse of the Soviet-led Warsaw Pact military alliance," said Department of Defense spokesman Pete Williams.

"This is another sign of the times," Williams said.

In July 1990, the U.S. Strategic Air Command announced it was ending its "Looking Glass" round-the-clock flights. These U.S. based planes would issue battle orders in a nuclear war that killed or disabled the president and other command authorities. They now fly at random and unannounced intervals.

In a similar vein, the United States Navy announced in May that it had ended its round-the-clock flights of its version of the flying command post, the TACAMO (Take Charge and Move Out) aircraft. TACAMO planes would be used by the President to relay launch orders to U.S. nuclear-armed submarines in the event of a nuclear war. The planes now fly occasionally.

Most of the Silk Purse group (68 military personnel and one civilian) will leave the base at Mildenhall by September. The group will be deactivated "no later than December of 1991," according to Williams.

The 10th Airborne Command and Control Squadron based at Mildenhall will be disbanded. This is the unit that provides flight and communications crews to the Silk Purse mission. A Pentagon statement said the Air Force also was cutting 489 jobs from the 513th Air Command and Control Wing at Mildenhall, but it was not disbanding the wing.

Many thanks to David R. Alpert for forwarding this information to us. It looks like things will continue to change worldwide for military ute buffs as the Cold War continues to thaw.

## New Contributor from South Africa

If you check out this month's loggings, you might notice a new name amongst the multitude, that of Robert Hall in Cape Town, South Africa. Robert is the RTTY and Data Transmission Controller for his local DX club which is now over 150 members strong and publishes a monthly magazine which includes a full section under the Utility World heading (Hummm, this seems to be catching on).

Robert's equipment includes two ICOM R-71E's connected up and tuned for diversity reception using a range of vertically and horizontally polarized antennas. These are connected to a Universal M7000 and a Seikosha 1200A1 printer. Robert believes he has the only M7000 in Southern Africa. You might just be right, Robert.

"My special interest at the moment are French military and naval communications using mainly ARQ-E3, ARQ-E and ARQ-M2 teletype modes, Russian marine communications using mainly RTTY at 170/50 and general marine communications using CW, RTTY and SITOR-A/B modes, plus USB, of course. I am having some trouble monitoring VFT signals," Roberts said. "I have read all the manuals, but I have only been able to tune in one (VOA Greenville)."

If anybody has any suggestions on VFT monitoring and frequencies, drop me a line so I can publish it for Robert and everybody that reads Ute World. Thanks for the letter and RTTY logo, Robert.

## Callsigns the Key to Understanding Mil Comms

It has been my experience that military communications are more enjoyable when you know the identity of the callsign you are hearing. It just adds that special flavor to mil comms like nothing else does. Well, Gayle will be taking care of that need shortly with the publication of a new book on nothing but callsigns. You should be seeing that very soon.

Tom Lemaire in Rutherford, NJ, has sent some interesting calls he has recently monitored. Tom also commented on one of Bill Battles' logs

in the April issue of this column concerning MAC+letters callsigns used during Desert Storm.

I believe that the letters in the MAC aircraft callsigns have to do with the mission number of a particular flight. Some of the flights do incorporate the mission number into the callsigns and some don't. Tom did some extensive monitoring of MAC flights during Desert Storm and his research seems to bear out those conclusions.

He has also include a list of tactical identifiers that he has monitored, so here is Tom's list to whet your appetite until Gayle's callsign book hits the street.

Yankee Ops	Ft. Meade, MD
Cradle	Eglin AFB, FL
Crawfish Base	NAS New Orleans, LA
Card Call	907 TAG Rickenbacher ANGB, Columbus, OH
Casino Royale	Westover AFB,
Mud Bug Control	Barksdale AFB, LA
Strike Eagle Control	Plattsburg AFB, NY
Otis	Cherry Point MCAS, NC
Trident Base	VP-62, Brunswick, ME
Derby Ops	Kentucky ANG
Waxy Ops	Scott AFB, IL
Bear Den	NAS Glenview, IL, Marine Corps
Titan	Base Ops, Cherry Point
Spud Control	CP-Loring AFB, ME
Orion Control	Wright Patterson AFB
Gun Runner	Robbins AFB, GA
Happy Control	O'Hare Intl, IL
Woodpecker	VP-49, NAS Jacksonville, FL
Agsarben Control	Eglin AFB, FL
Fogpatch	Castle AFB, CA
Coal Box	NAS Brunswick, NE
Rook	Langley AFB, VA
Gun Fighter	NAS Norfolk, VA
Pelican	NAS Jacksonville, FL
Carbon Copy	Kelly AFB, TX
Rhody	Quonset Point, RI
Raider	MCAS El Toro, CA
Spartan Control	NG Mather AFB, CA
Carbonate	914 TAG CP Niagara Falls, NY

Thanks for the list, Tom; check in with us often.

## Miscellaneous Stuff

I want to remind everybody that the Top 10 contest expires this month. Be sure to get your entries in to me no later than September 15. I will compile the list and bring it to the Convention.

That brings me to another reminder. Convention time is only one month away. If you haven't made your plans to go now, time is almost up. Be sure to sign up for the Utility forums, but hurry. Last year we had a packed house and indications are the same will occur this year. Don't be left out of the ute show; once the magic number is reached, no additional folks can get in the forums.

Finally, Ralph Smith would like to know if anyone has a good list of the U.S. Coast Guard designator like 3-echo-4, etc. Let's start putting together a list of these like we did the U.S. Air Force designator. If you have some Coast Guard designators, drop me a line at the address in the masthead. I will print them as they are sent to us. Thanks, Ralph, for the letter and your comments. Now it is time to see what you have been hearing this month in the Utility World...73's de The Chief.



## Utility Loggings

### Abbreviations used in this column

Aero	Aeronautical	NCS	Net Control Station
AF	Air Force	NDB	Non-directional Beacon
AFB	Air Force Base	Net	Network
AM	Amplitude Modulation	NORAD	North American Air Defense
APN	Nowosti News Agency - USSR		Command
ARQ-E3	Single channel ARQ mode	Ops	Operations
BCD	Binary Coded Decimal	QRM	Interference
CANFORCE	Canadian Military Forces	QSY	Change frequency
CAP	USAF Civil Air Patrol	RAF	Royal Air Force - England
CNA	Central News Agency	RTTY	Radioteletype
Comms	Communications	RY	Typical test tape using characters R and Y
CQ	General call for any station	SAC	Strategic Air Command (USAF)
CV	Multi-purpose aircraft carrier (US Navy designation)	SFC	Surface
CW	Morse Code	SITOR-A	Simplex teleprinting mode A (ARQ)
DE	"From"; common CW marker	Sync	Synchronize
EC-135	SAC Command Aircraft	TAC	Tactical
EAM	Emergency Action Message	TACAMO	Take Charge and Move Out Aircraft (USN)
FAX	Facsimile	TANJUG	Yugoslavian News Agency
GCCS	Global Command Control System	TASS	Soviet News Agency
ID	Identification	Unid	Unidentified
IRNA	Iranian News Agency	USAF	United States Air Force
KC-10	SAC Tanker Aircraft	USB	Upper Sideband
KCNA	Korean Central News Agency	USCG	United States Coast Guard
kHz	Kilohertz	USN	United States Navy
LSB	Lower sideband	USS	United States Ship
MAC	Military Airlift Command (USAF)	UTC	Universal Time Coordinated
MARS	Military Affiliate Radio System	V marker	CW frequency marker (VVV)
Meteo	Meteorology	VOLMET	Aviation Weather stations
MFA	Ministry of Foreign Affairs		
MHz	Megahertz		
Muni	Municipal		

All frequencies in kilohertz (kHz), all times in UTC. All voice transmissions are English unless otherwise noted.

- 11.05 Omega navigation station with pulse transmission at 0036. (Brian Webb-Thousand Oaks, CA)
- 11.33 Omega navigation station with pulse transmission at 0500. (Webb-CA)
- 11.80 Omega navigation station with pulse transmission at 1555. (Webb-CA)
- 13.10 Omega navigation station with pulse transmission at 0148. (Webb-CA)
- 13.60 Omega navigation station with pulse transmission at 1915. (Webb-CA)
- 60.00 WWVB-Fort Collins, Co at 0533 with BCD time ticks. (Webb-CA)
- 124.0 CKN-Esquimalt, BC CANFORCE station with V CW marker at 1243. (Webb-CA)
- 276.0 PEZ-CW NDB (Bill-San Antonio, TX) Bill, according to my reference, I show this to be the NDB at Pleasanton, TX at Muni on 275 kHz-The Chief.
- 330.0 HMA-CW NDB (Bill-TX) This one is on 275 kHz and it is Hondo Muni, TX-The Chief.
- 360.0 HHH-CW NDB (Bill-TX) This one is on 359 kHz and it is Devine Muni, TX-The Chief.
- 2670.0 USCG Miami Group broke into a scheduled navigation/weather broadcast from another Coast Guard asking about a raft sighting at 0336 in USB. (Neal Perdue-Madison, AL)
- 2738.0 Possible fishing vessels using the 'F' word frequently. Newfoundland accents at 1850 in USB. (Ted Hay-Watford, Ontario, Canada) I wonder when someone DOT/FCC is going to do something about these guys. The problem is starting to get out of hand-The Chief.
- 3370.0 German female 4-digit number station in AM at 1837. (Tom Hites-APO,NY)
- 3550.0 YMA20-Ankara Meteo, Turkey with RTTY with RYs and calls then Turkish airfield weather forecast at 2113. (J.M. Dunnett-Wellington, UK)
- 4028.0 Spanish female 5-digit number station at 0500 in AM. (Skip Harwood-Beale AFB, CA)
- 4373.0 X7E working Giant Killer and H8G reporting aircraft safe on deck in USB at 0247. (Russ Hill-Oak Park, MI)
- 4466.0 Pico 45 (net control) with several other Pico number stations on net with check-ins, traffic, etc. Net closed down at 0800 for night. (Fernandez-MA)
- 4764.7 CCS-Chilean Naval Radio, Santiago with RTTY weather and traffic in Spanish at 0255. (Robert Hall-Cape Town, South Africa)

- 4780.0 Groups of CW characters repeated over and over at 0525. (Don Roth-Shelton, CT) This is a FEMA station WGY-912 in Mount Weather, VA-The Chief
- 5058.0 FDG-French Air Force, Bordeaux with CW V marker at 0120. (Hardester-NC)
- 5097.5 "NAWS DE CFH 3394 4152.6 6230.6 8337.5 12453.5 16642 22186 kHz AR". Who is this? (Roth-CT) Canadian Forces station in Halifax, NS-The Chief
- 5223.0 USCG San Juan working O81 with position reports in USB at 0338. (Bill Frantz-Thomasville, GA)
- 5286.6 Unid 5-letter group CW station at 0926. (Leonard Szalony, NC6W-Fontana, CA)
- 5696.0 NOM-USCG Air Station, Miami working aircraft 2112 with air emergency in USB at 2335. (Perdue-AL)
- 5812.0 Spanish female 4-digit number station at 0300 in AM parallel with 10665 and with 11533 at 0400. (Harwood-CA)
- 5930.0 Spanish female 4-digit number station at 0200, parallel with 11533 at 0400. Parallel with 10665 at 0300. (Harwood-CA)
- 6300.0 At 0221 in USB, fishing boats (Here we go again-The Chief). Much profanity. Talked about smoking good Mexican weed. Talked about friends (Some friends-Chief) who would travel to Key West who would pick up men in gay bars. They would take them home and tie them up and rob them. Made \$10,000 a weekend. Had to leave when their pictures got plastered all over local newspapers. (Anonymous) This one wins the bizarre log of the month award-The Chief.
- 6683.0 SAM 973 working Andrews in USB then switched to LSB at 0112. (Hay-Ontario, Canada)
- 6693.0 Shelbourne Military working Wolf 32 in USB at 1816. (Battles-NH)
- 6738.0 This was a comedy. Architect (RAF Strike Command) tries to relay a message from MAC 23185 to Crayon via USAF GCCS Incirlik, Turkey. Very suspicious that Incirlik doesn't seem to know who Architect is and won't co-operate. But by 2023 they finally get it sorted out and Architect relays three immediate messages from 23185 to Crayon on a phone patch via Incirlik. Who is Crayon??? (Dunnett-UK)
- 6807.5 TNL-ASECNA Brazzaville, Congo with 873/48 RTTY traffic at 0435. (Hall-South Africa)
- 6825.0 Spanish female 5-digit number station in AM at 0500. (Harwood-CA)
- 6840.0 Spanish female 4-digit number station in AM at 0238. (Storz-TX)
- 6972.0 Heard at 0230. (Penson-MN)
- 7391.4 YOG59-Rompress, Bucharest, Romania with RTTY news at 1753. (Boender-Netherlands)
- 7391.4 NNN0HBN-US Navy MARS working NNN0CEK in USB at 0450. Couldn't find CEK in any of my books but the ship was out of Norfolk. (Harwood-CA) NNN0CEK is the USS Wasp LHD-1-The Chief.
- 7404.0 German female Papa November number station at 0601 in AM. (Fernandez-MA)
- 7422.0 Spanish female 4-digit number station at 0300 and parallel with 11533 at 0400. (Harwood-CA)
- 7439.0 Fishing fleet with profanity in USB at 0405. (Harwood-CA)
- 7540.0 English female 5-letter station in USB at 0545. (Harwood-CA)
- 7623.0 Very unusual maps, very screechy signal. Polar stereographic projection. English wording in the titles at 0340 using fax. (Jacques d'Avignon-Ontario, Canada) Anybody???-The Chief
- 7887.0 English accented female with 5-figure groups in USB at 0537. (Hal Bilodeau-IL)
- 7888.0 Spanish female 5-digit number station in AM at 0600. (Harwood-CA)
- 7895.0 CW beacon heard on this frequency sending 7 dits and 1 dah at 0747. (Gordon Trigg-New Zealand)
- 8070.0 Spanish female 4-digit number station in AM at 0115. (Storz-TX)
- 8176.0 English female number station at 0202, parallel with 6937. (Fernandez-MA)
- 8212.3 BETA1 working BETA4 in packet at 0400. (Bilodeau-IL)
- 8846.0 Canadian Navy IS3B (P-3 aircraft) working New York radio in USB at 1400. (O'Connor-NH)
- 8898.0 'S' CW beacon at 0731 with clicking sounds between each 'S' of varying lengths. (Gordon Trigg-New Zealand)
- 8939.0 Kiev, Rostov, Riga, Leningrad and Moscows VOLMET in Russian by females at 5 minute intervals starting at 0253 in USB. (Bilodeau-IL) Kiev heard at 0520. (Fernandez-MA)
- 8993.0 Pink 73 (SAC KC-10) with phone patch through MacDill at 1552 in USB. (O'Connor-NH)
- 9002.0 Scrambled voice comms heard at 0355 in USB. (Harwood-CA)
- 9060.0 English female 5-digit number station in AM at 0513. (Bilodeau-IL)
- 9190.0 Moscow Meteo with coded RTTY weather broadcast at 1743. (Andy Boender-Netherlands)
- 9224.0 Spanish female 4-digit number station in AM at 0330. (Harwood-CA)



9244.0 English male 5-digit number station in USB at 0300. (Harwood-CA)  
 9260.0 Stingray and Carpenter trying to find a quiet frequency, switched to Alpha 11, if no-joy try Alpha 5 in USB at 0345. (Harwood-CA)  
 9325.0 German female 3/2-digit number station in USB at 0111. (Bilodeau-IL)  
 9980.7 This might be NPM, but no listing for this frequency. Very close to KVM70 (9978.0) also in Hawaii. Is that close enough? Definitely not KVM70; I have checked. Maps are from the Pacific area. (d'Avignon-Ontario, Canada)  
 NAM-Norfolk, VA with SFC pressure chart using FAX at 0415. (Bilodeau-IL) *Looks like your unid Jacques-The Chief.*  
 10040.0 English female 5-digit number station in AM at 0502. (Fernandez-MA)  
 10270.0 Female in English calling 843 three times then zero five times. Abruptly off air at 0231 in USB. (Bilodeau-IL)  
 10290.0 8WS and NO3 saying the base station is down and can't be reached by radio, use the telephone. Advise other base station in USB at 2338. (Storz-TX)  
 10344.0 Spanish female 5-digit number station at 0510 in AM. (Harwood-CA)  
 10390.0 FSB-Interpol Paris, France with SITOR idler and CW ID at 0205. (Hardesten-NC)  
 10445.0 Spanish female 4-digit number station in AM at 0400. (Harwood-CA)  
 10600.0 Spanish female numbers station heard at 0200 in AM. (Tony Storz-Houston, TX)  
 10665.0 Spanish female 4-digit number station in AM at 0300, parallel with 5930. Heard most nights 0200-0400. (Harwood-CA)  
 10740.0 German female 5-digit number station in AM at 0109. (Storz-TX)  
 10780.0 King 02 called Cape Radio requesting Cape Radio release them at 1148 in USB. (Henry Brown-East Falmouth, MA)  
 10800.0 Several French forces callsigns noted here using ARQ-E3 transmission mode at 1741. (John Robinson-Antioch, TN)  
 10956.0 HBD20-MFA Berne, Switzerland with SITOR-A messages at 1425. (Boender-Netherlands)  
 11063.0 LZU2-Sofia Meteo, Bulgaria with RTTY coded weather broadcast at 1610. (Andy Boender-Netherlands)  
 11108.0 German female 5-digit number station in AM at 0045. (Storz-TX)  
 11176.0 Red Dog 3 (aircraft working USAF GCCS Ascension Island at 2341 in USB. (Dix-NY)  
 11214.0 Nathe 32 (E-3) working Edmonton military with phone patch to Raymond 24 (Tinker AFB) passing coded traffic. NORAD training ops. (Battles-NH)  
 11243.0 Dandelion working Sweetgum that Flimflam is waiting for him on X-905 and X-906 at 0223. (Storz-TX) *SAC primary air/ground channel mostly daytime-The Chief.*  
 Fire Breath with an EAM broadcast at 1415 in USB. (Mike Starr-Hadley-MN) *Make sure you report the window frequency or the stations you are hearing-The Chief.*  
 11318.0 Kuibyshev Russian VOLMET on with Russian weather by female announcer. Other Russian locations heard every 5 minutes in USB at 0450. (Fernandez-MA)  
 11410.5 PCW1-MFA Den Haag, Netherlands with Sitor-A marker and CW ID at 0405. (Hardesten-NC)  
 11417.0 3 males with heavy Irish accents discussing fishing ops around Ireland coast in USB at 0445. (Fernandez-MA)  
 11533.0 Spanish female 4-digit number station in AM at 0215. (Storz-TX)  
 12156.0 Spanish female 4-digit number station in AM at 0215. (Storz-TX)  
 12172.0 English female 5-digit number station in AM at 0220. (Fernandez-MA)  
 12300.0 Spanish female 4-digit number station in AM at 0115. (Storz-TX)  
 13440.0 YZJ5-Tanjung news agency, Yugoslavia with RTTY 425/50 English news bulletins at 0428. (Mark Burkart, KB5GVK-New Orleans, LA)  
 13538.0 ZRO3-Pretoria Meteo, South Africa with 120/576 FAX charts at 0710. (Hall-South Africa)  
 14440.0 Foghorn type station heard with various sound effects at 0156. (Penon-MN)  
 14477.0 NNN0CRZ-USS America (CV-66) working NNN0HBL with Navy MARS phone patch traffic at 0438 in USB. (Perdue-AL)  
 14704.0 A female in English giving 3-digit numbers followed by 2-digit numbers at 1341 in AM. I haven't the slightest idea what this is! (Ron Pratt-Oak Harbor, WA) *Ron, you have stumbled on what we use call a number station. Most of us believe that these stations broadcast spy messages-The Chief.*  
 14842.0 ATV65-New Delhi, India with wind direction and speed chart covering Africa to Indonesia at 0219. FAX 120/576. (Bilodeau-IL)  
 14902.0 Mocking Bird (NCS), Eagle Nest 84, Wigwam, Sparrow 977, Blue Chip, Thunderbird 57 with call up, check ins and signal reports at 1530 in USB. Noted bad QRM so stations QSY to 11975 then at 1600 QSY'ed to a 20 MHz frequency. (Larry Williams-Radio Research, Greenville, ) *Thanks Larry very interesting log-The Chief.*  
 15000.0 VNG-Canberra, Australia, Time Signal Station in AM at 0115 with voice announcements every 15 minutes. (Trigg-New Zealand)

15363.4 3MA22-CNA Taipei, Taiwan with English RTTY news bulletin, 798/50 at 1515. (Hall-South Africa)  
 15945.0 JAM33-Kyodo Tokyo, Japan with 858/50 RTTY news bulletin in English at 0855. (Hall-South Africa)  
 16016.4 RFQP-French Forces, Djibouti with ARQ-E3 ID at 1205. (Hall-South Africa)  
 17413.0 GHH-St. Helena Meteo with 396/48 RTTY traffic at 1435. (Hall-South Africa) *That is a nice catch here stateside Robert-The Chief.*  
 17458.0 'T' single letter CW beacon at 1900. (Szalony-CA)  
 17520.0 REM55-APN News Agency, Moscow, USSR with 427/96 RTTY Russian news bulletin at 0730. (Hall-South Africa)  
 17992.0 Spit Bail, Fandango, Snow Slide, Chick Egg and Camelot all up with comm checks. EAM traffic (SAC EC-135 aircraft) at 0036. (Battles-NH)  
 18320.0 OMZ-MFA Prague, Czechoslovakia with RTTY message to Tripoli. (Boender-Netherlands)  
 18440.0 RIF32-APN Moscow, USSR with RTTY 422/50 news bulletins at 1910. (Hall-South Africa)  
 18480.0 English female 3/2-digit number station at 2000 (Saturdays UTC) in AM. (Ronald Miller-Massillon, OH)  
 18744.2 NPM-Naval Station Pearl Harbor, HI with SFC wind 24 hour prog chart followed by 850 mb 24 hour prog chart both had wind vectors. FAX 120/576 at 0115. (Bilodeau-IL)  
 18726.0 English female 3/2-digit number station in AM at 1937. (Bilodeau-IL)  
 19010.0 ABM6USA-US Army MARS station, Schofield Barricks, HI talking with ABM1US-Camp Zama, Japan and checking to see if conditions were phone patch quality in USB at 0220. (Harwood-CA)  
 19031.5 RFA50-Radio Moscow, USSR broadcast feeder with a French news bulletin at 1700. (Hall-South Africa)  
 19306.8 PCW8-Dutch Embassy, Tripoli, Libya with 5 figure SITOR-A groups at 1556. (Hall-South Africa)  
 19956.5 NNN0NYC-Turk Island, US Navy MARS talking with NNN0AIO in USB at 0445. (Harwood-CA)  
 19980.0 9BC33-IRNA Tehran, Iran with RTTY 'In the name of God', then propaganda at 1510. Is He on the air as well? (Dunnett-UK)  
 20108.0 PHWR-Hickam AFB, HI with RTTY weather at 1230. (Hall-South Africa)  
 20408.5 Indonesian Embassy, Lagos, Nigeria with SITOR-A traffic to Jarkata at 1650. (Hall-South Africa)  
 20523.0 Repeat fax maps from NAM and NPM. Not in sync with either station until 2345. (d'Avignon-Ontario, Canada) *I don't have a clue on this one either-The Chief.*  
 21805.0 APN News Agency, Moscow, USSR with 415/96 RTTY news bulletins in English. (Hall-South Africa)  
 21965.0 Spanish female 5-digit number station in AM at 0021. (Hill-MI)  
 23325.0 USAF GCCS Albrook working Venus 050 at 0245 in USB. Venus 050 also heard on Nationwide frequency 415.7 MHz as Andrews aircraft 050 and on 20109.0. (Don Storck-Hemlock, MI)

THIS IS TO VERIFY RECEPTION

ON 2694 ..... KILOHERTZ AT 2026 GMT ..... ON  
 31 August 1972 SIGNED *[Signature]*  
 COMMUNICATIONS OFFICER



Coast Guard Helicopter 1395  
 U.S. Coast Guard Air Station Cape Cod  
 Otis AFB, Mass.


*Some utility stations have QSL cards of their own such as the one above (sent in by Dave Glow), but you may wish to consider submitting a prepared QSL along with your reception report for a speedier response.*



# The Scanning Report

**Bob Kay**

c/o MT, P.O. Box 98  
Brasstown, NC 28902

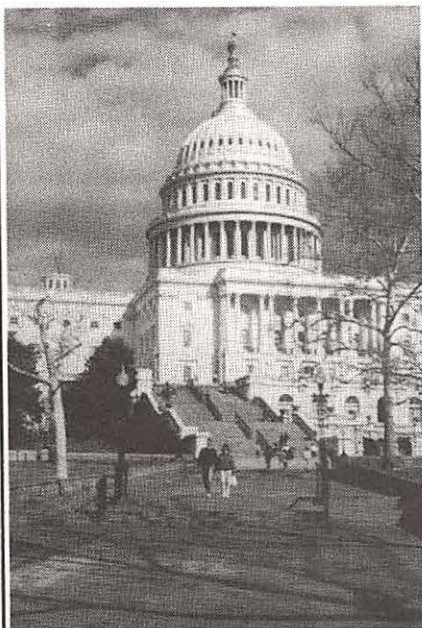

*Are you tired of reading negative comments about the hobby of scanning? Here's a positive approach you can copy and send to your representative in Washington.*

## Crime Scan

During the past few months, my mail bag has contained a large number of 800 megahertz news clippings. "Listening to police and fire calls—no longer possible," was the headline from one article. Another read, "Thousands of Scanner Listeners are Tuned Out."

Although the articles came from cities throughout the nation, they all centered around the misconception that an 800 megahertz trunked system could not be monitored with a scanner radio. The articles also portrayed the hobby of scanning in a negative manner. One reporter wrote, "The electronic voyeurs of the city will no longer have a method of eavesdropping on the police and fire departments."

Scanner hobbyists are comprised of a very diversified group of individuals. Doctors, lawyers, teachers, and nearly every active or retired police officer or fire fighter have scanner radios. A larger number of listeners are every-day citizens, who have proven that they can be valuable assets to their local police departments. And as you and I already know, scanner listeners are not electronic voyeurs that "eavesdrop" on their local police. A large percentage of scanner listeners have helped police departments to catch criminals and to save lives.

To set the record straight, and to promote the positive side of scanning, here's an "open letter," that you can send to your local newspaper, police department or representative in Washington, D.C.

## Treasure Hunt

As scanner hobbyists, we all realize that wireless intercoms and monitors have the unique ability to broadcast our personal business across the entire neighborhood. Are you one of the many scanner buffs who, for this reason, have refused to use a wireless intercom or baby monitor in their homes. If so, you probably haven't heard about Midland's state-of-the-art wireless intercoms that utilize the existing AC power wiring in your home.

Sure, I know what you're thinking. Power line intercoms are noisy and limited to one channel. But the folks at Midland have done their homework. The 72-021/022 intercom operates very efficiently and quietly on FM. To further reduce the possibility of noise, Midland added a noise reduction circuit and a fully automatic squelch circuit.

Dear:

When citizens monitor public safety communications, their ears and eyes can be very helpful to the local police. In the past few months, there have been numerous instances in which scanner listeners have assisted police officers in tracking fleeing criminals. Here are a few examples:

1.) In Virginia, a scanner buff called in the location of two robbery suspects to his local police. He identified the suspects' car by listening to a police dispatch on his scanner radio.

2.) The Police Chief in Spencer, Massachusetts, ordered his officers to stop scrambling their voice transmissions. The Chief realized that clear voice transmissions helped citizens with scanner radios to help their local police.

3.) When a three year old Florida girl started choking, her mother quickly dialed 911. A local scanner buff, living just several houses away, heard the emergency call and ran to the location within seconds. When the ambulance crew arrived seven minutes later, they credited the scanner listener with saving the victim's life.

In addition to helping police to catch criminals, scanner listeners have pulled drowning victims from pools, given CPR, stopped bleeding, and offered similar medical aid before emergency crews arrived. How? By listening to their scanner radios and responding to a call for help.


With today's 400 channel, synthesized scanner radios, scanner buffs can instantly monitor the radio communications of an entire city. In many instances, scanner hobbyists have state-of-the-art equipment that would be envied by many police departments. And in an age where most people choose to ignore calls for help, scanner listeners are willing to offer aid at a moment's notice.

If police departments would encourage citizens to monitor the public service bands, the overall effectiveness of community "Crime Watch" programs would improve dramatically. When scanner buffs become Crime Watch volunteers, the program becomes a high tech deterrent to neighborhood crime. Residents in Spencer, Massachusetts, call it, "Crime Scan." Best of all, Crime Scan volunteers are never required to leave the safety of their homes. They simply sit at a window and listen to their scanner radios. If they see a stolen car or robbery suspect, they call the police.

As our cities struggle with deep budget cuts, decreased government aid, and soaring crime rates, scanner listeners are providing a free community service that has proven its ability to deter crime and save lives. For these reasons, our communities can't afford to ignore the proven results that scanning can provide. For further information on the hobby of scanning, contact the following: Monitoring Times Magazine, P.O. Box 98, Brasstown, NC 28902; North East Scanning News, 212 West Broad Street, Paulsboro, NJ 08066; All Ohio Scanner Club, 50 Villa Road, Springfield, Ohio 45503-1036; National Scanning Report, P.O. Box 291918, Kettering, OH 45429; Radio Communications Monitoring Association, P.O. Box 542, Silverado, CA 92676.

In addition to offering quiet, FM conversations, the 72-021/022 also features three separate channels. With four units installed in your home or office, you could easily talk to three separate individuals with complete privacy.



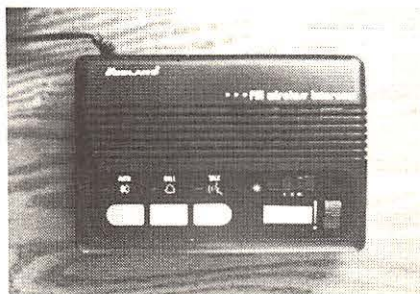

*The Midland 72-021 Intercom is the most advanced unit on today's market. To win one for your scanning shack, check out the Treasure Hunt.*

Now, here's the best part. Midland has provided two intercom units that you can win. Here are the clues:

1. What are the *MT* convention dates?
2. Look in the July 91 issue of *MT* and provide the price of a "Hickock 5700."
3. The Bearcat BC760XLT can monitor the military aircraft band. True or False?
4. Look in the July 91 issue of *MT*, and provide the radio station call letters of Scott Lovett and Scott Gallagher.
5. Check out Optoelectronics and provide the price for the new "2300."

Did I mention that the 72-021/022 is voice activated? To use this handy feature, you simply touch the "auto" button. Any sound produced in the area will be transmitted to another unit. It's a great way to monitor a room in complete privacy.

If you can't find the new intercom at your local department store, readers can contact Midland International at 1690 N. Topping, Kansas City, Missouri 64120.

Okay, gang, that's it. Send your answers to the "Treasure Hunt," P.O. Box 98, Brasstown, NC 28902.

## Frequency Exchange

Welcome to Fort Wayne, Indiana. Jack Forbing lives here, and he has provided the following list of frequencies:

### Grissom Air Force Base

251.100	Base operations	271.300	Final approach
255.400	Flight service	271.800	Base approach
260.200	Air refueling	272.800	Base approach
270.100	Tac. air to ground		

From the town of Eugene, Oregon, an anonymous contributor sent in a nice list of city frequencies:

Eugene Police	Springfield Police	Lane County Police
460.050	460.125	460.175
460.175	460.475	460.225
460.300	460.425	
460.350	460.500	

Oregon State Police	Local Gov't	Private Security
154.785	155.055	461.050 Valley Mall
154.860	453.425	461.125 Gateway Mall
154.905	453.575	461.325 Collins

Did you know that the Ford Motor Company has a plant in Louisville, Kentucky? If you're in the area, here are the frequencies:

### Ford Motor Company

462.212	Body shop	462.412	Paint
462.325	Security	467.170	Security
462.250	Management	467.500	Security
462.300	Central Maintenance		

## Computer Aided Scanning

*a new dimension in communications from Datametrics*



Now you can enhance your ICOM communications receiver through a powerful computer controlled system by Datametrics, the leader in Computer Aided Scanning. The system is as significant as the digital scanner was five years ago and is changing the way people think about radio communications.

- The Datametrics Communications Manager provides computer control over the ICOM R7000 or R71A receiver.
- Comprehensive manual includes step by step instructions, screen displays, and reference information.
- Powerful menu driven software includes full monitoring display, digital spectrum analyzer and system editor.
- Extends ICOM capabilities including autolog recording facilities, 1000 channel capacity per file, and much more.
- Innovative hardware design requires no internal connections.
- Overcomes ICOM limitations such as ineffective scan delay.

## Datametrics, Inc

- R7000 system \$ 349
- R71A system \$ 349
- Manual and demo disk \$15

Requires ICOM receiver and IBM PC with 512K and serial port. The R71A version also requires an ICOM UX-14.

Send check or money order to Datametrics, Inc., 2575 South Bayshore Dr, Suite 8A, Coconut Grove, FL 33133. 30 day return privileges apply.

In addition to providing the above frequencies, Steve Stenbro also included his local police and fire frequencies:

### Louisville, Kentucky

Police		Fire
460.025	General traffic	460.550
460.150	Riot police	460.575
460.225	Vice squad	460.600
460.375	Traffic	460.625
460.475	Service	

Anyone need the business frequencies for Green Bay, Wisconsin? If so, check out the following list from Duaine Stueck.

151.655	Medi Van Transportation	462.000	Larsen Canning Co.
451.825	Stokley Canning	463.550	Peters Concrete
455.850	WGEE Radio remote	464.800	Ind. Security Co.
461.8755	Metro Rescue		

Our final stop for this month will be Lewiston, Idaho. L. L. Carter lives in the area, and here are his favorite frequencies:

151.335	Fish & Game	159.330	Fish & Game
152.685	Grain Elevators	159.750	Asotin Road Crews
153.290	Potlatch Corp.	171.575	Forest Service
154.190	Lew-Clark-Asotin Fire	460.100	Idaho State Patrol
154.475	Washington St. Patrol	460.125	Lewiston Police
154.770	Washington St. Patrol	460.200	Idaho State Police
155.415	Clarkston/Asotin Police	460.450	Nez Perce Cty Sheriff
158.760	Lewiston Public Works	460.500	Nez Perce Cty Sheriff



To invite the Frequency Exchange to your neck-of-the-woods, send a list of your local frequencies to the Frequency Exchange, P.O. Box 98, Brasstown, NC 28902. Hope to visit with you soon!

## Computer Corner

Hey gang, I've got a neat frequency management program on a 5-1/4 disk. It's simple, straightforward, and very easy to use. Within 10 minutes of popping it in your computer, you'll be loading, sorting and storing frequencies.

The program is in ASCII format. It will run on any IBM, Tandy or IBM clone. It won't work in the Apple series computers. If you want it, come and get it—it's free. Here's the deal:

Send me a self addressed, diskette mailer with two 29 cent stamps. I'll supply the disk and copy the program for you. If you don't care to send the diskette mailer, that's okay. Put \$4.00 in an envelope, and I'll lick the stamps, buy the mailer, buy the diskette, and run to the post office.

The offer is good until October 14, 1991. That should give everyone ample time to get their requests in the mail. In the meantime, keep sending in your computer programs and ideas. I promise to review, and share the good stuff with everyone.

## And the Winners Are:

As most of you know, the "Treasure Hunt" has been a big success. I'll be the first to admit that I often get so busy collecting and finding new treasures that I forget to tell you guys who won. Without any further excuses, here are the 1991 winners:

### January/February Treasure Hunt

Prize: Two frequency counters from Optoelectronics

Winner: John Kaiser, Daytona Beach, FL

Winner: Gordon Amey Jr., Baltimore, Maryland

### March/April

Prize: 35 MM camera by Minolta

Winner: Joseph McKavage, Wilkes Barre, PA

### May/June


Prize: Scanner Beam from Grove Enterprises

Winner: David Smith, Clarksville, IN

### July/August

Prize: Weather Station by DIGITAR

Winner: To be announced

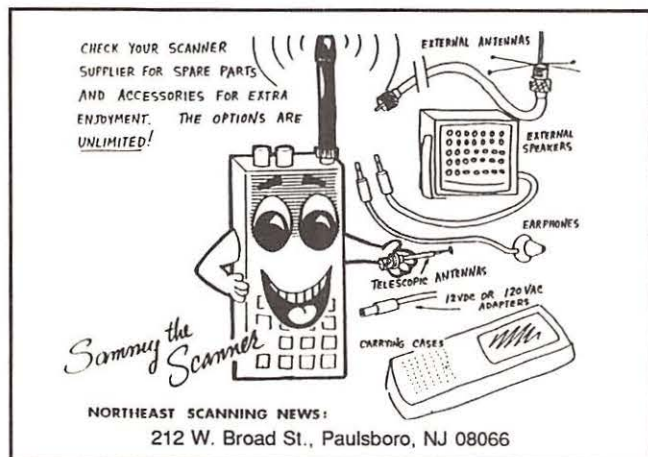

When you participate in the Treasure Hunt, you can increase your chances of winning by adhering to the following rules:

1. FAX entries are not allowed.
2. One entry per envelope.
3. The use of post cards is encouraged.

If you have further questions, don't hesitate to write. Please include an SASE with your correspondence to: Treasure Hunt, P.O. Box 98, Brasstown, NC 28902.

## Cellular Newshounds

Move over scanner buffs, we have competition. The news media have discovered cellular phone monitoring! But unlike scanner buffs, news reporters don't just sit home and listen—they use the cellular bands to hunt down hot news reports. Here's a typical example:

In Gainesville, Florida, news journalists have beat law enforcement officers to several crime scenes. How? By monitoring cellular phone conversations.

To prevent news reporters from gaining the "edge" on police, Florida law enforcement officials have requested cellular carriers to begin cellular encryption.

Several of the larger carriers in Florida have already begun testing a wide area, cellular voice security system.

## The 10 Million Dollar Radio

Think fast. What has 25 channels, retails for 10 million dollars, and is not user friendly? If you guessed the new police radio system in Toledo, Ohio, you're absolutely correct.

Police officers have discovered that they can't reach the dispatcher by pressing a single button. In some instances, officers had to manually step through 25 channels to get back to the dispatcher.

The folks at Motorola, who sold and installed the system, said that the radio network is exactly what the city ordered. Stay tuned for further details!

## Next Month

Looking forward to meeting you in Knoxville!

## Scanning Test

Here are the names so far of the Scanner Buffs who have passed the Expert Exam:

Dudley Lane Dortch IV  
Pedro Torres  
Barry E. Brubaker  
Keith D. Wentzel  
Clive Morel  
William Young

Michael E. Pollock  
John R. Stork  
Marc D. Luther  
Walter Maier  
James Sommers  
Harry Schrieffer

Can you become a Scanning Communications Expert? There's only one way to find out—take the test. There are three skill levels; Novice, Specialist, and Scanning Communications Expert. You can take all three tests, or you can skip directly to the expert level.

The price of each individual test is \$10.00 dollars. If you want to skip the first two levels, the Expert exam can be taken for \$30.00.

I suggest that you take all three tests, one at a time. Each test will help to build your confidence, and you will become familiar with the types of questions that are being asked. To take the challenge, send a check or money order to: Scanning Test, P.O. Box 695, Honeybrook, PA 19344.



# Cellular Fone Fighter

*Personal communications without the monthly bill.*

By Don Stoner, W6TNS

I couldn't believe it! In order to buy a cellular phone, I had to sign up for a year of service—good or bad. I also had to pay a minimum charge each month, even if I didn't make a single call. And, if I did use it—their electronic cash register gobbled up 40 cents a minute!!

## THEN SANITY PREVAILED

My ever practical wife doused me with a bucketful of reality. "Why do you need a cellular phone? You've got a ham license," she reasoned. "At those prices you could pay for a handheld two-way radio in a few months."

She was right—as usual. I wanted the phone to keep in touch with the family and friends. A phone in the car would save a lot of grief in an emergency. My bride reminded me that ham radio could provide all this and a lot more, so long as I didn't use it for business (that's not permitted in the Amateur Radio Service). Most important, the price was right—it was free!


Don't confuse ham radio with CB—there's a world of difference! Amateurs use FM two-way radios for static-free, one conversation at-a-time, communication. When transmitting via mountain-top repeaters, hams communicate over ranges of a hundred miles or more using tiny radios that fit in a purse or pocket.

## WANT TO MAKE NEW FRIENDS?

If so, ham radio is for you. Anyone can be a ham radio operator. There's no age restriction or nationality requirement. Other Amateurs don't care who you are or what you look like—you are just one of the many people that "hang out" on the ham bands. Amateur Radio is a great diversion for young people who need a new direction in their life.

Are you a boater? No matter where your vessel is located, you can contact an Amateur by radio. With a ham "rig" connected to your backstay, you are never out of radio contact with someone, somewhere in the world.

Ham radio is the most ideal hobby ever "invented" for retired persons. There is always someone to talk with at any hour of the day or night. With an FM two-way radio, you can have static free contact with other hams virtually anywhere you travel in the U.S.

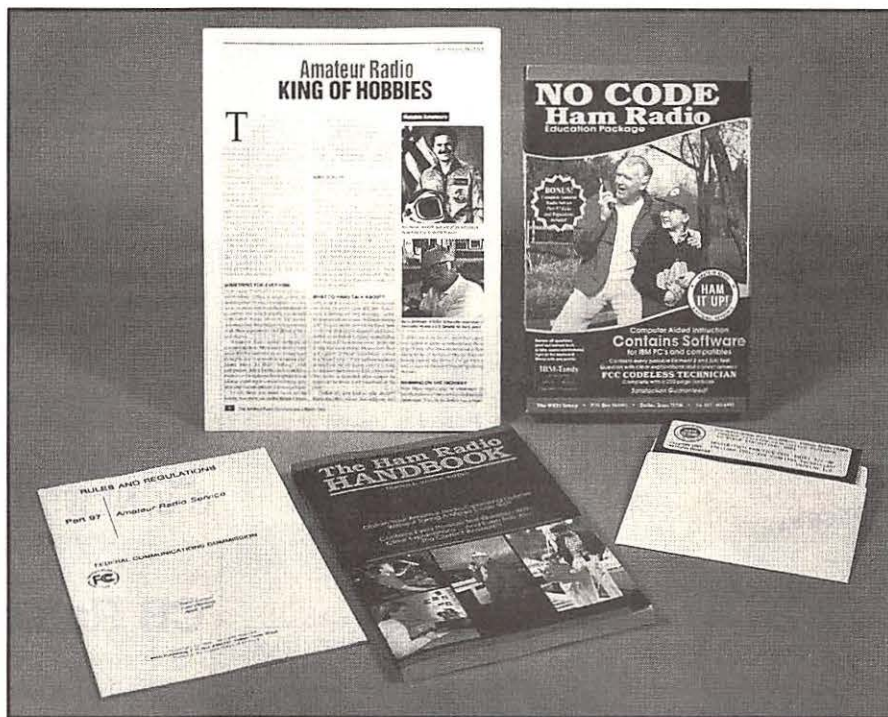

## TOO GOOD TO BE TRUE?

Sure, there's a catch. To operate a ham station, you need a license issued by the Federal Communications Commission. However, the FCC has eliminated the Morse code requirement for newcomers. You don't need to know a dot from a dash! To earn a license, all you have to do is pass a multiple choice written test. It's almost as easy as getting a drivers license—and there's no "driving test."

I've made getting a ham license even easier with a new book called *The Ham Radio Handbook*. The book includes every question you might be asked on the written test and all the possible answers for each multiple choice question. My book also tells you which answer is correct along with some simplified theory to explain why the answer is correct.

## THE DON STONER GUARANTEE

If you can earn a ham license at all, you can do it after reading my book. I'm so sure, I'll make this guarantee. If you fail your license exam after reading *The Ham Radio Handbook*, just return everything in salable condition and I'll refund the full purchase price—including postage (proof of purchase required). You can pass the ham test and I guarantee it!!

Take advantage of my bonus education package. I'll send the book, plus IBM

compatible software for testing your knowledge. It will tell you when you are ready to take your test. The program displays randomly selected questions, lets you pick the correct answer and grades your performance. Or, if you prefer, you can printout the tests. The package includes a complete list of Contact Volunteer Examiners. They can tell you where and when to take your test no matter where you live. The package contains a bonus booklet which provides all the FCC Rules and Regulations on ham radio. Another bonus is the certificate for a free copy of *The Amateur Radio Communicator*, the journal of the National Amateur Radio Association.


All this is yours if you place a free call to the National Amateur Radio Association at 1-800-GOT-2-HAM. Have your VISA or Master Card ready. Tell the operator you want the NARA Amateur Radio Educational package for \$29.95 (\$3.00 S&H) to any U.S. address. Or, if you just want the book, your cost is only \$9.95 (\$2.00 S&H) if you mention seeing this advertisement. If you prefer to send a check, write the National Amateur Radio Association, 16541 Redmond Way, Suite 232-C, Redmond, WA 98052.

*Ham radio is guaranteed to influence your life and future positively.*  
**DO IT TODAY!!**



# what's new?

Larry Miller

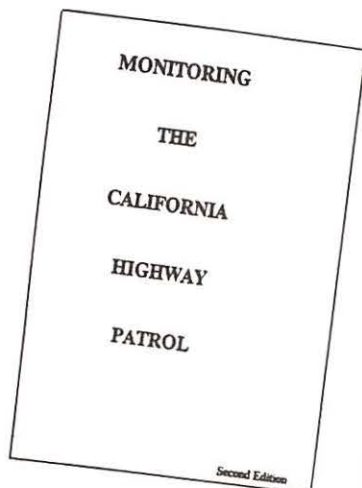


## Monitoring the California Highway Patrol

Many of us remember the glitzy, glamorized version of the California Highway Patrol presented by the TV show, "CHiPs." With little more plot than a bad episode of "Charlie's Angels," it may have been good PR for the organization, but hardly a realistic presentation.

Raul Taibo's new book, *Monitoring the California Highway Patrol* is the perfect anecdote to "CHiPs," the TV show. Divided into nine sections, it covers everything from C.H.P. Communications, beat assignments, geographical coverage and dispatching as well as frequency allocations, channel listings by area, scanning tips and codes.

As the author says in the forward of the book, it is "a comprehensive guide with many details not found in any other guide." It's in-depth without being overwhelming and easy-going enough to make it a pleasant read.

In short, it's a very good book. A stapled 8.5" x 11" publication of roughly a hundred pages, *Monitoring the California Highway Patrol* is priced at a reasonable \$8.95 plus \$1.00 postage and handling. Make checks payable to Raul Taibo, 448 Ignacio Blvd, Suite 172, Novato, California 94949.

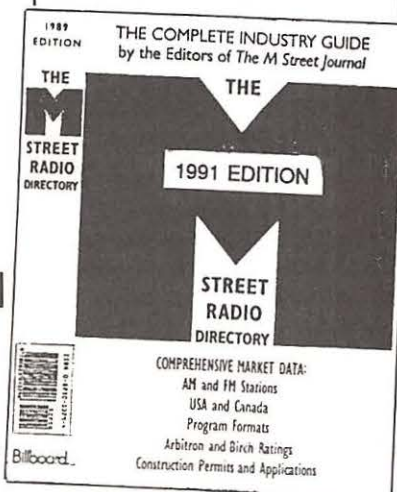

## 1991 M Street Radio Directory

The *M Street Radio Directory* is one of those books that keeps on getting better year after year. Conceived as a more accurate yet less expensive version of the revered *Broadcasting Yearbook* (minus TV and cable info), it is not only affordable but invaluable to anyone who does any DXing or listening to North American AM or FM radio.

Checking in at over 650 pages, the blue and green book contains virtually everything you

would want to know about a radio station, from call letters and address to power, format and even ratings. What's more, this information is presented in a variety of ways: alphabetically by state and city, alphabetically by call letters, by frequency and more. Canadian stations receive similar treatment.

The *M Street Radio Directory* is available from DX Radio Supply for \$29.95 plus \$2.05 book rate or \$3.35 UPS at P.O. Box 360, Wagontown, PA 19376.



## CB Radio

Of all the hundreds of CB radio publications that have been in operation since the 1970s, *C.B. News Voice* is perhaps among the last to survive. Published monthly by Charles Allen, it is a rough-hewn newsletter filled with information about people who call themselves "Pinky," "Falling Star" and "Busy Bee."

There are those "serious" monitors among us who would openly scoff at the idea of a CB publication, especially one so informal. But what makes *C.B. News Voice* so appealing is not its handful of advertisements or its list of upcoming "jamborees," but the very human, very personal and often very touching communications it contains.

Some are individual reminiscences, others offer encouragement to ailing members. Still others organize small fundraisers, buying a wheelchair for a young man injured in an accident or raising money to help defray the medical expenses of a 3 year old boy mauled by a pit bull.


*C.B. News Voice* is a slice of America at its very best. Don't expect something slick, though. This is one of the most honest, unpretentious publications we've seen. A subscription to *C.B. News*

*Voice* is \$12.00. Get yours from Charles Allen, 719 N. Grant Street, Bloomington, IN 47408-3649.

## Super Deals

A little slicker but still a newsletter is Marvin Birnbom's *Surplus Dealer News*. Also 8.5" x 11", it is packed with "deals" on things like "100,000 endless loop cassettes, 112,665 Noble Trimposts (in 57 different values — just \$3,700.00)" as well as people looking for surplus ("Hospital Seeking surplus 5 gallon stainless steel tanks").

The publisher bills *Surplus Dealer News* as "new, different." Information and subscriptions can be obtained for \$39.00 a year from P.O. Box 777, Champlain, NY 12919.

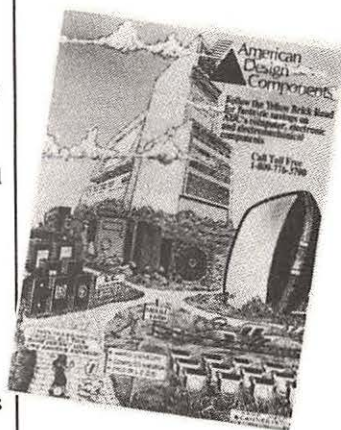

## Computer Goodies

American Design Components is one of the nation's leading wholesalers of electronic and electromagnetic devices. Geared to the needs of manufacturers, engineers, and researchers, ADC also welcomes the hobbyist, student tinkerer and computer buff.

Its new 54 page catalogue shows individually illustrated products including integrated circuits, crystals, fans, connectors,



semiconductors, batteries, LEDs, switches, and power supplies, as well as disk drives, monitors and add-on boards.

ADF suggests that their merchandise is "at costs far below normal factory prices."

You can get the catalogue free of charge if you mention *Monitoring Times* and call 1-800-776-3700.

## Superspy Stuff



The next time you see a well-dressed gentleman walking down the street with a briefcase, it could be an M.A.I.M.S. (Modular Audio Intelligence Monitoring System) from The Surveillance Technology Group. STG is a London-based firm with offices in a number of U.S. cities.

Each M.A.I.M.S. contains a body wire transmitter ("ideal for covert audio transmissions." Its scannerband signal can be picked up over 3,000 feet away), an STG 4102 ("Disguised as an ordinary ballpoint pen, the STG 4102 contains an antenna, ultra-high sensitivity microphone and UHF crystal controlled transmitter"), a switchable two channel receiver, tuned magnetic mount antenna kit, lapel microphone, bi-directional mini-shotgun microphone and Stealth micro-mini 50 hour recording system.

Interestingly, the firm's literature notes that the equipment's "factory set frequencies are not FCC approved for use in the United States," meaning that unless a firm specifically asks for standard US frequencies, you're liable to hear STG equipment popping up on some rather unusual places on the scanner.


For more information, write to the firm's New York City office at 201 East 42nd Street, NY 10017 or call 212-557-4022.



## World Map Clock

MFJ has released a neat-looking clock for DXers. The MFJ-110 DXers World Map Clock not only shows the time and date at any location in the world, it also lets you see it on the map. The MFJ-110 also shows day of the week, month, date and year.

To get yours send \$24.95 to MFJ, P.O. Box 494, Mississippi State, MS 39762 or call 601-323-5869. The MFJ-110 is also available at your favorite radio store.

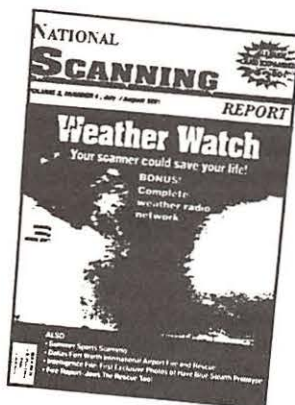

## Federal Frequency Lists

The Bearcat Radio Club (*National Scanning Report*) provides members with custom frequency research. Non-members can take advantage of this service for a nominal fee. Currently available are print-outs of federal government frequencies for Florida, Indiana, Kentucky,

## NEW COMMUNICATIONS GEAR

Covering DC to Daylight at Discount Prices!

AR-1000 Scanner	\$ 375
AR-2500 Scanner	\$ 455
Kenwood R-5000	\$ 850
AR-3000 Scanner	\$ 890
Japan Radio NRD-535	CALL
ICOM R-71A HF Scanning Receiver	\$ 850
Collins R390A (Reconditioned/Calibrated)	CALL
Japan Radio NRD-525	\$1125
SONY ICF-2010	\$ 349
SONY ICF-7600	\$ 220
SONY Pro-80	\$ 370
RACAL RA-6790 (GM)/R-2174	CALL
Bearcat BC-760XLT - w/Cellular Restoration	\$ 275
Bearcat BC-200XLT - w/Cellular Restoration	\$ 275

### FREE DELIVERY

WE OFFER REPAIR SERVICE \* MANUALS \* BROKERING  
PROFESSIONAL MONITORING STATION  
SEND \$2.00 FOR CATALOG CREDITED TO PURCHASE



### MIL-SPEC COMMUNICATIONS

P.O. Box 461, Wakefield, R.I. 02880  
Call Today (401) 783-7106




Maryland, Michigan, New York, Ohio, Texas and Virginia. Each print-out is available for \$3.00 and a self-addressed, stamped envelope from P.O. Box 291918, Kettering, Ohio 45429.

To get a list of other available publications, send a self-addressed, stamped envelope with the word "list" written on the front.

## Denver Metro Scanner Guide

*The Denver Metro Scanner Guide* contains an impressive collection of useful information. Not content to simply tell you where to listen, the book starts off with the latest radio news from the area, a "how to" article on trunked 800 MHz systems, and frequencies — 63 pages of frequencies, all hot and, according to our sources, right on target. Frequencies are sorted by agency, location, and frequency. The

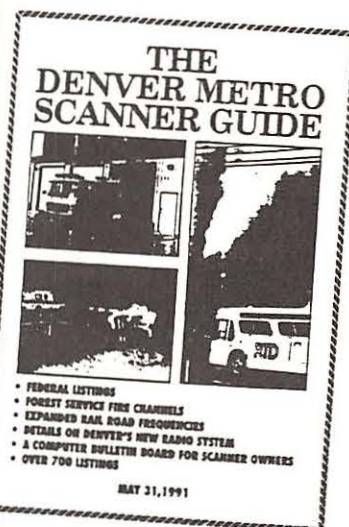

coverage area of the book runs from the Wyoming line south to the Douglas County/El Paso line.

*The Denver Metro Scanner Guide* is available at most Denver, Colorado, area radio stores and news agencies. Prices vary according to dealer.



## Shortwave Frequency Charts

A company called FBenterprises ("Where FB means Fine Business") has produced a series of 5.5" x 8" laminated cards called "Quick-N-Easy Shortwave Listening." Each card contains hour-by-hour listings of shortwave broadcast frequencies. The list is neither all-inclusive in terms of stations covered nor frequencies provided, but does serve as a satisfactory sampler.

There is, though, a west coast bias that listeners in other parts of the country could find confusing. For example, CKZU, Canada, the micro-powered CBC outlet in Vancouver, B.C., is listed among powerhouses like Radio Moscow and Radio Netherlands. Probably audible at FBenterprises' headquarters in Vancouver, Washington, it is a rare DX catch elsewhere. (CKZU does have an equally inaudible micro-powered cousin at St. John's, Newfoundland.)

Still, the cards are good looking products of the desktop publishing revolution and could serve as a very nice introduction to newcomers who are unfamiliar with, or overwhelmed by, more extensive frequency listings such as those found in *Monitoring Times*.

Each card is \$4.95 from FBenterprises, 8818 Rainer Dr., Vancouver, WA 98664.



## Arthur Cushen's Radio Listeners Guide


Back in 1988, New Zealand DXer Arthur Cushen produced a book composed primarily of reprints from local radio publications. It was a pleasant, if eclectic, mix of articles.

Cushen has now produced what he calls a "completely revised and updated" version of the book. Layout and format have remained the same but a few of the articles have been updated to cover recent changes, such as Radio New Zealand International's emergence from the darkness of 7.5 kilowatts to audible power levels.

In addition, Cushen has added what he calls "an exciting new extra, Secrets of Wartime Listening" that includes "blow-by-blow descriptions of the battles in the South Pacific."

Also included are articles on New Zealand and Australian mediumwave stations, a look at the 1990 Auckland (DX?) convention, and a feature called "Print Disabled Radio — another look," among others.

Arthur Cushen's *Radio Listener's Guide* still remains a pleasant, if eclectic, mix of articles. The price is \$17.50 US plus shipping. For a list of worldwide distributors, write to Arthur Cushen at 212 Earn Street, Enwood, Invercargill, New Zealand.

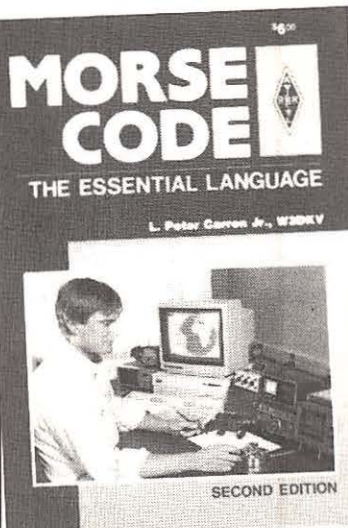

## More on Morse

Now that the no-code ham radio license is here and we've all suffered through more than our fair share of "Morse code is dead" articles and editorials, we get the first convincing book on this communications mode in decades.


L. Peter Carron, Jr., W3DKV, has produced an enjoyable, readable, and even tempting book on Morse code. From "Why the Code" (Did you know that NASA still uses Morse code as a back-up should voice communications fail? A device has been arranged to allow keying through the astronaut's umbilical, which is normally used for voice control.) to "Learning to Receive and Send," the book is surprisingly convincing and might even serve to increase interest in the mode.

*Morse Code: The Essential Language* is available from the ARRL for \$6.00 plus \$3.00 postage from, 225 Main Street, Newington, CT 06111.

Hey, maybe that no-code license wasn't such a good idea after all...


## Two Meter Antenna

According to Cushcraft, their new 26B2 Two Meter FM antenna offers the highest gain of any 2 meter FM antenna in the world. The 26B2 replaces the



popular 230WB but provides more gain, cleaner pattern, and improved ultramatch feed system plus reduced weight and windload.

The package includes two antennas, stacking frame, and wiring harness — everything you need. The 26B2, which Cushcraft calls "The Boomer," is available from your favorite radio dealer. No price was provided.

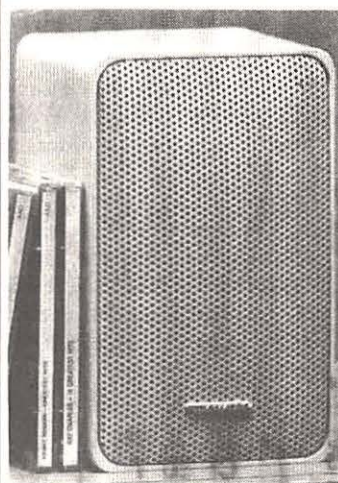

## Super Speaker Deal

Radio Shack has been discounting their Minimus-7 speaker system. Each speaker is only 7 inches high yet delivers surprisingly full-size sound. The Minimus-7 makes an excellent external speaker for a shortwave radio or scanner.

Previously \$49.95 each, the speakers are now discounted to \$29.95 each. See your local Radio Shack store for details.



## AOR's New AR1000XC Hand-Held Scanner



A year or so ago AOR introduced their wide-frequency-coverage, hand-held scanner, the AR1000. While the scanner had a great deal going for it, there were some complaints.

A prominent oscillator product obliterated reception on (or even near) 154.825 MHz; other "birdies" were heard elsewhere; the incorrect charger resulted in short operational life of the batteries; the squelch required different settings for different modes; the scanner tuned down to 8 MHz, but no lower, nor between 600 and 800 MHz; and the dial readings were 5 kHz high.

All of these shortcomings have been addressed in the new AR1000XC. Our sample had the correct AC charger/adaptor, the 154.825 MHz spur was minimal, squelch settings were close on all modes, we could tune continuously from 500 kHz through 1300 MHz with no gaps, and the frequency readout was right on.

The original unit carried a husky retail price of nearly \$500, but the new, improved model is available from many MT advertisers, including Grove Enterprises, at considerably less. Grove has the AR1000XC available for \$399 plus \$5 UPS shipping.

## AOR AR2800 Scanner

Contrary to the literature sent out by Ace Communications concerning their new AR2800 AOR scanner, it does not have continuous 500 kHz-1300 MHz frequency coverage. The 600-800 MHz gap, commonly found in wide-frequency-coverage scanners, is there.

Not to worry. This range is used only by UHF TV broadcasters, there is absolutely no two-way radio authorized for that range, and none has ever been reported as heard.

MT will have an in-depth look at this new programmable scanner, now in stock at Grove Enterprises and other MT advertisers, next month.



## World's Most Powerful CB and Amateur Mobile Antenna\*

**Lockheed Corp. Test Shows  
Wilson 1000 CB Antenna Has  
58% More Gain Than The  
K40 Antenna (on channel 40).**

In tests conducted by Lockheed Corporation, one of the world's largest Aerospace Companies, at their Rye Canyon Laboratory and Antenna Test Range, the Wilson 1000 was found to have 58% more power gain than the K40 Electronics Company, K40 CB Antenna. This means that the Wilson 1000 gives you 58% more gain on both transmit and receive. Now you can instantly increase your operating range by using a Wilson 1000.

**Guaranteed To Transmit and Receive  
Farther Than Any Other Mobile  
CB Antenna or Your Money Back\*\*  
New Design**

The Wilson 1000 higher gain performance is a result of new design developments that bring you the most powerful CB base loaded antenna available.

### Why Wilson 1000 Performs Better

Many CB antennas lose more than 50% of the power put into them. The power is wasted as heat loss in the plastic inside the coil form and not radiated as radio waves.

We have designed a new coil form which suspends the coil in air and still retains the rigidity needed for support. This new design eliminates 95% of the dielectric losses. We feel that this new design is so unique that we have filed a patent application on it.

In addition, we use 10 Ga. silver plated wire to reduce resistive losses to a minimum.

In order to handle higher power for amateur use, we used the more efficient direct coupling method of matching, rather than the lossy capacitor coupling. With this method the Wilson 1000 will handle 3000 watts of power.

### The Best You Can Buy

So far you have read about why the Wilson 1000 performs better, but it is also one of the most rugged antennas you can buy. It is made from high impact thermoplastics with ultraviolet protection. The threaded body mount and coil threads are stainless steel; the whip is tapered 17-7 ph. stainless steel. All of these reasons are why it is the best CB antenna on the market today, and we guarantee to you that it will outperform any CB antenna (K40, Formula 1, you name it) or your money back!

\*Inductively base loaded antennas

\*\*Call for details.

### Lockheed - California Company

A Division of Lockheed Corporation  
Burbank, California 91520

Aug. 21, 1987

Wilson Antenna Company Inc.  
3 Sunset Way, Unit A-10  
Green Valley Commerce Center  
Henderson, Nevada 89015

Subject: Comparative Gain Testing of Citizen's Band Antennas  
Ref: Rye Canyon Antenna Lab File #670529

We have completed relative gain measurements of your model 1000 antenna using the K-40 antenna as the reference. The test was conducted with the antennas mounted on a 16' ground plane with a separation of greater than 300' between the transmit and test antennas. The antennas were tuned by the standard VSWR method. The results of the test are tabulated below:

FREQUENCY (MHZ)	RELATIVE GAIN (dB)	RELATIVE POWER GAIN (%)
26.965	1.30	35
27.015	1.30	35
27.065	1.45	40
27.115	1.60	45
27.165	1.50	41
27.215	1.60	45
27.265	1.75	50
27.315	1.95	57
27.365	2.00	58
27.405	2.00	58

**58%  
MORE  
POWER GAIN  
THAN THE  
K40**

**CALL TODAY**  
TOLL FREE: 1-800-541-6116  
FOR YOUR NEAREST DEALER  
**Wilson 1000**  
Available in Black or White

Roof Top Mount ..... \$99<sup>95</sup>  
Trunk Lip Mount ..... \$69<sup>95</sup>  
Magnetic Mount ..... \$79<sup>95</sup>  
Wilson 1000 Trucker ..... \$99<sup>95</sup>  
DEALERS Exclusive dealer areas still open

**Wilson**  
ANTENNA INC.  
1181 GRIER DR., STE. A  
LAS VEGAS, NV 89119

**To have your new product or book  
considered for review in *Monitoring Times*,  
send it to:**

**What's New? Monitoring Times  
P.O. Box 98, 140 Dog Branch Road  
Brasstown, NC 28902**



## Hamming It Up

Well folks, the *Monitoring Times* Convention is right around the corner. Time for Old Uncle Skip to pack his portmanteau and head to Knoxville, Tennessee. Last year many of you folks asked for more programs for beginners. The Groves said (like Captain Picard) MAKE IT SO! So I hit the phones and got together a group of radio experts all intent on making things understandable to the beginners in our hobby.

I thought I had all the bases covered when the hot line from Brasstown rang. "Yo, Uncle Skip! Folks want a forum on getting started in ham radio. MAKE IT SO!"

This led me into a panic. While I have been a licensed amateur radio operator for more years than I care to remember, I just had not given a lot of thought to being a beginning ham since, well, since I was a beginning ham.

Not to worry; a call placed to Brian Battles WS1O at The American Radio Relay League quickly got me back in the loop with the latest information on breaking into the wonderful world of ham radio.

If you are like most recent converts to shortwave monitoring, you have probably stumbled around in the region known as the 41 meter band (7100 through 7300 kHz). Beyond the various broadcast station loggings you were able to chalk up, you probably heard many stations transmitting in International Morse Code or in the now familiar "Duck Quack" of Single Sideband. These stations will often seem to be a bit of a pain in the diodes as you try to tune in to the 41 meter broadcast of Radio Free Freedonia.

What you are hearing are the signals sent out by amateur radio operators. You see, the hams have access to a portion of frequencies known as the 40 meter band (7000 through 7300 kHz). You guessed it Bunkey, ham radio and the 41 meter broadcast band overlap substantially! What is a budding DXer to do?

Be honest for a second . . . Haven't you ever entertained the notion that it might be fun to transmit radio signals as well as receive them? If you are particularly curious by nature (and what radio monitor isn't?) you have probably hit the Lower Sideband Control on your receiver and listened in on the conversations those 40 meter ham stations have going on among the big broadcasters.

If you have taken the time to do this, you have heard folks from all over the world talking with one another about every subject under the sun, especially RADIO! There is even a group of hams who gather on 7240 kHz every Sunday morning at 10 am Eastern Time to discuss shortwave listening.

Needless to say, monitoring hams often piques a person's interest in possibly becoming an amateur radio operator. But this is sometimes

easier said than done. How can a beginner in the radio hobby find out about how to get in on the fun of ham radio?

Well, welcome to Uncle Skip's Beginners Information Service and Bicycle Repair Emporium! The topic of discussion this evening will be . . .

### UNCLE SKIP'S GUIDE TO BECOMING A HAM

(No pun intended)

Okay, so just what is the bottom line here? What does it take to become an amateur radio operator? Basically there are no significant limits to becoming a ham. There are no barriers of age, sex or even technical ability. Children as young as 5 and folks so old that they were around when ALL radio was amateur radio enjoy communicating with one another through the medium of radio.

You do not have to fear being a beginner because amateur radio privileges are grouped more or less according to ability, experience and training. I say more or less because you will often find more qualified hams communicating with beginners, helping them to learn about this exciting facet of the radio hobby. All it takes to begin enjoying ham radio is an amateur radio license.

You qualify for a ham license by taking a series of examinations known as elements. The class of amateur radio license you qualify for depends upon which elements you pass.

Don't let the idea of a whole passel of tests scare you, Mon Ami. What the element structure really does is break down the process of developing as an amateur radio operator into easy to master, bite sized segments. While there are five classes of amateur radio licenses, each with different privileges, we will concentrate to the two essentially entry level license classes, known as the Novice and Technician licenses.



*The person on the other end of an amateur radio contact might be a U.S. Senator, a Greek maritime radio operator, or the captain of the Goodyear blimp! But two things put you on equal footing: your love of people and your love of radio.*

## To Code or Not to Code That is the Question

Recent changes in the regulations pertaining to amateur radio have removed the code test requirement from the Technician class of license. Over the years some folks have felt that the requirement to learn The International Morse Code served as a barrier to people who wanted to become hams.

As we look at the requirements for each of the entry level ham tickets, you will see that it makes a certain amount of sense to give code the old college try. If you can develop this skill quickly, so much the better. However, the new licensing structure allows you to begin to enjoy the excitement of amateur radio before your skills with the code have fully developed.

Anyway, if you have long stood by the excuse that you could never become a ham because "the code is too much of a hassle" you now have to seek out a new excuse to avoid all the fun.

## The Novice License

Just like it says on the label folks, this is the land of beginners! People holding the Novice class license have access to a chunk of frequencies where they can develop good operating practices that will make higher class license privileges that much more fun.

Novices can operate in the HF portion of the radio spectrum on 3675 through 3725 kHz in the 80 meter band, 7100 through 7150 kHz in the 40 meter band and 21100 through 21200 kHz in the 15 meter band using TELEGRAPHY. This means transmitting in International Morse Code. Novices also have Single Sideband voice privileges in the HF bands on 28300 through 28500 kHz in the 10 meter band.

While as a Novice you are limited to 200 Watts of power on these bands, you will be down among all those international shortwave broadcasters having the time of your life. Believe it or not, that 200 watts will get you around the world. As a shortwave listener, HF transmitting is as close to your regular listening practices as you can get. All you have learned about propagation and listening patterns from SWling will be of good use to you as you reach out across the Novice HF frequencies.

Novices also have the ability to use certain VHF frequencies. As a Novice you can operate from 222.1 through 223.91 MHz with 25 watts of power and 1270 through 1295 MHz with 5 watts of power. In these VHF frequencies you can experiment with all authorized modes of amateur communication including radioteletype (RTTY) and the "digital" modes such as packet radio.



These VHF privileges serve to wet your whistle for all that is available to you under the Technician class of license.

To qualify for the Novice ticket you must pass elements 1A and 2. Element 1A is a test of your ability to understand International Morse Code sent at five words per minute. Element 2 is a thirty question multiple choice examination on basic radio theory and operating regulations.

Don't give up yet, Bunkey. Old Uncle Skip is gonna clue you in on how to learn what you need to know in just a few minutes.

## The Technician License

Just as some facets of the Novice license might hold special appeal to the shortwave listener, the Technician ticket will especially excite the scanner monitors out there in MT land. You see, Technician class privileges give you access to all amateur radio frequencies and modes of operation above 50 MHz, the realm of VHF and UHF.

A Tech ticket buys you 50 MHz through 54 MHz, 144 through 148 MHz, 222 through 225 MHz. (Sorry folks, we just lost 220 through 222 MHz; you should have hopped on board sooner), 420 through 450 MHz, 902 through 928 MHz and 1240 through 1300 MHz. And to make the pot even sweeter, you can use all kinds of modes of communication including code, voice, data, RTTY, and TV.

You can rap with the astronauts on the Shuttle or the Russian MIR spacecraft. You can even send signals through satellites and bounce signals off the Moon. Yeah, I know the Moon is far away, but as a Technician you can drive up to 1500 watts to get your signal there and back again! And as any serious scanner person can tell you, there are many exciting propagation features to the VHF world. Signals can go extreme distances thanks to tropospheric ducting, sporadic "E" layer skip, and meteor scatter.

What I always liked about VHF ham operation is that the antennas are physically smaller and lend themselves to a great deal of experimentation.

To qualify for your Technician class license, you must sit for elements 2 and 3A. As we said before, element 2 is the Novice theory and regulations: 30 multiple choice questions. Element 3A is an additional 25 multiple choice questions on Technician class theory and regulations. Answer 55 questions in all (and no code test), and you can operate forever in the VHF world. Or later you can study the code, pass element 1A and add Novice class HF privileges to your quiver.

## How to Study

Fortunately, hams are a gregarious lot. They like to see that everyone gets a chance to join in the fun of amateur radio. Many companies have

produced study guides to help you prepare for whatever level of ham license your little old heart desires. You can find many of these resources listed in the ads in MT.

The best single source study guide for beginners covering both the Novice and the Code-Free Technician Class licenses is *Now You're Talking: Discover the World of Ham Radio*, \$19.00 plus \$4.00 shipping, published by The American Radio Relay League, 225 Main Street, Newington, CT 06111. This book will work you through all the theory and regulations including the complete question pools for the multiple choice questions that will make up elements 2 and 3A. It even gives you solid information about how to get on the air once you pass your exam. Old Uncle Skip can't get the point across in 2000 words so get this book and get the whole story.

If you choose to go the Novice class route, you also will need some assistance in learning the International Morse Code. As with books, many sources can be found in MT and elsewhere for code training cassettes. Again, the ARRL produces *Your Introduction to Morse Code on Cassettes* #348-7, \$10.00 plus \$3.00 shipping and handling. These cassettes teach you all the letters and numbers and bring you up to speed to pass the 5 WPM test that makes up element 1A. Once you have learned the code, you can get further practice by listening in on the Novice class code frequencies listed above.

## Where Can I Take the Tests?

Back when Old Uncle Skip was first licensed, I had to trudge on over to the Philadelphia Customs House where the FCC used to have its field office. A few years back, the Volunteer Examiners Program was established, making it possible for qualified hams to run exams for all classes of licenses. You can obtain a list of Volunteer Examining Teams in your area by once again writing to The ARRL's Educational Activities Department at the same address listed above.

If you are a scanner monitor, you might listen in to your area ham repeaters. Sometimes, organized nets give information about upcoming test sessions in your neck of the woods. Also, most hamfests will have VEC testing as part of the program.

## So What Are You Waiting For?

Join in the fun! Amateur radio lets you add to the monitoring possibilities out there. You will also be congregating with an entire world of folks dedicated to the radio hobby. Wade on in... the water ain't deep!



# NOW YOU'RE TALKING!

## The Code-Free Ham License is Here

Enjoy all Amateur Radio privileges above 30 MHz without having to pass a code test. All you have to do is pass a 55-question exam on basic radio and the FCC regulations. ARRL's new book, **Now You're Talking** makes understanding what is required on the test a snap! And there are exams given all over the country every weekend.



Just think how much fun you'll have communicating through repeaters, enjoy Sporadic E skip and worldwide communications on six meters when conditions are right. There's satellite communication and you can even talk to Astronauts and Cosmonauts in orbit. Enjoy friendly local communication both direct and through repeaters. Help with disaster drills and the real thing! Sound like fun? It is! Order your copy of **Now You're Talking** below: Enclosed is \$19 plus \$4 for shipping (a total of \$23) or charge \$23 to my ( ) VISA ( ) Mastercard ( ) Discover ( ) American Express

Signature \_\_\_\_\_

Acct. No. \_\_\_\_\_

Good from \_\_\_\_\_ Expires \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ MT

THE AMERICAN RADIO RELAY LEAGUE  
225 MAIN STREET  
NEWINGTON, CT 06111



## The Aftermath of the Storm

We all sat glued to our shortwave and military band receivers during the Persian Gulf War. It was a unique opportunity for military monitors to actually eavesdrop on a war as it was happening. From the comfort of our radio rooms, we could hear history in the making.

Suddenly a lot of us became popular with friends and the media. Shut out by the military, all were interested in what we could hear. Intrigued by the intercepted war communications, many people rushed out and bought receivers and joined in. Those of us with monitoring experience helped and welcomed newcomers to our hobby.

Some are still with us, others lost interest immediately. We welcome those who stuck with it and joined the ranks of radio monitors. May you never lose your fascination with radio.

### N\*E\*S\*T\*

Nuclear Emergency Search Team

#### CALLSIGNS AND BUZZWORDS

FLYNEST - Nuclear CBW (chemical biological warfare) team aircraft  
BROKEN ARROW - Damaged nuclear weapon emergency 2,000 ft perimeter.  
BENT SPEAR - Significant nuclear accident  
COVERED WAGON - Confirmed hostile act  
DULL SWORD - Nuclear incident  
FADED GIANT - Radiological incident or accident  
HELPING HAND - Threat of hostile act  
NO-LONE-ZONE - Lone individuals prohibited (nuclear weapons area)  
SAFE WIND - Emergency security order.  
SAMP - SAC high altitude air sampling aircraft  
WHAMO - Nuclear Emergency Search Team

### The Word Is:

Keep listening. The war is "officially" over, but there is still much to hear on the military bands. Saddam Hussein is still in power. Iraq is still in turmoil, and accusations and ultimatums

periodically heat things up all over again: Iraq has not met all the U.N. conditions for the cease fire; the United States says nuclear stockpiles and manufacturing equipment are being hidden from U.N. investigating teams; air strikes are threatened to resolve the situation.

Search Team) is a top secret elite unit that specializes in the location, recovery or destruction of nuclear weapons. The NEST team also combats chemical and biological warfare. Little is known about this special forces team except that it can be deployed almost anywhere in the world with little advance notice.

In 1990 an incident put the NEST team on alert. During a regional uprising in southern Soviet Union near the Iranian border, rioting dissidents overran a Soviet mobile nuclear missile site, killed the crew and drove away with an SS-20 missile. It is not known what happened to the missile, but there were clues showing it was possibly taken to Iran or Iraq. According to Pentagon sources, the stolen missile is not a threat, but the extent of actions taken to find it is not known. The whole incident is still highly classified.

Sometimes you can catch radio traffic concerning NEST activities on SAC's GCCS shortwave frequencies. See Table 1 for a list of NEST callsigns and buzzwords.

### Silk Purse Scrapped

Now that the cold war is over, some of the hardware that went with it is being scrapped. David Alpert of New York City sent in a clipping that states four EC-135H Airborne Command Posts based at RAF Mindenhall in Britain are being sent to the boneyard. The four aircraft known as Silk Purse have operated continuously since 1962.

During the cold war, these aircraft were on 24-hour alert should nuclear war become a threat. Now they and their support personnel are being deactivated in light of the easing of East/West

### DAVIS MONTHAN AFB FREQUENCIES


#### UHF FREQUENCIES

236.600 TOWER  
252.100 ANG  
253.500 DM TOWER  
254.200 NORAD ARIZONA PETE  
257.800 \* TIA/DM/ANG APPROACH DEPARTURE  
276.800 A-10 OPS  
295.900 ANG AIR TO AIR  
297.200 ANG CHANNEL 5 TOWER  
318.100 \* TIA/DM  
352.700 DM REFUELING POOL  
359.300 EMERGENCY APPROACH  
364.200 NORAD ARIZONA PETE  
372.200 MAC FLIGHTS  
390.800 AF CONTROL TOWER  
393.000 DM TOWER  
363.800 TIA/DM APPROACH

#### BASE OPERATIONS FREQUENCIES

163.000 FLIGHT LINE SECURITY  
164.9875 BASE SECURITY  
173.4375 MOTOR POOL  
173.5875 CRASH/EMERGENCIES  
163.5875 CIVIL ENGINEERS  
149.550 RAYMOND 8 TAC COMMAND POST

\* TUSCON INT. AIRPORT/DAVIS MONTHAN SHARED FREQUENCIES

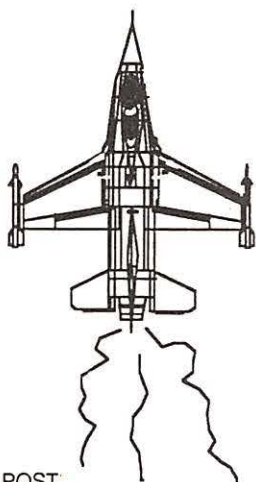


Military monitors need to keep a close ear to their receivers. It was monitors like you who helped inform the world when hostilities broke out during Desert Storm. Stay tuned. It might happen again.

### Out of the N.E.S.T.

If action is taken against Iraq it will probably be covert. The exploits of special forces or "teams" during Desert Storm are only now coming to light. Navy Seals and Air Force Rangers were deployed with great success in Iraq.

But if the action involves the hunt for nuclear weapons, a little known tactical team would likely be deployed. NEST (Nuclear Emergency



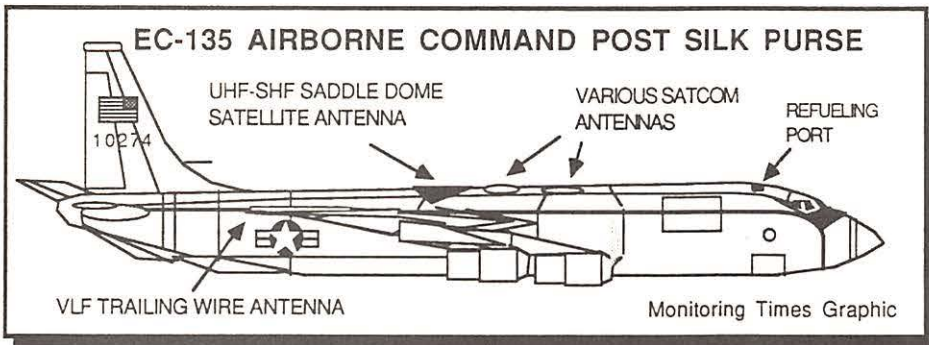

tensions since the fall of the Berlin Wall. Utility World has more details on the decision, but we thought we'd take a last look at these specially outfitted Boeing Stratotankers in the accompanying graphic illustration.

## Mailbag

• Robert Brock from Phoenix, Ariz., sends along a great list of frequencies from Davis Monthan AFB. The base is located in the southeast corner of Tucson, about 10 miles from Tucson International Airport.

One of the unique features of Davis Monthan is its huge aircraft boneyard where thousands of WW II and Vietnam era aircraft are stored,


scrapped and kept in reserve. Occupying over 2,300 acres and 13 miles of perimeter, old aircraft are stripped of their usable parts, covered with white protectant putty and left to stand in the arid Arizona Desert. Planes ranging from B-52 bombers to Navy helicopters all end their useful lives there.

• Also based at Davis Monthan are A-10 Warthogs of the 355th Tactical Training Wing and the 868th Tactical Missile Training Group, responsible for training Air Force members to operate, maintain and defend the Ground Launched Cruise Missile System. See Table 2 for excerpts from Robert's list.



Vintage Korean War aircraft such as this F-86 are stored at Davis Monthan AFB. Many, like this one, are converted to fly by remote control and serve as targets for Air Force combat training squadrons.

## BOOST RECEPTION

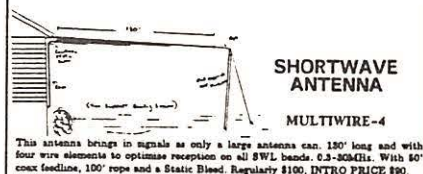

APARTMENT DWELLERS DREAM ANTENNA!



Hear signals from every corner of the globe! Weak DX stations come in strong! Big performance and compact size!

Works like a large antenna and "peaked" for optimum short-wave reception. COVERS ALL SHORT-WAVE BANDS (0.3-30 MHz). Strong signals with internal 16-22 db amp. Low noise and built-in low pass interference filter. Works with 5 to 30 ft "low profile" antenna wire (supplied). 117VAC powered. Cable to rcvr NOW INCLUDED (specify connector). ANTENNA PLUS-2 \$90 Scanner and Wide-Band models also available. Call/send for details!

## SCANNER STICK


Great Scanner Reception!

Covers all scanner bands 25-1200MHz. Only 35" long but picks up signals like a vacuum! Ruggedly housed inside a PVC tube it withstands weather that would tear other antennas apart! 25' Record only the "ACTION" coax included with either on your cassette recorder, BNC or Motorola conn. Connects scanner to recorder. For mains up to 1.5" dia. 117VAC or 9V batt versions available. Easy connection! TAPE SAVER TS-1 \$60!



Listen to entire nights scanning in minutes! Record only the "ACTION" coax included with either on your cassette recorder, BNC or Motorola conn. Connects scanner to recorder. For mains up to 1.5" dia. 117VAC or 9V batt versions available. Easy connection! TAPE SAVER TS-1 \$60!

NEW! SUPER SCANNER STICK. Amplified version with 16-22db gain! ONLY \$80



Continuously US shipping/handling \$5 AK, HI, PR, Canada shipping/handling \$8 NY and MI residents add local sales tax

MANY MORE PRODUCTS! SEND FOR DETAILS!

ELECTRON PROCESSING, INC. BOX 68 - MT CEDAR, MI 49621

(616) 228-7020

## Computer Control of Your Radio

### with SCANCAT

Computer Aided Software control of:  
Kenwood R-5000 & TS-440  
Yaesu FRG-9600 & FT-757GX  
NEW !! NRD-525



NOW! AOR-3000 with SPECTRUM ANALYSIS

Greatly enhance all your radio's functions with software control. PLUS our program includes a built in terminal program for your TNC. Pop-up menu windows and help screens. Fully menu driven and user friendly. Supports color & B&W monitors. Log found frequencies to disk files (Auto Log with AOR3000 !!!), complete with descriptions. Up to 500 frequencies per file. Unlimited disk files that save Description, mode and comments of each frequency. Scan disk files or between frequencies with variable delays and programmable step rates. Search disk files by descriptions, programmable lock outs. 30 programmable presets accessible by a single keystroke. Requires MS-DOS, 1 serial port & interface (not included).



\$49.95 PPD



Visa - Mastercard or COD Includes "top200" Frequency file N/C

Fully operational demo \$5.00 (refundable with purchase)  
J & J Enterprises- 4001 Parkway Dr. - Bossier City, LA 71112  
ORDER DESK - PH. 318-631-3081 (10-5 Central)

**SATELLITE TV BUYING GUIDE**

CALL FOR

**SATELLITE TV**

**NAME BRANDS AT 50% DISCOUNT**

This FREE 24 page Consumer Buying Guide tells all about Satellite TV and lists guaranteed lowest prices.

Satman, Inc.  
6310 N. University No. 3798 • Peoria, IL 61612

**1-800-472-8626**

Tell them you read about it in MONITORING TIMES.



## Navtex: Direct Printing Navigational Warnings

As part of the Global Maritime Distress and Safety System (GMDSS) the navtex service has been introduced as a way of keeping ships at sea up to date with weather, navigational and other warnings. All navtex stations operate on 518 kHz with the ship's receiver acting as a direct printing SITOR receiver.

The ship's receiver automatically prints out the messages which it receives, and keeps track of them so retransmissions of the same message are not printed more than once. The advantage of this system is that a radio officer or navigator does not have to sit through a broadcast of notices he has already heard in order to get the ones he hasn't. The new messages will simply be printed automatically on receipt. If the messages get lost, then the receiver can be reset to print all messages received and then begin screening out received notices once again.

With the navtex receiver it is also possible to select which types of messages are of interest to the vessel and ignore the rest.

Currently there are 14 stations offering navtex service as shown in Table 1. The origin of each navtex message is indicated by the identifier code; the regular radio call sign of the station is not used.

When the complete message is printed it begins with ZCZC which is the commencement signal for telex. Next comes a four-character group AB## where A is the station identifier from the list in Table 1, B is an identifier for the type of message (Table 2) and ## is a serial number for each message. The serial number is assigned beginning with 01 for each type of message from each station. The serial number 00 is used under special circumstances.

Next a carriage return and line feed is sent and the actual message follows. The end of the message is signalled by NNNN. If there are more messages being sent by the same station they will follow the first.

Here is an example of a navtex message.

ZCZC AA12  
No. 276  
AN OLD UNCHARTED WRECK IN POSN  
26-55N 080-03W IS A HAZARD TO NAVI  
GATION DUE TO SHORELINE EROSION.  
PARTS OF THE VSL ARE EXPOSED JUST  
BENEATH THE SURFACE.  
BT  
NNNN

From looking at the list of identifiers, the first A indicates the message came from Miami, Florida. The second A indicates the message is

**Table 1: Station Identifiers**

Miami, FL	A
Portsmouth, VA	N
San Juan, PR	R
Boston, ME	F
New Orleans	G
Sydney, NS	K
Bermuda	B
Long Beach, CA	Q
Astoria, WA	W
Kodiak, AK	J
Adak, AK	X
San Francisco, CA	C
Honolulu, HI	O
Guam	V

a navigational warning and this is the 12th from Miami.

If you have a SITOR reader, give navtex a try. There is interesting information to be had for the reading.

### More on CW

Two items recently arrived in the mail which give the appearance of being nails in the coffin of shipboard CW. The first, sent by Dick Dillman in San Francisco, was a copy of a U.S. Notice to Mariners announcing that due to the planned "phase down" of their navcommstas, the Naval Computer and Telecommunications Command will discontinue its Hydrolant warnings sent via CW transmissions. The stations which will no longer be making these CW transmissions are: Norfolk, VA; Key West, FL; Thurso, Scotland; and Rota, Spain.

On the surface this notice appears to indicate that even the U.S. Navy is dropping CW. However, the notice does indicate that Navarea IV warnings which are currently given in HF CW transmissions will continue. Since CW transmissions themselves are not being discontinued, it seems more likely this change is a result of automation rather than a deliberate discontinuation of the use of Morse code. In a future column I will try to elaborate on this information.

The second item concerns a report from W5YI who mentions the FCC is relaxing its requirements for ships to carry radio officers with proficiency in Morse code. Passenger ships under 100 gross tons may now operate under a general exemption from the requirements for a radio

**Table 2: Message Types**

A	navigational warning
B	meteorological warning
C	ice report
D	search and rescue information
E	meteorological forecast
F	pilot message
G	DECCA message
H	LORAN-C message
I	OMEGA message
J	Differential OMEGA message
K to Y reserved for future definition	

station with manual Morse code when operating beyond 100 nautical miles from shore.

It must be remembered that a passenger ship of 100 gross tons or less is not, by any means, a large ship. While I do not know how many vessels will qualify for this exemption, it certainly will not have an earth-shattering effect.

While there has been considerable doom-saying regarding the fate of Morse code, one thing which has been overlooked is the fact that in the reorganization of the marine HF bands which just took place, very few changes were made to CW frequencies. While it is true that more SITOR frequencies have been opened up, CW does not appear to have slipped quite as drastically as the popular press would have one believe.

While the GMDSS relies heavily on satellite communications, the final verdict has yet to be rendered as to just how effective a satellite communications system will be on a ship drifting without power. It is a well known fact that Morse code transmissions can be copied under very difficult conditions much more easily than any other mode. If any of the other modes proves more effective, then it will become the standard. In the meantime we will have to wait and see.

As I climb back down from my soap box, I hope you all enjoy your autumn listening and urge those of you who can to give navtex a try. Let me know if you succeed. I wish to thank Joseph D. Hersey Jr., Chief of the Marine Policy Branch of the U.S. Coast Guard, for providing me with valuable information on the navtex service.






# CQ Amateur Radio Buyer's Guide

You can buy with confidence when you have all the facts. The 1991 Equipment Buyer's Guide gives you in-depth coverage of HF/VHF/UHF rigs and accessories. All the information is here in one handy, concise directory with descriptions, technical specifications, model numbers, retail prices and photographs. How do you get a ham license? What's the latest on the code-free license? What equipment do you really need to work the satellites? Should you buy a computer for your shack? How do you add computer control to your rig? You can buy with confidence when you have all the facts. Order the 1991 Equipment Buyer's Guide today!

You'll need the Antenna Buyer's Guide to squeeze every last dB out of your antenna dollars. Make sure you get the best possible antenna system for the best price! HF and VHF/UHF, directional and omnidirectional, vertical and horizontal, mobile and portable—they are all covered in depth. Tuners, cables, wattmeters and more! You'll find detailed charts, specifications, photos and retail prices. Advice on getting the proper tower and antenna permits from a leading authority on PRB-1. Step-by-step guide to putting up your first beam! The bands are hotter than ever right now. You can't afford to wait.

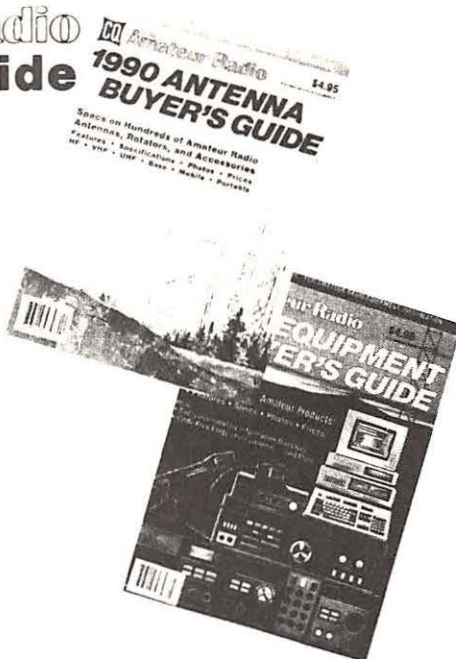

## ORDER YOUR BUYER'S GUIDE TODAY!

Don't miss the single most valuable buying guide in the Amateur Radio field. Send only \$4.95 today. Foreign: \$6. U.S. funds. Foreign orders are payable in U.S. funds only by check drawn on a U.S. bank, or by U.S. Postal Service Money Order.

YES, please send my copy of 1990 EQUIPMENT BUYER'S GUIDE for only \$4.95 (Foreign \$6.00) postage paid.

Date \_\_\_\_\_ Number of Copies \_\_\_\_\_

Name \_\_\_\_\_ Call \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Card No. \_\_\_\_\_ ☐ Check ☐ MasterCard ☐ VISA ☐ Expires \_\_\_\_\_

Signature \_\_\_\_\_


(Signature required on all charge orders)

Mail to: CQ Communications, Inc.

76 North Broadway, Hicksville, NY 11801

## Improve Your Scanning Coverage!

GRE America is proud to introduce a new family of products to enhance your scanning pleasure! First, GRE has designed the new **Super Converter 9001** for base model scanners. The 9001 converts 810 MHz - 950 MHz down to 410 MHz - 550 MHz. The 9001 is the perfect alternative to buying a new, expensive scanner covering the 800 MHz band. Next, GRE announces the new **Super Amplifier 3001** for base model scanners. The 3001 will increase gain by as much as 20 dB, and is engineered to help scanners with low sensitivity pull in weak signals. Both products use BNC connectors, (1) 9 volt battery and have an off/pass switch for returning to normal operation.

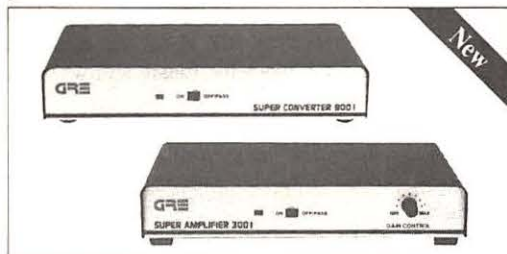

Super Converter 9001 & Super Amplifier 3001



Super Converter II



Super Amplifier



All-Band Antenna

U.S. & International Distributorship inquiries welcome. Please call GRE for further information!

## Let GRE Manufacture Your Radio Products!

GRE America, Inc. is a leading OEM developer and manufacturer of radio telecommunications products such as:

- Cordless Telephones
- CB & Marine Radios
- Spread Spectrum "engines"
- Remote Monitoring Systems

If you need a high quality, cost competitive, reliable manufacturer, GRE will provide you with a free production quotation.

For more information, please call GRE at (800) 233-5973. GRE is a subsidiary of General Research of Electronics, Inc.

**GRE** GRE America, Inc.

GRE America, Inc.

425 Harbor Blvd., Belmont, California 94002

(415) 591-1400 Outside California: (800) 233-5973



## The Thistle and Shamrock



If the Celtic people of Ireland, Scotland, Wales, and the peninsula of Brittany could be said to have an ambassador to America, it would probably be Fiona Ritchie. For an hour every week she shares a wealth of music from her hometown of Edinburgh, Scotland, with the listeners of 227 National Public Radio member stations across the country each week. "The Thistle and Shamrock" is the most widely carried music program NPR offers. For over eight years, Fiona and her staff have charmed millions of listeners with the sounds of fiddles, accordions, drums, whistles, guitars, bagpipes, and ancient Celtic instruments. Its popularity continues to grow.

"We hear from people of all extractions. We hear from Native Americans, Afro-Americans, oriental people, people of Germanic extraction. You name it. One of the most common types of letters we get starts with the phrase, 'Although I don't have a drop of Celtic blood in me . . .,' and then it goes on to say how much they enjoy the show."

Until recently, Fiona produced all of her weekly broadcasts at the studios of WFAE in Charlotte, N.C. Charlotte is the home of the University of North Carolina attended by Ms. Ritchie as an exchange student. After she returned to Scotland to finish her college degree, Fiona migrated back to Charlotte not knowing she was about to begin a career in broadcasting.

"WFAE had just signed on the air with a new station and they were looking for volunteers to get involved with this new public radio affiliate. It sounded to me like a really fun idea. I went down there to see if I could volunteer and I got involved in all sorts of tasks. Before too long they asked me if I would like to host a program of music from where I was from and I got a chance to do that. I got a start as a volunteer without any previous experience in broadcasting."

Although "The Thistle and Shamrock" is always pre-recorded, Fiona insists on retaining the intimacy of a live show. Only one show is done at each recording session, no more than a few weeks in advance. This allows new music releases quick exposure and retains the im-

mediacy of the content. Artists on tour are regularly interviewed and featured on "Thistle" during their stay.

"I always try to do it like a live radio show. I started out as a host on a local station and worked live and I wanted to keep that sense about what I do even though the program is recorded. I'm now producing 'Thistle' in a small commercial studio in the heart of Edinburgh. When I'm in Charlotte I still have access to the studios of WFAE, which is my radio base over here. That's great because I can do the show wherever I am."

Over the years, Fiona has broadened the scope of her show beyond a rigid format of traditional Celtic instrumental recordings. "That's partly because the music itself has continued to grow over the years I've been doing the show. I've been doing it nationally now for eight years, and during that time we've seen the emergence of a lot of crossover music. People like Maura O'Connell and Mary Black, who became known for singing traditional Irish music, but who have voices which can attack a whole variety of material. They bring that Irish sensibility to whatever they do...I'm trying to melt the boundaries down a little and explore where Celtic music meets other forms of music and where it fits into the world of music in general."

Music may be the guiding spirit of Fiona's soul. "I grew up with Celtic music around, but there was also lots of other kinds of music in the house. I didn't ever study or train in music. I would consider myself someone who dabbles in it a bit and enjoys it a lot."

Performers all over the Celtic world and beyond appreciate Fiona's efforts to increase awareness of their music. One by one they are beginning to share "The Thistle and Shamrock" as a way to greet people of the new world.

"My move back to Scotland was in part so I could gather more interviews by being over there. It also enables me to move over to Ireland much more easily now than before. In the past, when I would go home I would always end up being in Scotland with my family and friends and rarely would I get to travel around as much because I wanted to see them. Now that I'm based over there, I'm getting a chance to visit some of these other places whose music is represented on the show."

A large audience and widespread distribution make "Thistle" the primary place to find Celtic music on the radio. When performers journey from Scotland or Ireland to North America, they immediately recognize the program's significance. "Many people in their audience will come up and tell them they first heard them on 'Thistle.'"

Fiona has twice combined her love for broadcasting and gone on tour around the United States. She brings the show to her listeners live,

and introduces them to some Celtic performers, as well. "There are many artists who we've featured on the show. It's been a good symbiotic relationship; 'Thistle' has grown and their careers have grown. We've all worked hard for the music and watched it grow into a larger body."

The show is able to go on from year to year with a patchwork quilt of funding sources. National Public Radio provides grants that assure "Thistle" will stay on the air. "In addition to that, we sell tee-shirts and souvenirs and we have a newsletter people can subscribe to. It enables them to learn about what's coming up on the show. We do articles about different artists and different aspects about the music."

Over a thousand letters are received every week, each with a personal comment, suggestion, or a simple thank you. Through her mail and tours, Fiona has developed a congenial rapport with her audience. Her vision of them is endearing. "They are very warm and very interested, enjoying the program and loving the music."

Some of her fans are quite famous. After doing the show for only a couple of years, Fiona received a letter she treasures. "I picked it up and said 'Joan Baez! Wait a minute.' I went around to the record library and pulled an album of hers that just happened to have her signature on the liner notes and sure enough, it was from Joan Baez. It was great for me to hear from someone of that stature and know they liked the show."

James Taylor, Dolly Parton and Paul Winter all listen, but other people have a place in Fiona's memories, too. "We had a couple on their honeymoon who were fans of the show, and part of their itinerary was to come and visit us at WFAE. On my tours I would meet people who would travel hours to come to the shows and it was great to hear them talk about the circumstances of learning about the music and what it meant to them."

For more information about "The Thistle and Shamrock," send a self-addressed stamped envelope to P.O. Box 560646, Charlotte, N.C. 28256.

### Bits 'n' Pieces

• Don Ho might soon be heard back to back with Quiet Riot on the new Radio Free Hawaii in Honolulu. KDEO-FM now depends on its listeners to program the station. Anyone can drop into a variety of different stores in Hawaii and vote for their favorite songs. Every week the votes will be counted and Honolulu's 36 most popular songs will be played in heavy rotation on KDEO along with 300 other requested favorites to create the most eclectic format on the air.

Radio Free Hawaii was created by Norm Winter, who runs a chain of comic book and record stores, as a cross-promotional vehicle to



## Be an American BandScan Reporter.

See any stories about radio in the local paper? Send them to *Monitoring Times*, PO Box 98, Brasstown, NC 28902.

promote the radio station and his business. "Anything goes," says Winter. "I don't think anybody who's ever had any programming experience would do something like this."

KDEO is licensed to Waipahu, Hawaii, a Honolulu suburb. Look for their big 60,000 watt signal on 102.7 FM.

• Summer will soon be over and the beginning of the AM radio DX season will follow. Look for new and unusual stations all over the dial, especially at sunrise and sunset. Many stations change their operating powers and directional patterns every dusk and dawn to compensate for changing band conditions. You might hear half a dozen stations on one frequency in an hour if you're lucky.

You can also DX the AM broadcast band with a shortwave radio. Occasionally, a radio station's transmitter will be mistuned allowing second or third harmonics to be heard for thousands of miles. Recently, CHRS 1040 kHz from Montreal was heard clearly on 2080 kHz all over the East Coast. WXGL, 1240 kHz, Lewistown, Maine, shows up on 2480 kHz and look for WVIP, 1310 kHz in Mount Kisco, New York on 2620 kHz. AM's second harmonics may be heard from 1620 all the way up to 3200 kHz and are able to skip just like shortwave, so happy hunting.

Also check 26.450 MHz for WLW 700 Cincinnati, Ohio's unusual FM transmitter used for remote broadcasts. You'll hear their regular programming interrupted by cues from their studios, or live programs without commercials, for example. Using a CB antenna, Jean-Luc Fradet in Deols, France, often hears it with strong signals.

## Mailbag

This summer's mailbag has been stuffed with FM and TV DX catches. Many stations from Cuba, Bahamas, Dominican Republic and Haiti were logged across the U.S. via single and double hop E-skip. Mike Riordan in Goleta, CA., near Santa Barbara, heard a multitude of stations from New Mexico and Texas completely override his local FM broadcasters. Many viewers of WCBS-TV, Channel 2, in New York City often saw WPBT, Miami, FL., or WBRZ, Baton Rouge, LA., instead of their local favorites. Jeff Plotkin watched "Doogie Howser M.D." and "Cheers" via Newfoundland's NTV on channel 6 with a pair of rabbit ear antennas in his Brooklyn apartment. It was a surprise almost every minute.

A powerful new AM station is going on the air near Phoenix with possible call letters KCCF. Associate Pastor (and *MT* reader) Joseph W. Cejka III of the Community Presbyterian Church of Lake Havasu City, AZ., reports that 1100 AM will soon be the home of a big 25,000 watt signal from Cave Creek just outside of Phoenix. It will be the second most powerful signal in the valley right behind KCWW on 1580 kHz operating at

the maximum permissible power of 50 kilowatts.

Phoenix is also the home of the Sun Sounds Radio Reading Service. Delivered by SCA

subcarriers of FM radio stations in Phoenix and Tucson, Sun Sounds brings the world to sight-impaired listeners with special SCA radios. The service can be heard throughout the state of Arizona over the air or via cable FM providing news from local newspapers and shows about business, entertainment, cooking, health, romance and raising children. For more information call 602-231-0500.

## New Station Grants

Somehow they managed to squeeze a few more stations onto the broadcast bands. Here's where you'll find them. Warrior, AL 98.7; Hot Springs Village, AR 92.9; Dover, DE 91.7; Princeville, HI 98.9; Churubusco, IN 96.3; Fairfield, IA 90.5; Madisonville, KY 106.9; Lake Charles, LA 105.3; Burnham, PA 96.7; Dresden, TN 95.1; Madisonville, TN 99.5; Amarillo, TX 105.7; Salt Lake City, Utah, 88.3 and White Stone, VA 100.1. Courtesy of the *M Street Journal*.

## For Sale

You now have the opportunity to buy a 25 percent interest in a Class B FM radio station in the middle-Atlantic states. The current owner needs to sell his share because of poor health. This area is known for its hunting and fishing and its firm potential for solid audience growth. Asking price is \$100,000 with half down and half to be paid over a long term. Call 804-787-8674 for details.

A one kilowatt AM station on 940 kHz is priced right for a new owner/operator. Located in southwest Missouri, it would make a perfect situation for a retiree, or someone beginning their career in radio management. Galen Gilbert awaits your call at 817-380-0229.

A Class A FM in southeast Georgia now has a chance to move its transmitter into Florida and become a part of the valuable Jacksonville market. A power upgrade to six kilowatts has already been applied for at this 18-month old station. The owner is retiring, itching for a quick sale. Every month of operation has been profitable and sales continue to grow. Call Jack Mays at WOKF-FM, 912-496-3511.

## International Bandscan

• Radio is about to change dramatically in Africa. World Space Corporation of Washington, D.C., has been granted an experimental license to operate the AfriStar I radio broadcasting satellite. AfriStar I will begin transmitting 36 digital stereo program channels by the end of 1993 all

## COMMUNICATION

### AT ITS BEST

AR-1000XC \$399, AR-2800 \$419, AR-3000

\$895, BC100XLT \$215, BC200XLT \$269

We also sell a variety of CB's, Radar Detectors, Phones, Answering Machines and Accessories.

For orders call: 1-800-33 TURBO

Free Shipping



**TURBO ELECTRONICS**

P.O. Box 8034

Hicksville, NY 11802-8034

Questions welcome (516) 938-1946

across the continent. Africans will be able to listen using new Starman receivers priced under \$100 each. The system will provide paging, fax service and electronic mail.

Noah Smara, chairman of World Space, hopes to sign programmers now relying on conventional broadcasting to his unified high tech system. "Programmers such as CNN International, Egypt Radio, Radio Orient and Africa One can uplink directly to the satellite from many locations. Samara confirmed the Starman receiver line will include auto, home and handheld models, all with very modest price tags.

• Sometimes old tech lends itself to new high tech schemes. Japan has just announced the selection of Motorola C-Quam AM stereo as its national standard.

In an age where digital radio is becoming a reality, there are still great sums of money to be made using established technology. The Far East is still dominated by far-reaching AM radio stations, and the Japanese are trying to continue interest in the stations by making them more desirable with stereo broadcasts. With a potential audience reaching into the billions of people, a large demand for AM stereo radios could translate into big profits.

By selecting one system as a standard, the receiver manufacturers should see this as an incentive to begin mass production of AM stereo radios. Or should they? Leonard Kahn, inventor of Motorola's rival, the Kahn AM stereo system, is still in litigation with the large conglomerate. Kahn claims his patented circuitry designs are being infringed upon by Motorola.

Unless Motorola settles with Kahn, no C-Quam AM stereo radios can be sold in Japan. Japanese AM stereo is on hold for the foreseeable future.

## Credits:

Many thanks to Margaret Kennedy and Fiona Ritchie, readers Malcolm Kaufman, Ron Carruthers, Mike Riordan, Jeff Plotkin, Joseph W. Cejka III, *Broadcasting Magazine*, *The M Street Journal* and *The Arizona Republic*. Until next month, happy trails.





# A TVRO Monitor's Paradise

On a recent trip through Atlanta, Georgia, it was my good fortune to run into Bill Howard, an *MT* reader and engineer at the Turner Broadcasting uplink site in Atlanta.

Bill, known on the ham bands as N4MU, rolled out the red carpet and allowed me the opportunity to glimpse into his workday at what can only be called a satellite TV monitoring paradise.

Of course, the business at the site is not the enjoyment of the hobby but the very serious business of uplinking to Galaxy 1 the signals from the various Turner Broadcasting enterprises. It's here that TBS Superstation, CNN, Headline News and Turner Network Television are beamed 22,300 miles away to the satellite. This signal, in turn, finds its way to thousands of cable systems representing tens of millions of viewers, to say nothing of the several million backyard dish owners.

## Career Monitor

Working at the uplink site seems a natural progression for Bill Howard. Before moving to Atlanta, Bill had worked for the FCC at their monitoring station in Ft. Lauderdale, Florida, but the work lacked the stimulation his engineering abilities required.

The frenetic pace of CNN has given Bill a tough technological challenge and he appears to be just hitting his stride. "Most of the time around here it's routine," he says. But when things start popping he and the rest of the engineers really earn their pay.

## Uplink Site

Compared to the impressive CNN Center headquarters downtown, the uplink facility is small. Here a nondescript cinderblock building, surrounded by satellite dishes of every size and



*The transmitter room at the CNN uplink is cool and spotless, their moms would be proud! Inset: Bill Howard, N4MU, in the control room at the CNN uplink.*

pointing in every direction, houses the actual C and Ku band transmitters, antenna switches, receivers, batteries and computers it takes to keep everything on the air. And, simply put, it's the job of Bill Howard and his colleagues to be sure it stays on.

Some 30 dishes, ranging in size from three feet to 33 feet are clustered in a space of only a few acres. As we walked among them in the blistering Georgia heat, Bill pointed them out.

"That's the 11 meter Pacific feed which double hops to feed the western Pacific, Japan, Australia and all," he said. He pointed to numerous others as: "The Intelsat feed, the G.I. authorization data, that one's going to Westar 5, that's for Galaxy 2 and that one over there feeds Panamsat." Pointing out a small dipole on top of the flat roof of the building Bill explained, "That's for WWV. All of our equipment is set for their time."

I noticed an extension ladder disappearing into the mount of the big 11 meter G1 dish. "Every morning at 3 a.m. we go up that ladder and hand-adjust the mount for the one degree shift." This was at the end of June when Galaxy 1 was being moved east one degree over a one week period.

In the center of the control room was an L shaped console with two office chairs for the duty engineers. Built-in to the console was an impressive array of lighted switches, phones, CRT displays for monitoring any given transponder: audio or video, and a special 19 inch studio monitor. This was an all-mode monitor capable of receiving any format transmission: PAL, SECAM or NTSC.

"We can put any transponder from any satellite on this monitor." To emphasize the point he pressed a few buttons and brought up Soviet programming on one of their Gorizont satellites. Considering the fact that the bird was only five degrees off the eastern horizon and the dish was considerably out of the footprint, the picture was excellent.

Among the rest of the gear were SCPC (Single Channel Per Carrier) receivers for monitoring the various audio services such as CNN radio. Small green CRT displays dotted the walls which displayed the signal characteristics of the specific transponder to which a receiver was tuned. Occasionally, a bell would sound or a light would flash and Bill would make a technical adjustment without interrupting his thought. It was, as he had said, routine.

## Double Redundancy

Leaving the control room we went to the transmitter room which was again packed with rack mounted gear in long rows. Innumerable pieces of electronics were stacked from floor to ceiling. Countless LEDs flashed and lighted meters bounced as the sound of a powerful rush of cold air from a massive air conditioning duct forced Bill to raise his voice to be heard. "All the transmitters have backups," he shouted.

In the power supply room he pointed out that everything could be powered by this roomful of large Exide batteries which were "floating." In the event Georgia Power should fail, these batteries would take over until their own on-site

"Satellite TV" editor Ken Reitz can be heard every Wednesday evening from 9-11pm Eastern Time on Spacenet 3, Channel 21, 6.20 MHz audio. Call the phone number announced on the air and share your TVRO experiences with the rest of North America.



generators would kick in. "This happens occasionally when lightning knocks out the power company," Bill explained. "You would never notice the switch from Georgia Power to our generators. It's that fast."

There were back up generators, back up batteries and even a back up for the built-in fire extinguishing system. This system of redundancy reflects the priority shared by everyone involved at CNN for getting out the news.

## Hazardous Duty

On one large bulletin board were tacked photos taken by the various engineers who found themselves setting up the CNN "Fly-away" portable uplink in some very precarious circumstances. Here was the ubiquitous CNN dish in front of the Berlin Wall as it crumbled, in the public square in Prague during the democratic revolution, and there was my host, Bill Howard, in Riyadh, Saudi Arabia, and in Kuwait City during the recent Gulf War. Bill spent some 70 days in the Gulf and was one of those whose work made it possible for the rest of us to see the war as it happened.

In another section of the building, carefully packed in metal shipping containers the size of suitcases was the very same Fly-away which saw service in the Gulf. As we watched the monitors in the control room the news from Yugoslavia was not encouraging. It was easy to imagine in a matter of days those shipping cases wouldn't be there and Bill Howard or one of his colleagues would be off again.

## MAILBAG

• Rene Matthijssen, VE6WCA, of Edmonton, Alberta, Canada, writes of his progress in finding his dream QTH (location). He and his wife have purchased 20 acres "... in an interference-free location, close to Edmonton ... I will build a large garage/workshop to do my satellite communication experiments." Rene, you are the envy of many hams, SWLers, and TVRO hobbyists. We hope you'll keep us posted on your progress.

• For those plagued by zoning regulations or simply trying to please the neighbors, Alfred Fossum of Fall River, MA sends this interesting idea for disguising a satellite dish. There is a product which is manufactured specifically for the backyard dish market which turns your dish into a massive patio umbrella under which you may put a table and chairs.

The product is from a company called Under Cover Satellite Systems of Indio, CA. The systems are said to fit these dishes: Winegard 7.5 foot and 10 foot Quadstar, Unimesh 7 foot and 10 foot, Kaul-Tronics 7.5 foot, Paracclipse 8 foot Hydro, Channel Master 7.5 and Orbitron 8.5 foot. For information on dealers near you call 619-775-9962.

**Order Your FREE Skyvision Catalog Today**  
It's Loaded With Factory Fresh Satellite TV Products, "All At Discount Prices"  
**Call Toll Free 800-334-6455**  
International call 1-218-739-5231 Fax line 218-739-4879

- Complete Systems
- Upgrades
- 2 ft to 24 ft Dishes
- Parts
- Accessories



- Major Brands
- Factory Fresh
- USA Warranty
- Fast Delivery



### WORLD SATELLITE TV AND SCRAMBLING METHODS

**"The Technician's Handbook"**  
This thorough text is a must-buy for technicians, satellite professionals and curious do-it-yourselfers. The design, operation and repair of satellite antennas, feeds, LNBS, receivers and modulators are examined in detail. An in-depth study of scrambling methods and broadcast formats including the VideoCipher II, Oak Orion, FilmNet, Sky Channel, EuroCipher, D2 MAC, BSB and Teleclub Payview III. Circuit and block diagrams of all components are presented and clearly examined throughout the handbook. This information is a prelude to the chapters on troubleshooting and setting up a test bench. This expert guidance on testing, servicing and tuning is complemented by a wealth of detailed illustrations.  
340 pages, 8 1/2 x 10 3/8 over 200 photos, diagrams, wiring schematics and 16 tables / appendices / index  
S&H \$5 (U.S.) \$39.95



**THE SKYVISION DO-IT-YOURSELF INSTALLATION VIDEO**  
"Now You Can Watch It Being Done"  
Installing or "Tuning up" your satellite system made simple.  
VHS or Beta... S&H \$3 (U.S.) \$33.95



**ORBITRON Mesh Dishes**  
"Quality Demonstrated by Performance"

7ft	dish & polar tracking mount	\$239
8.5ft	"	299
10ft	"	349
10ft H.D.	"	439
12ft	"	699




ACTUATORS		
18" Superjack II	S&H \$14	\$89
24" Superjack XL ball	" 15	139
24" Venture acme	" 15	129
51" JGS acme	" 22	219

## Satellite TV Anywhere



**TUNE YOUR DISH TO ITS MAXIMUM!**  
"With The Pico" Signal Meter



A must for the serious dealer or satellite system owner. Saves time, frustration and money. Use when installing a new system, moving your dish, re-alignment of a dish that has been moved by wind, frost heaves etc., gets you right on the satellite belt for the best possible pictures!  
Pico signal meter S&H \$6 \$89.95



**PowerStar** (5' x 6' x 17")

### Plugs Into Your Lighter! Runs Appliances

NOW, house current from your car/truck/RV/boat... without a generator! When the power fails, run an extension cord into the house and plug in the lamp and the TV. Also great for camping trips, tailgate parties and outdoor chores. Don't get caught in remote places like Alaska etc. without your Camcorder and PowerStar power converter.

Input: 10-15 volts DC  
Output: 115 volts AC true RMS  $\pm 5\%$   
Frequency: 60 Hz  $\pm 2\%$   
Protection: Automatic overload shutdown & recovery  
Power: 400 watts peak, 200 watt for two minutes minimum, 140 watt continuously  
#POW200 S&H\$6 Was \$149 NOW \$129

### IRDs / RECEIVERS / SYSTEMS

"Save \$\$\$ on Packages"  
System package Includes: ORBITRON 10 foot mesh dish, 40degree LNB, 18" Jack Arm, Feed-horn and Receiver/IRD (VC lipulps decoder) of your choice, plus a FREE detailed installation Video

IRD/Receiver	System
UNIDEN UST2200 (Receiver)	\$219
UNIDEN UST9000 (Receiver)	\$459 \$999
UNIDEN UST9900 (IRD)	\$1025 \$1549
UNIDEN UST4200 (slave recv)	\$769
UNIDEN UST4400 (IRD)	\$967 \$1499
HTS V (IRD)	\$1099 \$1639
HTS VIII Plus (IRD)	\$1255 \$1798
HTS X (IRD)	\$1449 \$1989
MONTEREY 90 (IRD)	\$1869 \$2399
MONTEC 100C (Commer) (IRD)	\$1639 \$2159
DRAKE ESR324b (Receiver)	\$239
DRAKE ESR924 (Receiver)	\$599 \$1149
DRAKE ESR1024 (IRD)	\$1037 \$1587
DRAKE ESR1224 (IRD)	\$1165 \$1699
DRAKE ESR1424 (IRD)	\$1369 \$1899
ECHOSTAR 3000 (Slave recv)	\$788
ECHOSTAR 4000 (IRD)	\$899 \$1449

Just a partial listing of hundreds of products listed in the Skyvision catalog. Ask for your's today!

Send in coupon or call toll free

2052 College Way Fergus Falls, MN 56537 - Toll Free 800-334-6455

Mail in coupon or call Toll FREE today for the SKYVISION Satellite TV Product Catalog

Delivered free to your mail box in U.S. and its holdings.

\* International requests add \$8.00 to cover shipping and handling.

☐ Send Skyvision Satellite TV Products Catalog

Name \_\_\_\_\_ Phone ( ) \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

**Install A System, Upgrade & Repair Yourself And Save \$\$\$**

**All Major Credit Cards Accepted**

**Skyvision Inc.®**

• Many thanks to Steve Kimmel of Glendale, Arizona, for information about GM's plans to launch a massive system of VSATs (Very Small Aperture Terminals) to feed their 10,000 dealer showrooms. In addition this same issue of *Communications News* tells of a similar system for Volkswagen dealerships, 4,000 terminals for the Chevron Corporation and the Farm Credit Bank of Texas which serves the four-state area of Texas, Mississippi, Louisiana, and Alabama.

VSAT systems use a "hub" terminal which is usually a large 20 foot dish which gathers the

signals from the users in the field which transmit and receive on dishes usually in the three foot range. This is mainly two-way data although bigger systems can have audio as well.

Many large corporations have gone to VSATs to cut huge phone bills. A company's computers and phone lines can be connected via satellite with only a flat usage fee to the transponder lessee. The VSAT industry has been the biggest and quietest success story in the satellite industry for years.





## Making the Best of a Solar Storm

Propagation on the HF bands has been dismal, to say the least, over the last several months. While sunspot numbers have been high, violent solar flares and storms have made communications on the HF bands difficult to impossible at times. BUT...

### Be Happy and Smile

Because ... on the other hand, DX on VHF has frequently been enhanced during this same interval. This phenomenon is due to the intense ionization that occurs in the polar regions of the Earth during geomagnetic storms (i.e. solar flares). The heavy ionization allows reflection of VHF signals over distances upwards of 2000 miles.

The major difficulty of working DX via this mode called "Aurora" is that phone signals are often distorted and unreadable. Consequently most amateurs who take advantage of Aurora DXing do so using CW (and you thought it was safe to come out of the closet!).

Any multimode VHF rig of 10 watts (higher is better) or so coupled to a modest antenna will allow you to use this mode. Occasionally SSB communication will be possible, but expect to use CW for 90 percent of your Auroral contacts. A highly directional antenna is not required; simple three to six element Yagi or quad antennas will do the job during most openings. Aim the antenna north in the northern hemisphere; south if you are located in the southern hemisphere.

Signals will sound very raspy and be extremely wide; most of the time they will not be particularly strong, but always quite readable.

Aurora communications (also known as "backscatter") are sometimes possible as low as ten meters, although six and two meters are the bands most often affected.

Solar flares can occur at any time and the best way to keep tabs on what is going on is to listen to WWV at 18 minutes past the hour for the propagation report. When the A index is above 50 it's time to start looking for DX on VHF via Aurora..

### HF Mobile


Mobiling is a lot of fun, but it is more difficult for the average ham than VHF due to the larger antenna required. Few hams want to de-

stroy the trade-in value of their vehicle by whacking large holes in the body. And although most hams love having large multiple antennas mounted on the family transporter, their enthusiasm is seldom shared by all members of the clan.

The large hole problem is easily solved by the trusty bumper mount, assuming a bumper is available. When going this route, be sure the mount is securely grounded to the vehicle frame. Above all don't use a bumper mount on plastic bumpers! If the bumper is plastic then you will need to manufacture some kind of mount that attaches directly to the bumper mounting bracket or frame.

If you have a trailer hitch on your vehicle, you have the option of using something like the "Tenna Hitch" (see photo one). This device is available from most ham dealers at a cost of about \$35.00. Made of stainless steel it is attached under the ball of your trailer hitch and has proved to be a sturdy, reliable system.

Take a look at photo number two. Pretty nifty looking antenna isn't it? Works like gang busters, too. This is a "Lakeview Co." 40 meter mobile

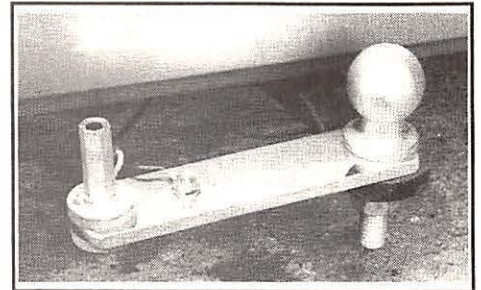

**Photo 1**

antenna. Designed and manufactured by WD4BUM, this slick mono band antenna is pleasing to the eye, easy to tune and inexpensive, to boot. Lakeview antennas are available for all bands from 75 to 2 meters.

The HF antennas are very compact; I carry antennas for 10, 15, 17 and 20 meters in the luggage compartment and still have room for everything we carry on vacation. With 100 watts to this antenna, solid QSO's with stations all over the U.S. and Canada are easy to make while traveling the highways of eastern Pennsylvania. The 20, 17, 15 and 10 meter antennas allow world-wide communications using the same rig.


Lakeview antennas are available at a cost of \$16.00 each (yes \$16.00) plus postage and handling from The Lakeview Co., RT. 7 Box 258, Anderson SC 29624, or call 1-800-226-6990.

### New Novice Class License

In February of this year, the U.S. established the first ever no code VHF amateur license. On July 1 of this year the United Kingdom established its first ever Novice license which requires the applicant to pass a 12 wpm code test!

The UK has had a no code VHF license for about 25 years. The general opinion of amateurs and officials in the UK has been that this class of license has not done very much to bring more people into the hobby nor encourage any great number to embark on careers in electronics/science.

This 180 degree phase difference in thought between the U.S. and our friends in the British Isles is somewhat dismaying! If neither plan

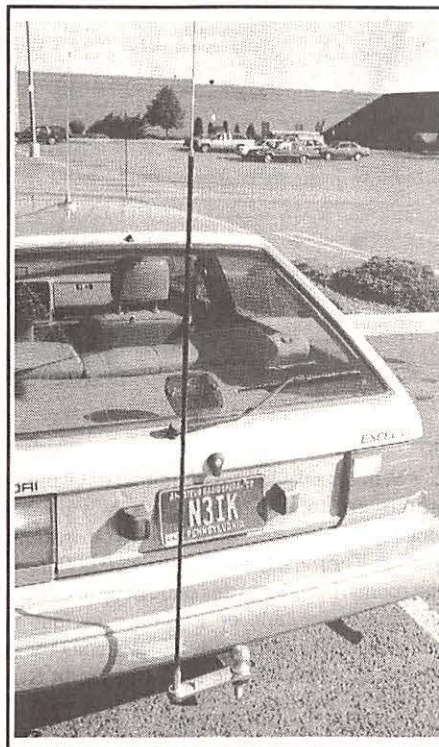

**Photo 2**



# Rob Paradise's

## Ham DX Tips

Now that summer is over and the "DX season" has begun, here are some DX targets to try for to see how well those antennae you (hopefully) put up this summer are working. You don't have to be a ham; SWL's should give them a try, too...

**ALASKA** NL7TB (John Reisenauer, 1961 Norene St., Anchorage, AK 99508) will be offering this DXCC country and "CQ Zone" (number 1) on either 21150 kHz or 7130 kHz CW +/- a few kHz due to QRM daily at 0200 UTC. He will be on whichever band offers the best propagation at that hour as winter approaches.

**AZORES** CU8AH is on 14195 kHz daily at 2130 UTC. QSL to: Jose F. Fernandes, R.S. Catarina 2, P-9970 Santa Cruz das Flores, Azores Islands, Via Portugal.

**BAHRAIN** CW fans can log this one on 21185 kHz at 1500 UTC most days. QSL to: Mel Livingston, P.O. Box 833, Manama, Bahrain.

**JAMAICA** For those who need this country on RTTY, look for station 6Y6JX on 14087 kHz +/- a few kHz for QRM at 1830 UTC. QSL's and reception reports go to: Jamaican Amateur Radio Assn., Red Cross Building, 76 Arnold Rd., Kingston 5, Jamaica.

**KAZAKHSTAN** RA9SB and several other Soviet operators will operate from here, having started in late August, til 13 September all bands SSB and CW, RTTY if they are able, putting UL7/ in front of their call signs (example UL7/RA9SB). QSL routes will be announced by the operators on the air, but they DO advise that you send reports with return postage and a self-addressed stamped envelope and NO call signs should be included on either envelope.

**NORTHERN IRELAND** GI4BBV (R.H. Willis, 11 Drumawhey Rd., Newtownards, CO Down, BT23 3RS, Northern Ireland, UK) is on 14085 kHz RTTY at 0500 UTC.

**PARAGUAY** ZP6CW is Doug Woolley, P.O. Box 73, Cacupe, Paraguay, and he can be found on or about: 21025 to 21035 kHz or 18070 to 18080 kHz from 2300-0000 UTC, and on the 30 meter band 10101 kHz from 0030 to 0115 UTC most days.

**SIERRA LEONE** 9L1US will remain here 'til late October, and if you would like to add this one to your logs, look for Dave on 24982 kHz SSB weekends at 1430 UTC. Reports go to Dave's QSL manager WA8JOC, Kenneth S. Scheper, 5875 Cedaridge Dr., Cincinnati, OH 45247.

**TURKS & CAICOS ISLANDS** VP5JM can be found operating RTTY on 21084 kHz most days at 0130 UTC. But, if you need her on SSB, she can be found on 14222 kHz at 0030 UTC. Weekends look for her on 10 SSB between 28400 and 28500 UTC. QSL to her manager: W3HNK, Joe Arcure Jr., P.O. Box 73, Edgemont, PA 19028.

**WALVIS BAY** V51P has been on 28485 kHz at 1215 UTC most days. Reports go to: P.O. Box 9080, Windhoek, Walvis Bay via South Africa.

73 de Rob

encourages newcomers to the hobby we will need to review the problem and approach it in a new manner. There is always the possibility that our respective views are both correct. Let's hope so!

## N4RVE

Steve Roberts is a ham on the move. Steve spent several years traveling around the country on a recumbent bicycle that he designed and built. Steve's bike carried ham gear, satellite communications equipment and, using a public pay phone, was capable of hooking Steve up with his home office via modem.

For about three years N4RVE has more or less stayed in one place, but he is now about to

get on the road again with BEHEMOTH (Big Human Energized Machine-Only Too Heavy). This new bike has a 105 speed transmission, cellular phone, computer, fax machine, satellite terminal and satellite navigation system. The entire electronic complex is powered by an array of solar cells mounted on the trailer that Steve pulls with the bike. In addition, the computer system understands about 100 verbal commands so Steve can communicate with his computer vocally.

Keep an eye and ear peeled for N4RVE; it could be the most interesting QSO you ever had!

AR 73 de Ike, N3IK

## WEFAX To The Max



## PC GOES/WEFAX 3.0 \$250

PC GOES/WEFAX 3.0 is a professional fax reception system for the IBM PC. It includes an AM/FM demodulator, software, cassette tutorial and 325 page manual. Check this partial list of our advanced features:

Res. up to 1280x800x256	APT Lat/Lon. Grids
Unattended Operation	Orbital Prediction
Colorization	Frame Looping
Zoom, Pan, Rotation	PCX & GIF Export
Contrast Control	Grayscale Printing
Tuning Oscilloscope	Infrared Analysis
Photometry/Histograms	Variable IOC & LPM


## PC HF FACSIMILE 5.0 \$99

PC HF Facsimile 5.0 is a complete shortwave FSK fax system for the IBM PC. It includes an FSK Demodulator, software, 250 page manual and tutorial cassette. Call or write for a complete catalog of products.

## Software Systems Consulting

615 S. El Camino Real, San Clemente, CA 92672  
Tel: (714) 498-5784 Fax: (714) 498-0568

## AMPLIFILTER™



- Improves shortwave reception.
- Use with any antenna, any receiver.
- Front panel control of all functions.

New! Amplifilter™ gives 20 db preamplifier gain or 20 db attenuation and cuts out overload and crossmodulation from local AM broadcast and TV/FM stations.

It has a broadband .1 to 1000 MHz amplifier, an attenuator, a 3 MHz highpass filter, and a 30 MHz lowpass filter. They are individually selectable by front panel switches, one at a time or in any combination.

**Model PA-360 Amplifilter™ \$79.95 + \$4 shipping/handling in U.S. & Canada. For 12V DC. Model PS-90 AC adapter \$9.95.**

California residents add sales tax.



Send for FREE catalog that shows our complete line of antennas, pre-amplifiers and filters.

## PALOMAR ENGINEERS

Box 455, ESCONDIDO, CA 92025  
Phone: (619) 747-3343



**Show Down in Connecticut:** Bob Thomas reports on a most unusual battle of the airwaves. A religious daytime AM station in Milford, CT, has had to resort to transmitting "pink noise" as a jamming device for several minutes before dropping carrier. This is to counter a pirate who intrudes on its frequency to make "unkind comments" about its programming and fund-raising appeals.

A search is under way for the pirate. Meanwhile the licensed station can be heard combatting the pirate on 1500 kHz around sunset.

**Uncle Charlie Strikes Again:** The FCC recently shut down two pirates. One was the Voice of Oz, operating from Unionville, PA. Many "Outer Limits" readers managed to log Voice of Oz during its relatively brief career and enjoyed receiving its very creative QSLs. The other FCC catch was WLAR, located near Arlington, MA. Both station operators were fined \$1,000.

**Black Liberation Radio** is still on the air. From time to time we have included reports on this station which transmits with a mighty one watt from a Springfield, IL, housing project. Black Liberation Radio started out a little less than five years ago as WTRA and then as Zoom Black Magic Liberation Radio. Recently the name was shortened.

The station is one authorities appear to wish would simply go away. They have issued a court order for it to stop broadcasting, and the FCC has fined the operator \$750. However, neither has been enforced. Operator Kantako (which means Resisting Warrior) says he will go to prison rather than stop voluntarily. He was largely ignored until he began broadcasting reports about local blacks' encounters with the police.

Recently his 9-year-old son was arrested as a result of an incident during a soccer match at his elementary school. Kantako, who is blind, and his wife have responded by removing their three children from public school and teaching them at home. Our thanks to Mike Townsend for the update on Kantako's station, which might possibly become a test case for FCC regulations.

A station inspired by Black Liberation Radio is Radio Free Venice in California. Recently, while broadcasting with 20 watts on 107.8 MHz, it was visited by no less than two FCC agents and 11 police officers and detectives, who, according to the operator, claimed he was "violent and dangerous." He was fined \$1,000. Radio Free Venice has responded by issuing a document entitled "Community Broadcaster's Notice and Declaration of First, Fourth, Ninth and Tenth Amendment Rights." Our thanks to Radio Free Venice for this information.

**Across the Dial:** Again we have a nice selection of logs this month. Let's see what has shown up on "Outer Limits" readers' receivers:

- Out in the state of Washington, Mike Sadlier mailed us the first log sent here of **KLOG, The Voice of Slobovia**, on 7406 at 0400. The program featured spoof commercials and talk shows.

- Our congrats to Jim Waylonis of Pennsylvania. He found a QSL from the zany **Voice of Bob** in his mail box. It would not surprise me if someday someone logging this found Bob himself in the mail box.

- In our nation's capital William Schmitz has had good success. Recent catches include **Radio Free Massachusetts** on 7415 at 0307 with commentary about feminism, **WAZU** on 7414 at 0130 with an anti-George Bush program and **KGUN** on 7415 at 2324 with an announcement about their reorganization.


It does look as if activity is increasing on the west coast. Regular reporter Skip Harwood checks in with two more from California. He found **KPUD Topotongo Radio** on 7407 at 0230 with Hawaiian music. **KCAN**, with the big band sound, also showed up on 7407 at 0408.

- It took a while, but those **WJDI** three-color QSL certificates were well worth waiting for. Among those who are now proud owners are John Demmitt in Pennsylvania, Bob Kozlerek in New Jersey, Pat Murphy in Virginia and Kevin Carey in New York. **WJDI** may have put out the most powerful land-based signal ever transmitted by an American pirate, 5.1 kW on 1620.

- In Connecticut Jim Kalach reports a happy mail box. QSLs arrived recently from **Radio Wolf International** and **WXZR Meontological Radio**.

**The Voice of God** was the dangerous station which had been jamming New York City police frequencies and threatening to kill officers if they found it. Well, find it they did, and both operators were arrested and their equipment seized. The station had been broadcasting from a high-rise apartment complex and had been responsible for delays in police response time. According to police, some of the confiscated equipment had been taken in the armed robbery of a truck on Broadway. Our thanks to Malcolm Milner, Dave Alpert and Bob Thomas for the above information.

**Ireland:** Apparently Irish pirates have found yet another legal loophole and are once again returning to the air. We have previously noted

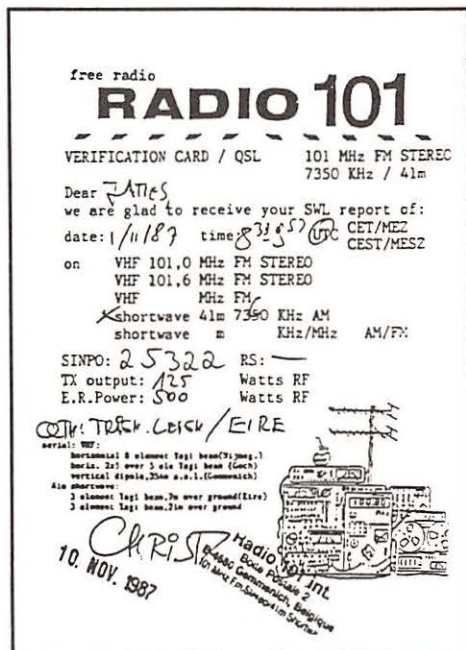

*Irish pirates return. From the collection of Gregg Bares, here is a QSL from out of the past.*

Radio Fax on 12255 and 6205, which according to Ary Boender in the Netherlands is claiming to be legal. Ary sent along a list of no less than 25 Irish stations which have popped up on the FM band. How long they will last is anybody's guess.

Meanwhile the situation is grim elsewhere. Ary confirms our previous report that currently there are only a very few British pirates active, and Radio Caroline remains silent. In the Netherlands he notes six years ago his survey found over 150 pirates in the Rotterdam area. Presently he can find none.

On a happier note, Gregg Allinson has been in recent contact with the Dutch Radio Tower. They do intend to continue on 15050, but for the moment are plagued by transmitter problems resulting in greatly reduced power. However, when Tower is able to return to full strength it can put in a nice USB signal in North America.

**Here and There:** Our thanks to **WORK** for the interesting photo of their action studios. Unfortunately there is not enough contrast to reproduce it here.

- Bob Thomas reports a new shortwave service out of Lithuania. It is a commercial station now authorized for shortwave on the last Saturday of each month. Look for it on 9710 in English and other languages from 0600 to 0700. Bob says Yugoslavia may be ripe for clandestine activity



# SCORPIO

ID(Sta):GKY6 (PORTISHEAD RADIO) Location: England  
 Date:02-27-91 Begin Prog:03:17:35 End Prog: Freq:17.220.00  
 Mode:FSK Signal Agt/Svc:Coastal(sea) QSL:  
 Remarks: SITOR traffic -<arq>-  
 Data:23> / > / 17.220.00 FSK / Signal() #2082  
 [Radio] [PSE] [CLS] Terminal Mode [CHG] [CLD] [Sr/F] [Qu/eX]  
 "LogScan" Log of John Doe

CND:AL  
 MODE NOW ALIST  
 .. THIS IS AN AUTO TELEX MESSAGE SYSTEM  
 TRAFFIC FOR THE FOLLOWING VESSELS:  
 USS FREDRICKS  
 HMS VINCE...

GA\*?

<arq FILE LOADED>

1 Manual 2 Func1 3 Func2 4 Func3 5 Upload 6 TimeON 7 TimeOFF 8 Clear 9 Log 10 Optns

Integrated Multi-Function Communications Software for IBM PCs

## Simultaneous

### Radio Control / Scanning

### Log Database Management

### TU Digital Control/Disp

- > LogScan, AutoLog and AutoTU functions > Interfaces with All Mode Terminal Units
- > Mouse/Function Key control of Kenwood & Icom Rcvrs & RS232 Digital Terminal Units
- > Search Log by any field including Remarks > Scan Receiver based on Log Search criteria
- > Copy RTTY & other DIGITAL signals > AutoTU sets TU mode as needed during scan
- > LogScan has real time UTC and FRQ. limit options > AutoLog builds database from "this"
- > Run other programs (DOS) within Scorpio > Includes "Top 100" HF database & Manual

Optional Log Databases available for only \$19.95 each include:

English Language SW Broadcast - MidEast - Utility - Others



\$89.95(+ S&H)



**ash-ton**

PO Box 830 - Dandridge, TN 37725 - (615-397-0742)  
 Fax: (615) 397 - 0466 Compuserve # 72557, 3560

## GUIDE TO FACSIMILE STATIONS

11th edition • 408 pages • \$ 33 or DM 50

The recording of FAX stations on LW and SW and the reception of meteo satellites are fascinating fields of radio monitoring. State-of-the-art hard- and software connects a radio receiver directly to a laser printer. The result is press photos, satellite pictures and weather charts in top quality.

The new edition of our FAX GUIDE contains not only the usual up-to-date frequency lists and transmission schedules, including those of all US Air Force, US Coast Guard and US Navy stations worldwide. It informs you particularly about new FAX converters and programs on the market, and includes the most comprehensive international survey of the "products" of weather satellites and FAX stations from all over the world. 312 sample charts and pictures were recorded in 1990 and 1991. Here are that special charts for aeronautical and maritime navigation, the agriculture and the military, barographic soundings, climatological analyses, and long-term forecasts, which are available nowhere else.

Additional chapters cover

- List of 341 frequencies monitored in 1990 and 1991.
- Exact schedules of 86 FAX stations on 313 frequencies.
- Geostationary and polar-orbiting meteo satellites. Schedules of GMS (Japan), GOES-East and -West (USA), and METEOSAT (Europe).
- Technique of FAX transmission. International regulations.
- Lists of abbreviations, addresses, and call signs. Test charts.

Further publications available are *Guide to Utility Stations* (9th ed.), *Air and Meteo Code Manual* and *Radioteletype Code Manual* (11th ed.). We have published our international radio books for 22 years. They are in daily use at equipment manufacturers, monitoring services, radio amateurs, shortwave listeners and telecommunication administrations worldwide. Please ask for our free catalogue, including recommendations from all over the world. All manuals are published in the handy 17 x 24 cm format, and of course written in English.

Do you want to get the **total information** immediately? For the special price of \$ 160 / DM 235 (you save \$ 27 / DM 40) you will receive all our manuals and supplements (altogether more than 1600 pages!) plus our *Cassette Tape Recording of Modulation Types*.

Our prices include airmail postage to anywhere in the world. Payment can be by \$ or DM cheque or cash. Dealer inquiries welcome - discount rates and pro forma invoices on request. Please mail your order to ☺

Klingenfuss Publications

Hagenloer Str. 14

D-7400 Tuebingen

Germany

Tel. 01149 7071 62830

with both Slovenia and Croatia having declared their independence. Meanwhile he notes the end of Chinese clandestine Voice of June 4. I managed to get a QSL from this one for an earlier broadcast just a few days before programs ceased.


• A few members of Congress would like to start a shortwave service for Asia similar to Radio Free Europe and Radio Liberty. Whether Radio Free Asia has any possibilities given the current budget situation in Washington is uncertain.

• An anonymous source reports the University Network is owned by Faith Center in Los Angeles and is not a pirate. Apparently what we reported on 1620 several months ago was a pirate relay of this legal service.

• Clandestine chasers might find the State Department Advisory Hotline useful for current information on world trouble spots, which sometimes produce clandestine activity. The number for recorded advisories is 202-647-5225. This is not a free call. You will need a touch tone phone, and it will normally take you several steps to access the message you want.

That's it for another month. Good DX, everyone.





PIRATE RADIO STATION QSL No. 0119

# WJDI 1620

THIS WILL VERIFY THE RECEPTION OF PIRATE RADIO STATION WJDI 1620 EXT ON A DATE AND TIME OF JAN 1, 1991 - 12:10AM EDT  
 SHORT NAME LISTENER KEVIN CAREY LOCATED IN THE TOWN AND STATE OF NY WJDI AT THE TIME OF YOUR RECEPTION WAS OPERATING WITH AN OUTPUT POWER OF 5.1 KILOWATTS.  
 COVERING MORE THAN 40 STATES IN AMERICA FROM NEW YORK STATE WJDI "THE PIRATE KING" HAS RECEIVED HUNDREDS OF LETTERS FROM OUR LISTENERS IN SUPPORT OF FREE RADIO IN AMERICA. WJDI OPERATES FOR THE MEDIUM AND SHORT WAVE LISTENER TO LOG AMERICA'S MOST POWERFUL PIRATE RADIO STATION... AND THE BEST IS YET TO COME! WJDI HAS BEEN UNDER CONSTANT FIRE FROM THE FEDERAL COMMUNICATIONS COMMISSION WHO WOULD LIKE TO SEE ALL FREE RADIO DESTROYED IN AMERICA.....  
 FORTUNATELY FOR ALL OF US INVOLVED IN RADIO THEIR FIGHTING A LOSING BATTLE! THANKS FOR THE LETTERS AND SUPPORT...

George Domach  
CHIEF ENGINEER

Kevin Carey is one of the owners of the very impressive WJDI QSL certificate.



# A Different Kind of Beacon

Not all longwave beacon signals originate from expensive commercial installations. At the other end of the scale is a small but growing group of ham-like experimenters who inhabit 160 to 190 kHz (1750 meters). On this band, low power, homebrew equipment is the order of the day. The LOWFERS (Low Frequency Experimental Radio Stations) work against some pretty tough odds to get their signals heard.

These unlicensed but legal stations operate under a little-known provision in the FCC Rules, Part 15, Subpart D. In essence, the rules permit the operation of a one watt input transmitter as long as the antenna length does not exceed 50 feet and any out of band emissions are kept below 20 dB.

At first, a 50 foot antenna may sound pretty generous, but at these low frequencies it's akin to using a paper clip on the ham bands. Despite the severe power and antenna restrictions, however, many lowfers do report fairly regular contacts and receptions in the +/-300 mile range.

It used to be that almost all lowfer operation was restricted to the east and west coasts of the U.S. While the coasts still hold the majority of active stations, more and more inland lowfers are becoming active. There are also a few lowfers in Canada operating with special Department of Communications permits.

Most lowfer operation is beacon style. A typical transmission consists of the station's call sign followed by QSL information or other station details.

If you're lucky, you may also hear some two-way contacts from time to time. The most common mode used is standard (keyed carrier) CW, so you need only turn on your receiver's BFO for proper reception. Besides CW, there's also a fair amount of experimenting with other modes such as RTTY, voice and various narrow band techniques.

As for operating schedules, many beacons operate 24 hours a day so you should try listening at all times. Some beacons operate on a more limited basis such as weekends, evenings or by special request.

Because no license is required, lowfers create their own call signs. Usually, it's made up of the operator's initials or the suffix of a ham call. Table 1 lists a few lowfer beacons you might want to try. You stand a good chance of hearing at least one of them if you're in the general vicinity. This is just a small sampling of stations; Ken Stryker's *Aero/Marine Beacon Guide* (2856-G W. Touhy Ave., Chicago, IL 60645) contains a complete listing of all known lowfer beacons.

Listening for lowfers is perhaps the most

rewarding LF challenge. When tuning the band, be patient and remember that you're trying for signals that are running flea power as compared to the commercial NDBs (non-directional beacons).

Interference is also a limiting factor. Besides the usual static sources we are used to (light dimmers, power lines, etc.) there are frequent data bursts from Air Force GWEN (Ground Wave Emergency Network) stations on the lower and middle parts of the band. These can easily wipe out a lowfer signal that might otherwise be readable.

## Tips for Better Reception


Besides patience, there are a few things you can do to improve your chances of hearing a lowfer. First, use a good set of headphones. This will enable you to concentrate more on the signals of interest and block out surrounding household noises.

If your receiver has a selectivity control, use the narrowest setting available when hunting for lowfers. A narrow passband will help reject signals on nearby frequencies that could cause interference.

The receiver antenna is also important. I've had good results just using my Sangean ATS-803's internal ferrite antenna in low noise locations. However, in most cases you will do much better with a larger external loop antenna that can be turned to favor the desired signal while rejecting interference. This works well provided the interfering signal isn't in the same direction as the desired station. An active antenna is also a good bet. Since their physical size is small, they're less likely to be noise collectors as compared with a long-wire antenna.

Just as with NDB listening, the best times to look for lowfers is at night during the cooler months. But don't neglect other times either. There have been many cases of enhanced propagation where surprisingly long distances were achieved in full daylight.

Lowfers are always happy to receive reception reports from listeners. If you hear a lowfer and don't know the station's address, send me the reception details along with two SASEs. I'll forward your report to the station operator and in turn you will receive a QSL from the

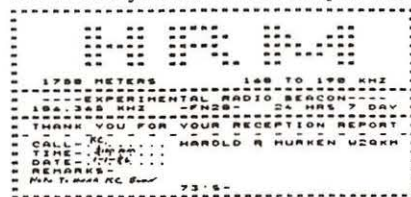

A QSL sent by a NJ Lowfer

Table 1 Selected Lowfer Stations

Freq	Call	Location
175.000	RNI	Yonkers, NY
*175.388	KRY	Chardon, OH
175.703	FAW	Orem, UT
176.850	7FS	Belfair, WA
*180.400	4NB	Manchester, TN
183.544	MEL	San Jose, CA
184.016	EK	Sunnyvale, CA
185.000	ZYK	Redway, CA
185.400	PLI	Burbank, CA
187.335	DCH	Berlin, MD
187.460	OLR	Altam, MN
*187.500	IHX	Olean, NY
187.770	AZ	Tucson, AZ
188.540	MEP	Jonesboro, AR
188.812	1SUN	Durant, OK
189.360	TH	Colt's Neck, NJ
*190.400	30HH	Richmond Hill, ONT

\*Other than 24 hour operation

station. For many listeners, a lowfer QSL is the most highly prized longwave verie.

Do you want to know more about the experimenter's band? Information about lowfer activity, equipment tips and other longwave topics can be found in the *Lowdown*, the monthly publication of the Longwave Club of America (LWCA). A one year subscription is \$12. The club's address is: 45 Wildflower Rd. Levittown, PA, 19057.

## Other Happenings

At the Rochester Hamfest I had the pleasure of meeting several longwave buffs who are also devoted readers of *Monitoring Times*. One of these people was Chet Koziol, W2IHX. Chet tells me that his lowfer beacon "IHX" is on the air in Olean, NY (187.5 kHz). He normally runs the beacon from 7 to 11 p.m. EST.

Chet's also an active LF listener. He uses a Kenwood R5000 receiver and a 7 foot homebrew loop antenna. With this setup he's heard lowfers KRY Ohio and DCH Maryland as well as several European LF broadcasters.

Herb Balfour, VE3OHH of Richmond Hill, Ontario, sent me a sample copy of his monthly newsletter, *The Northern Observer*. If you're inclined toward the experimenter/technical side of longwave, this one might be for you. *The Observer* focuses on LF and VLF topics but also gives ample coverage to activity on the medium frequencies.

It covers activity in eastern, midwestern and central North America. The address for *The Northern Observer* is: 91 Elgin Mills Road West, Richmond, Ontario, L4C4M1.

As always, I'd like to hear from you. Send your questions, comments and loggings to me at: Below 500 kHz, c/o Monitoring Times, P.O. Box 98, Brasstown, NC 28902.

That wraps it up for September. I'll see you next month and happy listening.



# THE WORLD'S FINEST RECREATIONAL ELECTRONICS JOURNAL



## THE POWER

**Elektor Electronics USA** is a 76-page monthly with an average of 14 articles per issue, covering virtually every technology. Over 80% are construction features which include circuit diagrams, schematics, parts lists, and sources. The magazine's service department will supply circuit cards, software, firmware, and front panels for most projects.

Tutorial articles by outstanding authorities explain the latest technological developments.

**Elektor Electronics USA** construction projects are written, with few exceptions, by staff engineers who design and test them with the aid of staff technicians and support people. All project prototypes are built and thoroughly tested before publication and also reviewed by the Dutch government's equivalent of the US Underwriters Laboratories.

**Elektor Electronics USA** originates in Beek, The Netherlands. The multilingual staff not only produces the magazine's content, but also translates the articles into Swedish, English, French, German, Spanish and Portuguese. The magazine is published in separate editions for Sweden, Germany, England, The Netherlands, France, Spain, Portugal, Greece, India and Pakistan—and now The United States and Canada. The North American edition will feature new product and conference news as well as reader correspondence and free classified ads.

## THE FUN

### SAMPLES FROM SIX RECENT ISSUES:

A Facsimile Interface for the IBM-PC, Automatic Power-down for PCs, A Mini EPROM Viewer, A MIDI Master Keyboard, Remotely Controlled Stroboscope, Rear Window Wiper Coupler, A Four-sensor sunshine recorder, Power Zener Diode, An Electronic Load, PLL sine wave generator, A Horn Loudspeaker, Intro-scan for CD Players, A PC Servicing Card, Centronics A-D/D-A converter, Acoustic Temperature monitor, Experimental all-waveband ferrite rod antenna, Image segmentation, Budget sweep/function generator, Transistor characteristic plots, An RS-232 Splitter/Multiplier, Digitally controlled preamplifier, All Solid State Preamplifier (2 parts), A Visual Hard Disk monitor, Coded locking security circuit, The digital model train: (13 parts), A wiring allocation tester, A video line selector, A Q meter, A Video mixer, Bridge Rectifiers for high output AC-DC and Multiplier use, Automatic Power line isolator switch, A 3-pen, 20" plotter with parallel port, An AC Millivoltmeter, An FM tuner board for your PC.

You can become a subscriber to **ELEKTOR ELECTRONICS USA** at almost **25% OFF THE REGULAR SUBSCRIPTION PRICE**. Just \$19.95 for eleven monthly issues. (Save \$8 off the regular \$28 annual rate.)

We're so sure you'll be delighted, we guarantee it: ALL your money back if you are not completely satisfied, for any reason. No ifs, no buts, period.

O.K. sign me up as a charter subscriber to **Elektor Electronics USA**\* I will receive my first issue in 4-6 weeks.

— **One year (11 issues) @ \$19.95** ☐CK ☐MO ☐MC ☐VISA

— **Two years (22 issues) @ \$37.95**

Please add \$8 per year for Canadian postage.  
Rates guaranteed until Dec. 30, 1991.

\*Available to subscribers in USA and Canada, only.

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY \_\_\_\_\_

STATE \_\_\_\_\_

ZIP \_\_\_\_\_

MC/VISA \_\_\_\_\_

EXP. \_\_\_\_\_

### AUDIO AMATEUR PUBLICATIONS

PO Box 876, Dept. MT9

Peterborough, NH 03458-0876

(603) 924-9464 FAX: (603) 924-9467

Answering machine for credit card orders only:  
before 9:00 a.m., after 4:00 p.m. and weekends.  
Have all information plus MC/VISA available.



# Interfacing the M7000 to Your Computer

Computer Interface Cable to the Universal M7000

M7000 J2		COMPUTER DB25 or DB9			
pin #	pin name	pin name	pin #	or	pin #
4	RCV DATA	+ XMT DATA	2	or	3
5	XMT DATA	+ RCV DATA	3	or	2
6	HAND SHAKE	+ DTR	20	or	4
16	GROUND	+ GROUND	7	or	5
On the computer comm port		-RTS	4	or	7
Connect these pins		-CTS	5	or	8

Last month I reviewed the Universal M1000 and I mentioned it has one advantage over the M7000. It has the capability of saving text files to a disk. If you own an M7000 you've probably read the manual and you're probably familiar with the rear apron connections.

What you may not know is that there is a way you can connect it to your computer. Like the M1000 this will give you the advantage of capturing text and placing it in a file which can then be edited and stored.

## Hardware

If you own an IBM or compatible, or even a Commodore 64, and have a telephone modem or modem software, you have just about everything you need for the interface. The only thing you will need is a cable to connect the computer to the M7000. The Commodore 64 requires an RS232 adapter on the comm port.

The M7000 doesn't follow any standard for modem connections so you will have to make your own cable. The chart, Figure 1, shows how to wire it. You will need two DB25 or one DB25 and one DB9 connector. Some computers have 9-pin connectors for comm 1. You can use any multi-conductor cable; however, shielded cable may reduce the interference to your SW receiver.

## Software

In order to send ASCII characters to the computer you must first turn on the M7000's transmit port. The program below can be used with GW Basic or Basica. You must first run it under the Basic interpreter. The program will automatically exit Basic. Then you can run a standard telephone modem program like Procomm or Crosstalk under DOS. (I don't have information on how to send ASCII to the comm port on a C64, but maybe a reader out there can help us.)

The program below can also be written in Quick Basic and compiled into an EXE file. With Quick Basic the SYSTEM command on line 40 isn't needed. Then you can write a batch file to

turn on the M7000 and run the modem software by typing one command.

The M7000, the Basic OPEN statement and the communications software should have the same baud rate, number of bits and number of stop bits in order to establish the proper communications link.

```
10 OPEN "com1: 4800, n, 8, 2, ds " FOR RANDOM AS #1
20 PRINT #1, CHR$(30)
30 CLOSE
40 SYSTEM
50 END
```

## There's an Easier Way

Procomm 3.0 has an interesting feature called "The Translate Table." It allows a user to modify any character which is received from a comm port to another character. You can change, for example, the letter "A" to "x." Unfortunately for our use, Procomm's translate table only changes the "incoming" characters. I don't know if Crosstalk even has a translate table.

I do know a shareware program called Telix that can translate both incoming and outgoing characters. You can use this feature to change the keys on your computer's keyboard to control the M7000.

Telix is probably available on telephone bulletin boards across the nation. There is usually a DOC file with ordering information, whereby, after sending a user's fee, you will receive a nice manual and a license agreement to use the software. I highly urge you to do this because it took the developer a long time to write the program and the fee will in some cases keep you updated with current versions.

You can order an evaluation copy as well as other shareware from the Book Warehouse on its

toll free number, 800-231-0273. The disks are \$5 for two and you can get other disks under the title of Communications, Ham Radio, BBS, etc.

To set up the Telix translate table, press alt-W. A window will appear that will indicate if you want incoming or outgoing. Select outgoing by pressing the "right arrow." You will then see a table appear on the screen that is numbered from 0 to 111 and a menu at the bottom. Use the "right arrow" again to select EDIT and press the Enter key.

Character: New Value: (Esc to exit)

This menu will be displayed below the table. Type 91 and press Enter. Then type 30 and press Enter. Repeat the last two steps and change Character 93 to 31.

You have just changed the right bracket "[" key to turn on the M7000 and the left bracket "[" to turn it off. If the M7000 is connected properly and if the baudrate and bits are set correctly, you should see the same characters displayed on the computer screen that are displayed on the M7000's monitor.

By using the outgoing table, the M7000 manual, and the Telix manual, you can change other keys like the B key to select "Baudot" or the F key to put the M7000 into FAX mode.

Exit the translation table Edit mode by pressing the ESC key. You can select Save to save the table. Use a file name which is simple to remember (such as the single letter "M"), since each time you go into Telix, you have to modify the translation table by selecting Load in the translation table menu.

Telix has other commands which allow you to either save what's captured in the screen buffer or capture the copied text to a file. You can then use your favorite text editor like PC Write (more shareware), Sidekick or Windows 3.0 to edit the captured text.

NNNN



## AIRCRAFT TRAFFIC

USAF C-5A Galaxy, MAC 68307, 13244 kHz. Full data prepared QSL card, verified by Teresa Shallock, public affairs office. Received in 25 days for an English utility report and mint postage. Aircraft address: 436th MAW/PA, Dover AFB, DE 19902-5154 (Patrick O'Connor, Hinsdale, NH)

## BELGIUM

BRT International, 9925/13675/13720 kHz. Full data QSL cards with verification signers. Received in 65/99/119 days for an English report. Station address: P.O. Box 26, B-1000 Brussels, Belgium. (Ed Mayberry, Cedar Park, TX) (Nicholas Adams, Newark, NJ)

## BULGARIA

Radio Sofia, 9700/15330 kHz. Full data QSL cards and souvenirs, without verification signers. Received in 61/71 days for an English report. Station address: 4 Dragan Tsankov Blvd., Sofia, Bulgaria. (Mayberry, TX) (Adams, NJ)

## DENMARK

Radio Denmark, 15165 kHz. Form letter for non-QSL policy and schedule. Received in 15 days for an English report. Station address: DK-1999, Fredricksburg C, Denmark (Mayberry, TX)

## ECUADOR

La Voz del Napo, 3280 kHz. Full data QSL and station souvenirs, verified by Ramiro Babrena. Received in 54 days for a Spanish report and mint postage. Station address: Mision Josefina, Tena, Ecuador. (Nick Grace, Harvard, MA)

## EGYPT

Radio Cairo, 9900 kHz. Full data QSL, without verification signer. Received in 178 days for an English report. Station address: P.O. Box 566, Cairo, Arab Republic of Egypt. (Adams, NJ)

## GUAM

KSDA Adventist World Radio-Asia, 13720 kHz. Full data QSL sticker and station souvenirs. Received in 63 days for an English report. Station address: P.O. Box 7500, Agat, Guam 96928. (Mayberry, TX)

## MEXICO

La Hora Exacta, 9555 kHz. No-data QSL letter in English and station souvenirs, signed by Romero Rodriguez, station manager. Received in 30 days for a Spanish report and mint postage. Station address: Mexicano de la Radio, Margaritas 18 Col. Florida, 01030 Mexico, D.F. Mexico. (Grace, MA)

## NONDIRECTIONAL BEACONS

IKY, Springfield, Kentucky, 429 kHz. Full data prepared QSL card, verified by Roy Riser. Received in 17 days for an English utility report and mint postage. Station address: Lebanon-Springfield Airport, Springfield, Ky. (Holbrook, MD)

IY, Charles City, Iowa, 417 kHz. Full data prepared QSL card, verified by W.R. Kyle. Received in nine days for an English utility report and mint postage. Station address: Charles City Municipal Airport, Charles City, Iowa. (Holbrook, MD)

MP, Montauk Point Light Station, New York, 293 kHz. Full data prepared QSL card with illegible verification signer. Received in 47 days for an English utility report and mint postage. Station address: USCG, R.1, Box 155, Montauk Point, N.Y. 11954-9801. (Holbrook, MD)

RNW, Washington, North Carolina, 388 kHz. Full data prepared QSL card, verified by Herbert Durland, airport manager. Received in 72 days for an English utility report



John Carson sent in this QSL from Radio New Zealand.

and mint postage. Station address: Fountain Aviation, P.O. Box 610, Washington, N.C. 27889. (Holbrook, MD)

ZLS, Stella Maris Long Island, Bahamas, 525 kHz. Full data station letter and QSL form, verified by L.A. Bethel, licensing frequency and system control. Received in 75 days for an English utility report and one U.S. dollar. Station address: Bahamas Telecommunications Corp., P.O. Box N3048, Nassau, Bahamas. (Holbrook, MD)

## PORTUGAL

Radio Portugal Int'l, 9705 kHz. Full data QSL card and station souvenirs, without verification signer. Received in 63 days for an English report. Station address: Rua de S. Marcal 1-B, 1-200 Lisboa, Portugal. (Mayberry, TX)

## SHIP TRAFFIC

ALGONORTH-VOXZ (bulk carrier), 156.500 MHz. Full data prepared QSL card, stamped with ship's seal. Received in nine days for an English utility report and a stamped self-addressed envelope. Ship address: c/o Marine Post Office, Detroit, MI 48222. (Russ Hill, Ferndale, MI)

AMERICAN MARINE-WQZ7791 (bulk carrier), 156.500 MHz. Full data prepared QSL card, stamped with ship's seal. Received in 14 days for an English utility report and a stamped self-addressed envelope. Ship address: c/o Marine Post Office, Detroit, MI 48222. (Hill, MI)

ARMCO-WE6279 (bulk carrier), 156.500 MHz. Full data prepared QSL card, stamped with ship's seal. Received in 11 days for an English utility report and a stamped self-addressed envelope. Ship address: c/o Marine Post Office, Detroit, MI 48222. (Hill, MI)

HMAS PERTH (DDG-38) WKPT-Royal Australian Naval Fleet (destroyer), 8198 kHz USB. Partial data prepared QSL card verified, ship photo and friendly letter. Received in 93 days for an English utility report, souvenir postcard and one U.S. dollar. Ship address: c/o International Mail Exchange, Warships Section, Clyde, NSW 2890, Australia. (Rick Albright, Merced, CA)

HMS ARROW (F173) GQIB (type 21 frigate), 16463.1 kHz USB. Full data prepared QSL card, verified by P. Bird, radio supervisor. Received in 92 days for English follow-up report. Ship address: BFPO Ships, London, England. (Patrick O'Connor, Hinsdale, NH)

HMS EXETER (D89) GVUJ (type 42 destroyer), 16463.1 kHz. Full data prepared QSL card and ship's logo, verified by M. Studden. Received in 22 days for an English utility report and one IRC which was returned. Ship address: BFPO Ships, London, England. (O'Connor, NH)

RFA OAKLEAF (A-111) GABS-Royal Fleet Auxiliary (replenishment ship), 16463 kHz USB. Full data prepared QSL card stamped by senior radio supervisor seal. Received in 23 days for an English utility report, souvenir postcard, and one U.S. dollar. Ship address: c/o BFPO Ships, London, England. (Albright, CA)

M/S HORNGULF-ELHA9 (banana ship), 22065 kHz USB. Full data prepared QSL card and ship souvenirs. Received in 43 days for an English utility report, souvenir postcard and one U.S. dollar. Ship address: c/o Horn-Linie, Johannis Bollwerk 6-8, W-2000 Hamburg, Germany. (Albright, CA)

Sterntrawler OTTO WICKBOLDT-Y4HQ, (former East German fishing vessel), 16506 kHz USB. Full data prepared QSL card stamped with ship's seal and two page English letter. Received in 148 days for a German utility report, souvenir postcards and one U.S. dollar. Ship address: c/o Rostocker Fischfang Reederei G.m.b.H., 0-2500 Rostock, Federal Republic of Germany. (Albright, CA)

## SOUTH KOREA

Radio Korea, 9750/15575 kHz. Full data QSL cards and station souvenirs. Received in 65/67/72 days for English reports. Station address: #18 Yoido-Dong, Youngdung Po-Gu, Seoul 150-790, Korea. (Lloyd Van Horn, New Orleans, LA) (Mayberry, TX) (Adams, NJ)

## SPAIN

Spanish Foreign, 11880/9630 kHz. Full data QSL cards and schedules, without verification signer. Received in 30/37 days for an English report. Station address: Apartado 156.202, 28080 Madrid, Spain. (Mayberry, TX) (Adams, NJ)

## VIETNAM

Voice of Vietnam, 9840 kHz. Full data QSL card, with illegible signature. Received in 133 days for an English report. Station address: Overseas Service, 58 Quan Su St., Hanoi, Vietnam. (Bruce R. Sebrin, Ukiah, CA)

## NextDay Reception Reports

Two-Color Printing  
Rainbow Cardstock  
100 200 300  
\$19.95 \$24.95 \$29.95

Specify • Receiver  
• Antenna  
• Your 40-Word Personal Message

On Two Colours, 100% of the cost of the New York, NY 10011

• Command Attention • Send Clear Reports • Speed Replies • Save Time •  
Box 50062-M • Provo, UT 84605 • AntennasWest



## How to Use the Shortwave Guide

## 1: Convert your time to UTC.

Eastern and Pacific Times are already converted to Coordinated Universal Time (UTC) at the top of each page. The rule is: convert your local time to 24-hour format; add (during Daylight Savings Time) 4, 5, 6, or 7 hours for Eastern, Central, Mountain, or Pacific Time, respectively.

Note that all dates, as well as times, are in UTC: for example, the BBC's "Ken Bruce Show" (0300 UTC Sunday) will be heard on Saturday evening (8:30 PM Eastern, 5:30 PM Pacific) in North America, not on Sunday.

## 2: Choose a program or station you want to hear.

Some selected programs appear on the lower half of the page for prime listening hours. If it's news you're interested in, check out the complete "Newline" listing, which begins on the next page.

Occasionally program listings will be followed by "See X 0000." This information indicates that the program is a re-run, and refers to a previous summary of the program's content. The letter stands for a day of the week, as indicated below, and the four digits represent a time in UTC.

S: Sunday                      H: Thursday  
M: Monday                    F: Friday  
T: Tuesday                    A: Saturday  
W: Wednesday

## 3: Find the frequencies for the program or station you want to hear.

Look at the page which corresponds to the time you will be listening. Comprehensive frequency information for English broadcasts can be found at the top half of the page.

The frequency listing uses the same day codes as the program listings; if a broadcast is not daily, those day codes will appear before the station name.

## 4: Choose the most promising frequencies for the time, location, and conditions.

Of course, every station can't be heard all the time. To help you find the right frequency, we've included information on the target area of each broadcast. Frequencies beamed toward your area will generally be easier to hear than those beamed elsewhere, even though the latter will often still be audible. Every frequency is followed by one of these target codes:

am: The Americas	me: Middle East
na: North America	as: Asia
ca: Central America	au: Australia
sa: South America	pa: Pacific
eu: Europe	va: various
af: Africa	do: domestic broadcast
me: Middle East	om: omnidirectional

Consult the propagation charts. To help you further find the right frequency, we've included propagation charts at the back of this section, which take into account conditions affecting the audibility of shortwave broadcasts. Simply pick out the region in which you live and find the chart for the region in which the station you want to hear is located. The chart indicates the optimum frequencies for a given time in UTC.

## Programs for Shortwave Listeners

**NOTE:** By popular request, this new feature of the "Shortwave Guide" will appear about every three months. As this is our first effort, there will undoubtedly be many errors, and we ask our readers to let us know if they find any. Send your suggestions and fixes to Program Manager Kannon Shanmugam.

This section lists programs with news and information about shortwave radio for listeners. (RR) denotes reruns of programs broadcast earlier in the week. For brevity, only programs at certain peak listening times are included.

**Sundays**

0025 Spanish Foreign Radio: DX Spot  
0035 Radio Havana Cuba: DX'ers Unlimited  
0039 HCJB: DX Party Line  
0110 VOA(Americas, Caribbean): Comm World  
0125 Spanish Foreign Radio: DX Spot (RR)  
0130 Radio For Peace Int'l: World Of Radio  
0218 Swiss Radio Int'l: Swiss SW Merry-Go-Round  
0230 KSDA, Guam: DX Asiawaves  
0235 Radio Budapest: DX World  
0235 Radio Havana Cuba: DX'ers Unlimited (RR)  
0239 HCJB: DX Party Line (RR)  
0330 Radio Japan: DX Corner  
0330 TWR, Bonaire: Bonaire Wavelengths  
0330 Voice of Turkey: DX Corner  
0418 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
0435 Radio Havana Cuba: DX'ers Unlimited (RR)  
0509 HCJB: DX Party Line (RR)  
0525 Spanish Foreign Radio: DX Spot (RR)  
0635 Radio Havana Cuba: DX'ers Unlimited (RR)  
1130 Radio Austria Int'l: Austrian Shortwave Panorama  
1430 Radio Australia: Communicator  
1430 Radio Austria Int'l: Austrian SW Panorama (RR)  
1530 Radio Japan: DX Corner (RR)

**Monday**

0130 Radio Japan: DX Corner (RR)  
0430 Radio For Peace Int'l: World Of Radio (RR)  
0430 Radio New Zealand Int'l: Mailbox (biweekly)  
0530 BBC: Waveguide

0637 BRT, Brussels: Radio World  
1307 BRT, Brussels: Radio World (RR)  
1530 WRNO: World Of Radio  
2320 Radio Vilnius: Feature For DX'ers

**Tuesday**

1143 Radio Sweden: Sweden Calling DX'ers (biweekly)  
1313 Radio Sweden: Sweden Call DX'ers (biweek) (RR)  
1543 Radio Sweden: Sweden Call DX'ers (biweek) (RR)  
1610 Radio Polonia: DX Program  
2315 Radio Polonia: DX Program (RR)  
2343 Radio Sweden: Sweden Call DX'ers (biweek) (RR)

**Wednesday**

0113 Radio Sweden: Sweden Call DX'ers (biweek) (RR)  
0213 Radio Sweden: Sweden Call DX'ers (biweek) (RR)  
0230 Radio For Peace Int'l: World Of Radio (RR)  
0235 Radio Budapest: DX News  
0343 Radio Sweden: Sweden Call DX'ers (biweek) (RR)  
0640 Radio Polonia: DX Program (RR)  
1440 Radio Polonia: DX Program (RR)

**Thursday**

0100 HCJB: Ham Radio Today  
0130 BBC: Waveguide (RR)  
0235 Radio Budapest: DX World (RR)  
0300 HCJB: Ham Radio Today (RR)  
0340 Radio Sofia: Calling Amateurs And DX'ers  
0530 HCJB: Ham Radio Today (RR)  
1152 Radio Netherlands: Media Network

1452 Radio Netherlands: Media Network (RR)  
1652 Radio Netherlands: Media Network (RR)

**Friday**

0016 Radio Prague Int'l: DX Special  
0052 Radio Netherlands: Media Network (RR)  
0116 Radio Prague Int'l: DX Special (RR)  
0316 Radio Prague Int'l: DX Special (RR)  
0352 Radio Netherlands: Media Network (RR)  
0416 Radio Prague Int'l: DX Special (RR)  
0430 Radio Australia: Communicator (RR)  
1611 Radio Portugal: DX Program (monthly)

**Saturday**

0235 Radio Budapest: DX News (RR)  
0241 Radio Portugal: DX Program (monthly) (RR)  
0300 Radio For Peace Int'l: World Of Radio (RR)  
0635 BRT, Brussels: Radio World (RR)  
0648 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
1118 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
1210 Voice of America: Communications World (RR)  
1305 BRT, Brussels: Radio World (RR)  
1318 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
1348 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
1548 Swiss Radio Int'l: Swiss SW Merry-Go-Round (RR)  
1630 KSDA, Guam: DX Asiawaves (RR)  
2330 KSDA, Guam: DX Asiawaves (RR)  
2330 WRNO: World Of Radio (RR)  
2330 WWCR: World Of Radio  
2335 BRT, Brussels: Radio World (RR)



**MT Monitoring Team***P.O. Box 98, Brasstown, NC 28902*

**Greg Jordan**  
Frequency Manager  
*North Carolina*

**Dave Datko**  
*California*

**Jack Hubby**  
*California*

**Tammy Wells**  
*Maine*

**Kannon Shanmugam**  
Program Manager  
*Kansas*

**John Carson**  
*Oklahoma*

**Jim Frimmel**  
*Texas*

**newsline**

"Newsline" is your guide to news broadcasts on the air. ■ All broadcasts are world news reports unless followed by an asterisk, which means the broadcast is primarily national news. ■ All broadcasts are daily unless otherwise noted by the day codes.

**0000 UTC**  
**(8:00 PM EDT, 5:00 PM PDT)**

BBC  
CBC, Northern Quebec  
Christian Science Monitor  
Radio Australia  
Radio Beijing  
Radio Canada Int'l [S-M]  
Radio Havana Cuba [T-S]  
Radio Kiev  
Radio Korea  
Radio Luxembourg  
Radio Moscow  
Radio New Zealand Int'l [M-A]  
Radio Prague Int'l  
Radio Thailand  
Radio Yugoslavia  
Spanish Foreign Radio  
Voice of America  
WWCR [T-A]  
0005  
Radio Pyongyang  
0010  
Radio Beijing\*  
0030  
Christian Science Monitor (Asia)  
[M]  
Christian Science Monitor [T-F]  
HCJB  
Radio Havana Cuba [T-S]  
Radio Netherlands [T-S]  
Radio New Zealand Int'l [M-F]  
Voice of America (Americas,  
East Asia) (Special English) [T-S]  
Voice of America (East Asia)  
(Special English) [M]  
0045  
Radio Korea (News Service)  
0055  
WRNO [W, A]

**0100 UTC**  
**(9:00 PM EDT, 6:00 PM PDT)**

All India Radio  
BBC

CBC, Northern Quebec [S-M]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Belize  
Radio Canada Int'l [S-M]  
Radio Havana Cuba [T-S]  
Radio Japan  
Radio Luxembourg  
Radio Moscow  
Radio New Zealand Int'l [M-A]  
Radio Thailand  
Radiotelevisione Italiana  
Spanish Foreign Radio  
Voice of America  
Voice of Indonesia  
WWCR [T-A]  
0115  
Radio Havana Cuba\* [T-S]  
0130  
Christian Science Monitor (Asia)  
[M]  
Christian Science Monitor [T-F]  
Radio Austria Int'l  
Radio Havana Cuba [T-S]  
Radio Moscow  
Radio Portugal [T-A]  
Voice of Greece [M-A]  
0155  
Voice of Indonesia

**0200 UTC**  
**(10:00 PM EDT, 7:00 PM PDT)**

BBC  
CBC, Northern Quebec [T-S]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Budapest  
Radio Canada Int'l [T-A]  
Radio Havana Cuba [T-S]  
Radio Moscow  
Radio New Zealand Int'l [M-F]  
Radio Prague Int'l  
Radio Romania Int'l  
Radio Thailand  
RAE, Buenos Aires [T-A]

Swiss Radio Int'l  
Voice of America  
Voice of Free China  
Voice of Myanmar  
WWCR [T-A]  
0215  
Radio Cairo  
0230  
Christian Science Monitor  
(Africa, Europe) [M]  
Christian Science Monitor [T-F]  
HCJB  
Radio Havana Cuba [T-S]  
Radio Pakistan (Special English)  
Radio Tirana, Albania  
0245  
Radio Korea (News Service)  
0250  
Radio Yerevan

**0300 UTC**  
**(11:00 PM EDT, 8:00 PM PDT)**

BBC  
CBC, Northern Quebec  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Belize  
Radio Havana Cuba [T-S]  
Radio Japan  
Radio Moscow  
Radio New Zealand Int'l [M-F]  
Radio Prague Int'l  
Radio Sofia  
Radio Thailand  
Voice of America  
Voice of Free China  
Voice of Turkey  
WRNO [F]  
WWCR [T-S]  
0309  
BBC\*  
0310  
Radio Beijing\*  
0315  
Radio Cairo

Radio Havana Cuba\* [T-S]  
0330  
BBC (Africa)\*  
Christian Science Monitor  
(Africa, Europe) [M]  
Christian Science Monitor [T-F]  
Radio Havana Cuba [T-S]  
Radio Netherlands [T-S]  
Radio Tirana, Albania  
UAE Radio, Dubai  
0340  
Voice of Greece [M-A]  
0350  
Radio For Peace Int'l [T-A]  
Radiotelevisione Italiana  
0355  
Radio Japan [M-F]  
WYFR (Network) [T-A]

**0400 UTC**  
**(12:00 AM EDT, 9:00 PM PDT)**

BBC  
CBC, Northern Quebec [T-S]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Canada Int'l  
Radio Havana Cuba [T-S]  
Radio Moscow  
Radio New Zealand Int'l [M-F]  
Radio Romania Int'l  
Radio RSA  
Radio Tanzania  
Radio Thailand  
Swiss Radio Int'l  
Voice of America  
0405  
Radio Pyongyang  
0410  
Radio Beijing\*  
0425  
Radiotelevisione Italiana  
0430  
Christian Science Monitor  
(Africa, Europe, NE Asia) [M]  
Christian Science Monitor [T-F]

Radio Botswana  
Radio Havana Cuba [T-S]  
Radio Moscow (World Service)  
Radio Tirana, Albania  
0450  
Radio RSA

**0500 UTC**  
**(1:00 AM EDT, 10:00 PM PDT)**

BBC  
CBC, Northern Quebec  
Christian Science Monitor  
Deutsche Welle  
HCJB  
Radio Australia  
Radio Beijing  
Radio Havana Cuba [T-S]  
Radio Japan  
Radio Lesotho  
Radio Moscow  
Radio New Zealand Int'l [M-F]  
Radio Thailand  
Spanish Foreign Radio  
Voice of America  
Voice of Nigeria  
0510  
Radio Beijing\*  
Radio Botswana  
0515  
Radio Canada Int'l [M-F]  
Radio Havana Cuba\* [T-S]  
0530  
BBC (Africa)\*  
Christian Science Monitor  
(Africa, Europe, NE Asia) [M]  
Christian Science Monitor [T-F]  
Radio Austria Int'l  
Radio Havana Cuba [T-S]  
Radio Moscow (World Service)  
Radio Romania Int'l  
Radio Thailand  
UAE Radio, Dubai  
0540  
Radio Prague Int'l  
0550  
Radio For Peace Int'l [T-A]



## newsline

**0600 UTC**  
**(2:00 AM EDT, 11:00 PM PDT)**

BBC  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Havana Cuba [T-S]  
Radio Moscow  
Radio New Zealand Int'l [M-A]  
Voice of America  
Voice of Nigeria  
0605  
Radio Pyongyang  
0610  
Voice of Malaysia  
0630  
BBC (Africa)\*  
BRT, Brussels  
Christian Science Monitor [M-F]  
Radio Finland [M-A]  
Radio Havana Cuba [T-S]  
Radio Moscow (World Service)  
Radio Polonia  
Radio Prague Int'l  
Radio Sofia  
Radio Tirana, Albania  
RTV Congolaise, Brazzaville [M-F]  
Swiss Radio Int'l  
0645  
Radio Romania Int'l

**0700 UTC**  
**(3:00 AM EDT, 12:00 AM PDT)**

BBC  
Christian Science Monitor  
Radio Australia  
Radio Havana Cuba [T-S]  
Radio Japan  
Radio Moscow  
Radio New Zealand Int'l [M-F]  
Radio Tirana, Albania  
Voice of Free China  
Voice of Myanmar  
0715  
Radio Havana Cuba\* [T-S]  
0730  
BBC (Africa)\* [M-A]  
Christian Science Monitor [M-F]  
HCJB  
Radio Austria Int'l  
Radio Havana Cuba [T-S]  
Radio Moscow (World Service)  
Radio Netherlands [M-A]  
0755  
Radio Japan [M-F]

**0800 UTC**  
**(4:00 AM EDT, 1:00 AM PDT)**

BBC  
Christian Science Monitor  
Radio Australia  
Radio Finland [M-F]  
Radio Korea  
Radio Moscow  
Radio New Zealand Int'l  
Voice of Indonesia

0805  
Radio Pyongyang  
0810  
Voice of Malaysia  
0830  
Christian Science Monitor [M-F]  
Radio Finland [T-A]  
Radio Moscow  
Radio Netherlands [M-A]  
Swiss Radio Int'l  
0840  
Voice of Greece [M-A]  
0855  
Radio Finland [M-F]  
Voice of Indonesia

**0900 UTC**  
**(5:00 AM EDT, 2:00 AM PDT)**

BBC  
BRT, Brussels [M-A]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Japan  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Voice of Nigeria  
0910  
Radio Beijing\*  
0915  
Radio Korea (News Service)  
0930  
Christian Science Monitor [M-F]  
Deutsche Welle (Africa)\* [M-F]  
Radio Moscow  
0950  
Radio For Peace Int'l [T-A]  
0955  
Radio Japan [M-F]

**1000 UTC**  
**(6:00 AM EDT, 3:00 AM PDT)**

All India Radio  
BBC  
Christian Science Monitor  
HCJB  
Radio Australia  
Radio Beijing  
Radio Moscow  
Radio New Zealand Int'l  
Radio Tanzania  
Swiss Radio Int'l  
Voice of America  
1010  
Radio Beijing\*  
1030  
Christian Science Monitor [M-F]  
Radio Austria Int'l [M-F]  
Radio Korea  
Radio Moscow  
Radio Netherlands [M-A]  
UAE Radio, Dubai  
1040  
Voice of Greece [M-A]  
1055  
All India Radio

**1100 UTC**  
**(7:00 AM EDT, 4:00 AM PDT)**

BBC  
CBC, Northern Quebec [A-S]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Japan  
Radio Jordan  
Radio Korea  
Radio Moscow  
Radio New Zealand Int'l  
Radio RSA  
Swiss Radio Int'l  
TWR, Bonaire [M-F]  
Voice of America  
Voice of Nigeria  
WWCR [M-F]  
1105  
Radio Pakistan (Special English)  
Radio Pyongyang  
1109  
BBC\*  
1110  
Radio Beijing\*  
Radio Belize [T-A]  
Radio Botswana [M-F]  
1115  
Radio Korea (News Service)  
1125  
Radio Belize [M]  
Radio Botswana [A-S]  
1130  
BRT, Brussels [S]  
Christian Science Monitor [M-F]  
Deutsche Welle\* [M-F]  
Radio Austria Int'l [M-F]  
Radio Finland [T-F]  
Radio Lesotho  
Radio Moscow  
Radio Netherlands [M-A]  
1135  
Radio Thailand  
1150  
Radio For Peace Int'l [T-A]  
Radio RSA  
1155  
Radio Japan [M-F]

**1200 UTC**  
**(8:00 AM EDT, 5:00 AM PDT)**

BBC  
CBC, Northern Quebec [A-S]  
Christian Science Monitor  
Radio Australia  
Radio Beijing  
Radio Bras, Brasilia [M-A]  
Radio Canada Int'l [M-F]  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Radio Polonia  
Radio Romania Int'l  
Radio Tashkent  
Radio Thailand  
Radio Yugoslavia  
Swiss Radio Int'l  
Voice of America

Voice of Nigeria  
WWCR [M-F]  
1210  
Radio Beijing\*  
1215  
Radio Korea  
1230  
Christian Science Monitor [M-F]  
Radio Cairo  
Radio Finland [M-F]  
Radio France Int'l  
Radio Moscow  
TWR, Bonaire [A]  
Voice of Turkey  
1235  
Voice of Greece  
1255  
WYFR (Network) [M-F]

**1300 UTC**  
**(9:00 AM EDT, 6:00 AM PDT)**

BBC ("Newshour")  
BRT, Brussels [M-A]  
CBC, Northern Quebec  
Christian Science Monitor  
Radio Australia  
Radio Beijing  
Radio Belize  
Radio Canada Int'l [S]  
Radio Finland [A]  
Radio Jordan  
Radio Moscow  
Radio Peace and Progress  
Radio Romania Int'l  
Radio Tanzania [A-S]  
Radio Tirana, Albania  
TWR, Bonaire [S-F]  
Voice of America  
WWCR [M-F]  
1305  
Radio Pyongyang  
1310  
Radio Beijing\*  
1325  
HCJB [M-F]  
1328  
Radio Cairo  
1330  
All India Radio  
Christian Science Monitor [M-F]  
Radio Austria Int'l  
Radio Canada Int'l  
Radio Finland [S-F]  
Radio Korea (News Service)  
Radio Moscow  
Radio Tashkent  
Swiss Radio Int'l  
UAE Radio, Dubai  
Voice of America (Special English)  
1346  
All India Radio (UN News) [A]

**1400 UTC**  
**(10:00 AM EDT, 7:00 AM PDT)**

BBC  
CBC, Northern Quebec [A-S]  
Christian Science Monitor  
Radio Australia

Radio Beijing  
Radio Belize [M-F]  
Radio Canada Int'l  
Radio France Int'l  
Radio Japan  
Radio Korea  
Radio Moscow  
Voice of America  
Voice of Nigeria  
WWCR [M-F]  
1405  
Radio Finland  
Radio Pyongyang  
1410  
Radio Beijing\*  
1425  
HCJB [M-F]  
1430  
Christian Science Monitor [M-F]  
Radio Austria Int'l [M-F]  
Radio Moscow  
Radio Netherlands [M-A]  
Radio Polonia  
Radio Sofia  
1445  
BBC (East Asia) (Special English) [M-F]  
Voice of Myanmar  
1455  
All India Radio

**1500 UTC**  
**(11:00 AM EDT, 8:00 AM PDT)**

BBC  
CBC, Northern Quebec [A-S]  
Christian Science Monitor  
Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Belize [M-A]  
Radio Canada Int'l  
Radio Japan  
Radio Jordan  
Radio Moscow  
Radio Portugal [M-F]  
Radio Romania Int'l  
Radio RSA  
Voice of America  
Voice of Nigeria  
1505  
Radio Pyongyang  
1510  
Radio Beijing\*  
1530  
Christian Science Monitor [M-F]  
Deutsche Welle\* [M-F]  
FEBA, Seychelles  
Radio Moscow  
Radio Tirana, Albania  
Swiss Radio Int'l  
Voice of Greece [M-A]  
1545  
Radio Korea (News Service)

**1600 UTC**  
**(12:00 PM EDT, 9:00 AM PDT)**

BBC  
CBC, Northern Quebec [A]  
Christian Science Monitor



## newsline

Deutsche Welle  
Radio Australia  
Radio Beijing  
Radio Canada Int'l  
Radio France Int'l  
Radio Jordan  
Radio Korea  
Radio Lesotho  
Radio Moscow  
Radio Polonia  
Radio RSA  
Radio Tanzania  
Voice of America  
WWCR [M-F]  
Yemen Radio  
1609  
BBC\*  
1610  
Radio Beijing\*  
Radio Botswana [M-F]  
1630  
Christian Science Monitor [M-F]  
Radio Austria Int'l  
Radio Moscow  
Radio Netherlands [M-A]  
Radio Peace and Progress  
Radio Polonia  
UAE Radio, Dubai  
Voice of America (except Africa)  
(Special English)  
WYFR (Network) [A]  
1635  
WYFR (Network) [M-F]

### 1700 UTC (1:00 PM EDT, 10:00 AM PDT)

BBC  
CBC, Northern Quebec [A]  
Christian Science Monitor  
Radio Australia  
Radio Beijing  
Radio Belize [M-F]  
Radio Canada Int'l  
Radio Japan  
Radio Moscow  
Radio Prague Int'l  
Radio RSA  
Voice of America  
Voice of Nigeria\*  
1705  
Radio Pyongyang  
1709  
BBC (Africa)\* [A-S]  
1710  
Radio Beijing\*  
1715  
Radio Korea (News Service)  
1725  
WYFR (Network) [A]  
1730  
BRT, Brussels  
Christian Science Monitor [M-F]  
Radio Moscow  
Radio Romania Int'l  
Radio Sofia  
Swiss Radio Int'l  
1740  
BBC (Africa)\* [M-F]  
1750  
Radio RSA

### 1800 UTC (2:00 PM EDT, 11:00 AM PDT)

All India Radio  
BBC  
CBC, Northern Quebec [M-F]  
Christian Science Monitor  
KVOH  
Radio Australia  
Radio Belize [M-F]  
Radio Bras, Brasilia [M-A]  
Radio Canada Int'l  
Radio Korea  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Radio Tanzania  
Voice of America  
Voice of Nigeria  
WWCR [A]  
1803  
Radio Jamahiriya, Libya  
1830  
Christian Science Monitor [M-F]  
Radio Belize  
Radio Finland  
Radio Moscow  
Radio Netherlands [M-A]  
Radio Polonia  
Radio Prague Int'l  
Radio Sofia  
Radio Tirana, Albania  
Radio Yugoslavia  
Swiss Radio Int'l  
Voice of America (Special English)  
1840  
SLBC, Sri Lanka  
Voice of Greece  
1847  
Radio Jamahiriya, Libya  
1855  
BBC (Africa)\* [M-F]  
WYFR (Network) [M-A]

### 1900 UTC (3:00 PM EDT, 12:00 PM PDT)

All India Radio  
BBC  
Christian Science Monitor [M-A]  
Deutsche Welle  
HCJB  
Kol Israel  
KVOH  
Radio Australia  
Radio Beijing  
Radio Canada Int'l  
Radio Havana Cuba [M-A]  
Radio Japan  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Radio Tanzania  
RAE, Buenos Aires [M-F]  
Spanish Foreign Radio  
Swiss Radio Int'l  
Voice of America  
1910  
Radio Beijing\*  
Radio Botswana  
1920  
Voice of Greece

1930  
Christian Science Monitor [M-F]  
Deutsche Welle\* [M-F]  
Radio Austria Int'l  
Radio Havana Cuba [M-A]  
Radio Moscow  
Radio Romania Int'l  
1935  
Radiotelevisione Italiana  
1945  
Radio Korea (News Service)  
1955  
Radio Finland

### 2000 UTC (4:00 PM EDT, 1:00 PM PDT)

BBC  
CBC, Northern Quebec [S-F]  
Christian Science Monitor  
KVOH  
Radio Australia  
Radio Beijing  
Radio Belize [M-F]  
Radio Havana Cuba [M-A]  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Radio Polonia  
Radio Portugal [M-F]  
Radio Prague Int'l  
Voice of America  
Voice of Nigeria  
Voice of Turkey  
2005  
Radio Pyongyang  
2010  
Radio Beijing\*  
2025  
Radio Havana Cuba\* [M-A]  
Radiotelevisione Italiana  
WYFR (Network) [M-F]  
2030  
Christian Science Monitor [M-F]  
Radio Havana Cuba [M-A]  
Radio Korea  
Radio Moscow  
Radio Netherlands [M-A]  
Radio Sofia  
WYFR (Network) [A]  
2045  
Radio Korea (News Service)  
2055  
Voice of Indonesia

### 2100 UTC (5:00 PM EDT, 2:00 PM PDT)

All India Radio  
BBC ("Newshour")  
BRT, Brussels  
CBC, Northern Quebec [S-F]  
Christian Science Monitor [M-A]  
Deutsche Welle  
KVOH  
Radio Australia  
Radio Beijing  
Radio Belize [M-F]  
Radio Budapest  
Radio Canada Int'l

## NOTES: September 1991

Last month, we published Radio Moscow's full program schedule in over a year. Sure enough, just a couple of days after we went to press in mid-July, we finally received Radio Moscow's newly revised May-to-September schedule! Thankfully, there were only a few discrepancies between that version and ours; sorry for any confusion...

Country music star Willie Nelson now has his own shortwave radio program! "Outlaw For Peace" airs, appropriately enough, on Radio For Peace International, at 0100 UTC Tuesdays through Saturdays...

Yemen Radio, a most unlikely listing, debuts this month in the program listings. The frequencies for the 1600 UTC broadcast, in case you're wondering, are 5970 and 7190 kHz. All we can say is good luck!

Radio Japan  
Radio Kiev  
Radio Moscow  
Radio New Zealand Int'l [S-F]  
Radio Portugal [M-F]  
Radio Prague Int'l  
Radio Romania Int'l  
Radio Yugoslavia  
Spanish Foreign Radio  
Swiss Radio Int'l  
Voice of America  
Voice of Nigeria  
WWCR [M-F]  
2110  
Radio Beijing\*  
2130  
Christian Science Monitor [M-F]  
Kol Israel  
Radio Cairo  
Radio Canada Int'l  
Radio Finland  
Radio Moscow  
Radio Sofia  
Swiss Radio Int'l  
WYFR (Network) [M-F]  
2150  
Radio For Peace Int'l [M-F]  
2155  
WYFR (Network) [M-A]

### 2200 UTC (6:00 PM EDT, 3:00 PM PDT)

All India Radio  
BBC  
CBC, Northern Quebec [M-F]  
Christian Science Monitor  
Radio Australia  
Radio Beijing  
Radio Canada Int'l  
Radio Havana Cuba [M-A]  
Radio Moscow  
Radio New Zealand Int'l  
Radio Peace and Progress  
Radiotelevisione Italiana  
Voice of America  
Voice of Free China  
Voice of Nigeria  
Voice of Turkey  
2208  
Voice of America (Caribbean)\*  
[M-F]

2210  
Radio Beijing\*  
2225  
Radio Havana Cuba\* [M-A]  
2230  
Christian Science Monitor [M-F]  
Radio Havana Cuba [M-A]  
Radio Moscow  
Radio Polonia  
Radio Tirana, Albania  
Radio Vilnius  
Voice of America (Special English)  
2233  
Radio Jamahiriya, Libya  
2245  
Voice of Greece

### 2300 UTC (7:00 PM EDT, 4:00 PM PDT)

BBC  
CBC, Northern Quebec [A]  
Christian Science Monitor [M-A]  
Radio Australia  
Radio Belize [M-F]  
Radio Canada Int'l  
Radio Finland [M-F]  
Radio Japan  
Radio Luxembourg  
Radio Moscow  
Radio New Zealand Int'l  
Radio Prague Int'l  
Radio Sofia  
Radio Vilnius  
Voice of America  
2305  
Radio Polonia  
Radio Pyongyang  
2315  
All India Radio  
2320  
Radio Thailand  
2330  
BRT, Brussels  
Christian Science Monitor [M-F]  
Radio Jamahiriya, Libya  
Radio Tirana, Albania  
2350  
Radio For Peace Int'l [M-F]  
2355  
Radio Japan [M-F]  
WRNO [W, F]



0000 UTC

[8:00 PM EDT/5:00 PM PDT]

## FREQUENCIES

0000-0100	ABC Brisbane	4920do	9660do		
0000-0100	ABC Perth	9610do			
0000-0100	All India Radio, Delhi	9535as	9910as	11715as	11745as
		15110as			
0000-0100	AWR Costa Rica	9725ca	11870ca		
0000-0030	BBC London	5965as	5975na	6005sa	6175na
		6195as	7145as	7325na	9580as
		9590na	9915na	11750sa	
11945as	11955as	12095na	15070na		
15260sa	15360pa	17830as			
0000-0100	CFCX Montreal	6005do			
0000-0100	CFRX Toronto	6070do			
0000-0100	TWHFAS Croatian Radio, Zagreb	7315eu	9495eu		
0000-0100	CSM World Svc, Boston	7395na	9850na	13760na	17555na
		17865va			
0000-0100	FEBC Manila	15480as			
0000-0100	KTNB Salt Lake City	15590am			
0000-0100	R. for Peace Int'l	7375na	13630na	15030na	21465na
0000-0100	Radio Australia	11880va	11930va	13605va	15160va
		15240va	15320va	17630va	17715va
		17750va	17795va	21740va	
0000-0100	Radio Beijing	15285am	17705am		
0000-0030mtwhf	Radio Canada Int'l	5960na	9755na	13760na	
0000-0100 sm	Radio Canada Int'l	5960na	9755na		
0000-0050	Radio Federal Yugoslavia	9620na	11735na		
0000-0100	Radio Havana Cuba	11950am			
0000-0100	Radio Kiev	11790na	13645na	15180na	15455na
		15485na	15525na		
0000-0100	Radio Korea, Seoul	15575na			
0000-0100	Radio Luxembourg	6090om	15350om		
0000-0100	Radio Moscow NAS	9480na	11690na	11710na	11730na
		11780na	11850na	11985na	12005na
		12050na	13605na	13775na	15140na
		15290na	15355na	15410na	15425na
		15480na	15550na	15570na	15580na
0000-0100	Radio Moscow NAS	15590na	15595na	16190na	17600na
		17620na	17675na	17730na	17850na
		17860na	17890na	21690na	21710na
		21790na	21845na		
0000-0100 smtwhf	Radio New Zealand Int'l	17770pa			
0000-0030 stwhfa	Radio Prague	7345na	11685na	11990na	
0000-0100	Radio Pyongyang	11335na	13775na	15115na	
0000-0100	Radio Thailand	4830as	9655as	11905as	
0000-0100	RTM Malaysia	7295do			
0000-0100	SBC Radio 1, Singapore	5010do	5052do	11940do	
0000-0100	SLBS, Sierra Leone	3316do			
0000-0100	Spanish Foreign Radio	9630na			
0000-0100	Voice of America	5995ca	6130ca	9455ca	9775ca
		9815ca	11580ca	11695ca	15205ca
0000-0100	Voice of America	7120as	9770as	11760as	15185as
		15290as	17735as	17820as	
			7315am	9495am	
0000-0100	WHRI Noblesville, Indiana				
0000-0100	WINB Red Lion, Penn.	15145eu			
0000-0100	WRNO New Orleans	7355am			
0000-0100	WWCR Nashville	7520na			
0000-0100	WYFR, Okeechobee, Florida	5985am			
0030-0100	BBC London	5965as	5975na	6005sa	6175na
		7135as	7325na	9580as	9590na
		9915na	11750sa	11955as	12095na
		15260sa	15360pa		
0030-0100	HCJB Quito, Ecuador	9745am	15155am	21455am	25950am
0030-0100	Hunan PBS Changsha China	4990do			
0030-0100	Radio Netherlands	6020am	6165am	15560am	
0030-0100	Sri Lanka Broadcasting Corp.	6005as	9720as	15425as	
0040-0050 twhf	R Nacional de Venezuela	9540om			
0050-0100	Vatican Radio	6150na	9605na		

## SELECTED PROGRAMS

## Sundays

- 0000 KSDA, Guam: Your Story Hour. Dramatized children's stories.
- 0000 Radio For Peace Int'l: Ram's Horn Productions. Political documentaries on Abbie Hoffman and the like; the '60s have returned!
- 0030 BBC: The Ken Bruce Show. Ken Bruce plays pop music, past and present.
- 0030 KSDA, Guam: Voice of Prophecy. H.M. Richards' devotional program.
- 0030 Radio For Peace Int'l: Living Enrichment Center. Life experiences and opportunities from a spiritual perspective.
- 0039 HCJB: DX Party Line. Rich McVicar presents news on shortwave radio and communications.

## Mondays

- 0000 KSDA, Guam: Music Scrapbook. See S 2300.
- 0000 Radio For Peace Int'l: Second Opinion. A weekly conversation with Erwin Knoll, editor of The Progressive.
- 0015 KSDA, Guam: Bible in Living Sound. See S 2315.
- 0030 BBC: In Praise Of God. Christian religious services and meditations.
- 0030 KSDA, Guam: Greatest Story Ever Told. A Bible reading.
- 0030 Radio For Peace Int'l: World Goodwill Forum. Goodwill organizations and their effects on the world.

- 0039 HCJB: Saludos Amigos. Ken MacHarg presents his program of international friendship.
- 0045 KSDA, Guam: Voice of Prophecy. See S 0030.

## Tuesdays

- 0000 KSDA, Guam: Music Scrapbook. See S 2300.
- 0000 Radio For Peace Int'l: FIRE. Programming produced by women worldwide on women's issues.
- 0015 KSDA, Guam: Bible in Living Sound. See S 2315.
- 0030 BBC: Panel Game. "The Litmus Test" contests pinks vs. blues in a science quiz (through Oct. 22nd).
- 0030 KSDA, Guam: Greatest Story Ever Told. See M 0030.
- 0039 HCJB: Current Affairs. See M 1639.
- 0045 KSDA, Guam: Voice of Prophecy. See S 0030.

## Wednesdays

- 0000 KSDA, Guam: Music Scrapbook. See S 2300.
- 0000 Radio For Peace Int'l: FIRE. See T 0000.
- 0015 KSDA, Guam: Bible in Living Sound. See S 2315.
- 0030 BBC: Omnibus. Topical features on almost any topic, from Dracula to drugs.
- 0030 KSDA, Guam: Greatest Story Ever Told. See M 0030.
- 0039 HCJB: Current Affairs. See M 1639.
- 0045 KSDA, Guam: Voice of Prophecy. See S 0030.

## Thursdays

- 0000 KSDA, Guam: Music Scrapbook. See S 2300.
- 0000 Radio For Peace Int'l: FIRE. See T 0000.

- 0015 KSDA, Guam: Bible in Living Sound. See S 2315.
- 0030 BBC: Comedy Show. See W 1530.
- 0030 KSDA, Guam: Greatest Story Ever Told. See M 0030.
- 0039 HCJB: Current Affairs. See M 1639.
- 0045 KSDA, Guam: Voice of Prophecy. See S 0030.

## Fridays

- 0000 KSDA, Guam: Music Scrapbook. See S 2300.
- 0000 Radio For Peace Int'l: FIRE. See T 0000.
- 0015 KSDA, Guam: Bible in Living Sound. See S 2315.
- 0030 BBC: Music Feature. In "The Anatomy Of Jazz," Steve Race dissects the musical form of jazz (through 27th).
- 0030 KSDA, Guam: Greatest Story Ever Told. See M 0030.
- 0039 HCJB: Current Affairs. See M 1639.
- 0045 KSDA, Guam: Voice of Prophecy. See S 0030.

## Saturdays

- 0000 KSDA, Guam: Your Story Hour. See S 0000.
- 0000 Radio For Peace Int'l: FIRE. See T 0000.
- 0030 BBC: From The Weeklies. A review of the British weekly press.
- 0030 KSDA, Guam: Power to Cope. See S 1630.
- 0039 HCJB: Current Affairs. See M 1639.
- 0045 BBC: Recording Of The Week. See S 0315.







0200 UTC

[10:00 PM EDT/7:00 PM PDT]

## FREQUENCIES

0200-0300	ABC Brisbane	4920do	9660do							0200-0300	Radio New Zealand Int'l	17770pa							
0200-0300	ABC Perth	200	6070do	9610do						0200-0230 sm	Radio Norway	15360na							
0200-0230	BBC London	5975na	6005sa	6175na	6195eu					0200-0300	Radio Romania Int'l	5990am	6155am	9570am	11830am				
		7135as	7325na	9410eu	9580as							11940am	15380am						
		9590na	9670me	9915na	11750sa					0200-0230	Radio Sweden	9695na	11705na						
		11955as	12095va	15260sa	15280as					0200-0300	Radio Thailand	4830as	9655as	11905as					
		15360pa	15380as	21715as						0200-0300 smtwh	RTM Malaysia	7295do							
0200-0300	CKZU Vancouver	6160do									SBC Radio 1, Singapore	5052do	11940do						
0200-0300	CSM World Svc, Boston	9455eu	9850eu	13760eu	17555eu					0200-0300	SLBS, Sierra Leone	3316do							
		17865va								0200-0230	Sri Lanka B'casting Corp.	6005as	9720as	15425as					
0200-0250	Deutsche Welle	7285as	9615as	9690as	11945as					0200-0230	Swiss Radio Int'l	6125am	6135am	9650am	9885am				
		11965as	15235as									12035am	17730am						
0200-0230	FEBC Manila	15480as								0200-0300	V. of Free China, Taiwan	5950na	9680na	9765pa	11740ca				
0200-0300	HCJB Quito	9745na	15155na	17875sa						0200-0230 mtwhf	Voice of America	11860as	15345as						
0200-0300 AS	KSDA Guam	13720as										5995ca	9775ca	9815ca	11580ca				
0200-0300	KTBN Salt Lake City	7510am								0200-0300	Voice of America	15205ca							
0200-0300	R. for Peace Int'l	7375na	13630na	15030na	21465na							7115as	7205as	11705as	15115as				
0200-0300	Radio Australia	11880va	11930va	15160va	15240va					0200-0230 mtwhfa	Voice of Kenya	15160as	15250as	17740as	21550as				
		15320va	17630va	17715va	17750va							4935do							
		17795va	21525va	21740va	21775va					0200-0300	WHRI Noblesville	7315na	9495sa						
0200-0300	Radio Budapest	6110na	9835na	11910na						0200-0300	WINB Red Lion	15145eu							
0200-0300	Radio Cairo	9475na	9675na							0200-0300	WRNO New Orleans	7355am							
0200-0300 twhfa	Radio Canada Int'l	9535ca	9755ca	11845ca	11940ca					0200-0300	WWCR Nashville	7520na							
		13720ca								0200-0300	WYFR Okeechobee	6065na	9505am	15440na					
0200-0300	Radio Cultura, Guatemala	3300do								0230-0300	BBC London	5975na	6005sa	6175na	6195eu				
0200-0230	Radio Finland	15185na	15430na									7135me	7325na	9410eu	9670me				
0200-0300	Radio Havana Cuba	11950am								0230-0300 twhfa	Radio Portugal	9915na	11750sa	11955me	12095va				
0200-0300	Radio Luxembourg	15350om								0230-0300	Radio Tirana	15260sa	15280as	15360pa	21715as				
0200-0300	Radio Moscow NAS	4895na	11690va	11710na	11780va							9545as	15115as	17640as					
		11835va	11850na	11980va	12005va					0230-0300 s	Voice of Kenya	9555sa	9600na	9705na	11840sa				
		12050va	13605va	15140va	15290va					0240-0300	Radio 2, Zambia	9580na	11825na						
		15315va	15320va	15410va	15415va					0245-0300	Radio Korea		9720as	15425as					
		15425va	15480va	15540va	15550va					0249-0300	Radio Yerevan, Armenia	11790na	13645na	15180na	15455na				
0200-0300	Radio Moscow NAS	15580va	15590va	15595va	16190va							15485na							
		17600va	17620va	17730va	17850va					0250-0300	Vatican Radio	7305na	9615na	11625na					
		17860va	17890va	21635va	21690va														
		21790va	21845va																

## SELECTED PROGRAMS

## Sundays

- 0200 HCJB: Pause For Good News. Details not available at press time.
- 0200 KSDA, Guam: AWR Magazine. Stories about science, nature, discoveries, and health matters.
- 0200 Radio For Peace Int'l: RFPI's Mailbag. James and Debra Latham present listener letters, comments, questions, and advice.
- 0205 HCJB: Hour Of Decision. Billy Graham's radio evangelical program.
- 0215 KSDA, Guam: Digging Up The Past. Details unavailable at press time.
- 0230 BBC: Feature. This month, "It's The Law!" continues to peruse the world's legal codes (through 22nd), with "Something To Die For" profiling famous martyrs (29th).
- 0230 KSDA, Guam: DX Asiawaves. News from the world of shortwave radio.
- 0230 Radio For Peace Int'l: Amnesty International Reports or The Other Americas Radio. Human rights reports, or issues affecting Central and South America.
- 0239 HCJB: DX Party Line. See S 0039.
- 0245 KSDA, Guam: Probe. A Bible study program.

## Mondays

- 0200 HCJB: HCJB Today. News about the ministries of HCJB.
- 0200 Radio For Peace Int'l: New Dimensions Radio. Innovative thinkers and ideas on the leading edge of change.
- 0230 BBC: Composer Of The Month. Profiles of famous composers; this month, the great Czech Antonin

Dvorak.

0239 HCJB: Saludos Amigos. See M 0039.

## Tuesdays

- 0200 HCJB: Joni And Friends. Joni Erickson-Tada presents help and advice, especially for the disabled.
- 0200 Radio For Peace Int'l: A New American Place. The visionary pioneers, poets, and innovators who built America.
- 0205 HCJB: Guidelines For Family Living. See M 1115.
- 0215 HCJB: Rendezvous. See M 1100.
- 0230 BBC: Sports International. Topical features and reports on sports the world over.
- 0230 Radio For Peace Int'l: Steppin' Out Of Babylon. Sue Supriano speaks with individuals who fight for freedom and justice.
- 0239 HCJB: Current Affairs. See M 1639.

## Wednesdays

- 0200 HCJB: Joni And Friends. See T 0200.
- 0205 HCJB: Guidelines For Family Living. See M 1115.
- 0215 HCJB: Rendezvous. See M 1100.
- 0230 BBC: Development '91. Aid and development issues for developing nations.
- 0230 Radio For Peace Int'l: World Of Radio. See S 0130.
- 0239 HCJB: Current Affairs. See M 1639.

## Thursdays

- 0200 HCJB: Joni And Friends. See T 0200.
- 0200 Radio For Peace Int'l: Feature. Programming produced by Radio Canada International, Radio Netherlands, or the Red Cross Broadcasting Svc.
- 0205 HCJB: Guidelines For Family Living. See M 1115.

0215 HCJB: Rendezvous. See M 1100.

0230 BBC: Assignment. A weekly examination of topical issues, from Batman to the Amazon (except 5th: "Leaders And Leadership," conversations with great world leaders).

0230 Radio For Peace Int'l: New Dimensions Radio. See M 0200.

0239 HCJB: Current Affairs. See M 1639.

## Fridays

- 0200 HCJB: Joni And Friends. See T 0200.
- 0205 HCJB: Guidelines For Family Living. See M 1115.
- 0215 HCJB: Rendezvous. See M 1100.
- 0230 BBC: Drama. See H 1130.
- 0230 Radio For Peace Int'l: Alternative Radio. Current political issues facing Latin America.
- 0239 HCJB: Current Affairs. See M 1639.

## Saturdays

- 0200 HCJB: Joni And Friends. See T 0200.
- 0200 KSDA, Guam: Listener Mailbox. Responses to listener letters.
- 0200 Radio For Peace Int'l: World Citizens' Assembly. See T 0300.
- 0205 HCJB: Guidelines For Family Living. See M 1115.
- 0215 HCJB: Rendezvous. See M 1100.
- 0215 KSDA, Guam: Focus on Living. Life's problems and their solutions.
- 0230 BBC: People And Politics. The background to the British political scene.
- 0230 KSDA, Guam: Power to Cope. See S 1630.
- 0230 Radio For Peace Int'l: Holding Our Ground. Native Alaskans make their case for sovereignty.
- 0239 HCJB: Current Affairs. See M 1639.



0300 UTC

[11:00 PM EDT/8:00 PM PDT]

## FREQUENCIES

0300-0400	ABC Brisbane	4920do	9660do				
0300-0400	ABC Perth	9610do					
0300-0330	BBC London	3255af	5975na	6005af	6180eu		
		6190af	6195eu	7135me	9410eu		
		9600af	9670me	11760me	11955me		
		12095eu	15280as	15310as	15360pa		
		15380as	15420af	15590af	21715as		
0300-0330	BBC London	9915na	6175na	7325na	15260sa		
		11750sa	6005sa				
0300-0400	CFCX Montreal	6005do					
0300-0400	CFRX Toronto	6070do					
0300-0400	CKZU Vancouver	6160do					
0300-0400	CSM World Svc, Boston	9455na	9850na	13760na	17555na		
		17865va					
0300-0350	Deutsche Welle	6085na	6145na	9545na	11810na		
		11890na	13610na	13770na	15205na		
		15425na					
0300-0400	HCJB Quito	9745na	15155na	21545na			
0300-0400	KTBN Salt Lake City	7510am					
0300-0400	KVOH Los Angeles	9785na					
0300-0400	R. for Peace Int'l	7375na	13630na	15030na	21485na		
0300-0330	Radio Australia	11880va	11930va	15160va	15240va		
		15320va	17630va	17715va	17750va		
		17795va	21525va	21740va	21775va		
		11715am	15285am	11715am			
0300-0400	Radio Beijing	9475na	9675na				
0300-0330	Radio Cairo						
0300-0400	Radio Cultura, Guatemala		3300do				
0300-0400	Radio Havana Cuba	15140am					
0300-0330	Radio Japan	15325na	17825na	21610na			
0300-0400	Radio Moscow NAS	4895na	9720va	11675va	11690va		
		11710na	11710va	11780va	11800va		
		11850na	11850va	11980va	12035va		
		12050va	13605va	15140va	15280va		
		15315va	15320va	15410va	15415va		
0300-0400	Radio Moscow NAS	15425va	15450va	15480va	15540va		
		15550va	15580va	15590va	15595va		
		16190va	17560va	17600va	17620va		
		17710va	17730va	17850va	17860va		
		17890va	21635va	21690va	21790va		
0300-0400	Radio New Zealand Int'l	17770pa					
0300-0330	Radio Prague	5930na	7345na	11685na			
0300-0400	Radio Sofia, Bulgaria	11720eu	15160af	17825af			
0300-0400	Radio Tanzania	5985af	9685af	11765af			
0300-0400	Radio Thailand	4830as	9655as	11905as			
0300-0400 smtwh	RTM Malaysia	7295do					
0300-0400	SBC Radio 1, Singapore	5052do	11940do				
0300-0400	SLBS, Sierra Leone	3316do					
0300-0400	Sri Lanka B'casting Corp.	9720as	15425as				
0300-0400	TIFC Costa Rica	5055ca					
0300-0400	Trans World Radio Boniare		9535am	11930am			
0300-0400	V. of Free China, Taiwan	5950na	9680na				
0300-0315	Vatican Radio	7305na	9615na	11625na			
0300-0330	Voice of America	6095va	15160va	15195va	17810va		
		17865va					
0300-0400	Voice of America	6035af	9575af	11835af	15115af		
		17715af	21600af				
0300-0400	Voice of Kenya	4935do					
0300-0400	Voice of Turkey	9445na	17880as				
0300-0400	WHRI Noblesville	7315na	9495sa				
0300-0400	WRNO New Orleans	7355am					
0300-0400	WWCR Nashville	7520na					
0300-0400	WYFR Okeechobee	6065na	9505na				
0310-0325	Vatican Radio	9635na					
0330-0400	BBC London	3255af	5975na	6005af	6180eu		
		6190af	6195eu	7135me	9410eu	9600af	
		9915na	11740af	11760me	11955me		
		12095eu	15280as	15310as	15420af		
		17885af	21715as				
0330-0400	Radio Australia	11880va	11930va	15160va	15240va		
		15320va	15530va	17630va	17715va		
		17795va	21525va	21740va	21775va		
		6165am	9590am				
0330-0400	Radio Netherlands	9695na	11705na				
0330-0400	Radio Sweden	9760na	11825na				
0330-0400	Radio Tirana	11945na	13675na	15400na	15435na		
0330-0400	UAE Radio, Dubai	9540om					
0340-0350 twhf	R Nacional de Venezuela	9395am	9420am	11645am			
0340-0350 mtwhfa	Voice of Greece	11905as	15330as	17795as			
0350-0400	RAI, Rome						

## SELECTED PROGRAMS

## Sundays

- 0300 Radio For Peace Int'l: Consider The Alternatives. High-level experts on current events topics.
- 0315 BBC: Recording Of The Week. A personal choice from the new classical music releases.
- 0330 BBC: From Our Own Correspondent. Reporters comment on the background to the news.
- 0330 HCJB: Sports Spectrum. Chuck Swirsky looks at the people of the sports world.
- 0330 Radio For Peace Int'l: Radio New York International. A weekly two-hour show produced by the well-known pirate radio station.
- 0350 BBC: Write On. Listener letters, opinions, and questions.

## Mondays

- 0300 Radio For Peace Int'l: SCAN. Christian stories and contemporary music.
- 0315 BBC: Good Books. Recommendations of books to read.
- 0330 BBC: Anything Goes. See S 1430.
- 0330 HCJB: Calvary Hour. Details not available at press time.
- 0330 Radio For Peace Int'l: Sound Currents Of The

Earth. Jim Bean presents new age, world, and electronic music.

## Tuesdays

- 0300 HCJB: Dateline '90. See T 0100.
- 0300 Radio For Peace Int'l: World Citizens' Assembly. See T 0300. One group's efforts to create an attitude of world citizenship.
- 0315 BBC: The World Today. See M 1645.
- 0330 BBC: John Peel. Newly released albums and singles from the contemporary music scene.
- 0330 HCJB: Insight For Living. See M 1130.
- 0330 Radio For Peace Int'l: United Nations. See S 2330.
- 0340 Radio For Peace Int'l: Undercurrents. See S 0550.

## Wednesdays

- 0300 HCJB: Happiness Is. See W 0100.
- 0300 Radio For Peace Int'l: RFPI's Mailbag. See S 0200.
- 0315 BBC: The World Today. See M 1645.
- 0330 BBC: Discovery. An in-depth look at scientific research.
- 0330 HCJB: Insight For Living. See M 1130.
- 0330 Radio For Peace Int'l: AIDS In Focus. A look at the latest developments in living with and fighting the deadly disease.
- 0340 Radio For Peace Int'l: Undercurrents. See S 0550.

## Thursdays

- 0300 HCJB: Ham Radio Today. See H 0100.
- 0315 BBC: The World Today. See M 1645.
- 0330 BBC: Quiz. See M 1215.
- 0330 HCJB: Insight For Living. See M 1130.
- 0330 Radio For Peace Int'l: United Nations. See S 2330.
- 0340 Radio For Peace Int'l: Undercurrents. See S 0550.

## Fridays

- 0300 HCJB: Happiness Is. See W 0100.
- 0315 BBC: The World Today. See M 1645.
- 0330 BBC: Focus On Faith. Comment and discussion on major issues in various religions.
- 0330 HCJB: Insight For Living. See M 1130.
- 0330 Radio For Peace Int'l: UNESCO. See T 0130.
- 0340 Radio For Peace Int'l: Undercurrents. See S 0550.

## Saturdays

- 0300 HCJB: Musica Del Ecuador. See A 0100.
- 0300 Radio For Peace Int'l: World Of Radio. See S 0130.
- 0315 BBC: The World Today. See M 1645.
- 0330 BBC: The Vintage Chart Show. Paul Burnett with past Top 20 pop music hits.
- 0330 HCJB: Insight For Living. See M 1130.
- 0330 Radio For Peace Int'l: United Nations. See S 2330.
- 0340 Radio For Peace Int'l: Undercurrents. See S 0550.



0400 UTC

[12:00 AM EDT/9:00 PM PDT]

## FREQUENCIES

0400-0500	ABC Brisbane	4920do	9660do	0400-0500 smtwhf	Radio New Zealand Int'l	17770pa	
0400-0500	ABC Perth	9610do		0400-0430 sm	Radio Norway	11865na	
0400-0430	BBC London	3255af	3955eu 5975na 6180eu	0400-0430	Radio Prague	5930na	7345na 11685na
		6190af	6195eu 7105af 7230eu	0400-0500	Radio Pyongyang	15180as	15230as 17765as
		9410eu	9600af 9610af 9915na	0400-0430	Radio Romania Int'l	5990am	9510am 9570am 11830am
		11760me	15070va 15280as 15310as			11940am	15380am
		15420af	15590eu 17885af 21715as	0400-0500	Radio RSA	5960af	11860af 11920af
0400-0430	BBC London	6005af	11955me 12095va	0400-0500	Radio Sofia, Bulgaria	11720eu	15160af 17825af
0400-0500	CFCX Montreal	6005do		0400-0430	Radio Tanzania	5985af	9685af 11765af
0400-0500	CFRX Toronto	6070do		0400-0430	Radio Thailand	4830as	9655as 11905as
0400-0500	CKZU Vancouver	6160do		0400-0410	RAI, Rome	11905as	15330as 17795as
0400-0500	CSM World Svc, Boston	9455na	9840af 13760na 17555as	0400-0425	RAI, Rome	5990me	7275me
		17780as		0400-0500 smtwh	RTM Malaysia	7295do	
0400-0450	Deutsche Welle	6145af	7150af 7225af 9565af	0400-0500	SBC Radio 1, Singapore	5052do	11940do
		9765af	11765af 11890af 13610af	0400-0500	SLBS, Sierra Leone	3316do	
		13770af	15425af	0400-0430	Sri Lanka B'casting Corp.	9720as	15425as
0400-0500	HCJB Quito	9745na	15155na	0400-0430	Swiss Radio Int'l	6135am	9650am 9885am 12035am
0400-0500	KTN Salt Lake City	7510am		0400-0430	Trans World Radio Bonaire	9535am	11930am
0400-0500	KVOH Los Angeles	9785am		0400-0430	Voice of America	5995eu	6040eu 6140eu 7170eu
0400-0500	R. for Peace Int'l	7375na	13630na 15030na 21465na			7200eu	11825eu 15115eu 15205eu
0400-0500	Radio 2, Zambia	6165do	7235do	0400-0430	Voice of America	6035af	9575af 11835af 15350af
0400-0500	Radio Australia	11880va	11930va 15160va 15240va			17715af	21600af
		15320va	15530va 17630va 17715va	0400-0500	Voice of America	5995va	6140va 7170va 7200va
		17795va	21525va 21740va 21775va			9715va	
0400-0500	Radio Beijing	11685am	11840am	0400-0500	Voice of Kenya	4935do	
0400-0430	Radio Canada Int'l	15275me		0400-0500	WHRI Noblesville	7315na	9495sa
0400-0500	Radio Canada Int'l	11925as		0400-0500 smtwhf	WMLK Bethel	9465eu	
0400-0425	Radio Cultura, Guatemala	3300do		0400-0500	WRNO New Orleans	7355am	
0400-0500	Radio Cultura, Guatemala	3300do		0400-0500	WWCR Nashville	7520na	
0400-0450	Radio Havana Cuba	9505am	9750am 11760am 11820am	0400-0500	WYFR Okeechobee	6065na	9505na
0400-0500	Radio Moscow	11630va	11675va 11690va 11710va	0430-0500	BBC London	3255af	3955eu 5975na 6005af
		11780va	11850va 11980va 11995va			6180eu	6190af 6195eu 7230eu
		12055va	13775va 15140va 15210va	0430-0500 mtwhf	NBC Windhoek, Namibia	3270af	3290af
		15280va	15315va 15415va 15450va	0430-0500	Radio Nigeria	3326do	4990do
0400-0500	Radio Moscow	15480va	15525va 15535va 15540va	0430-0500	Radio Tirana	9480af	11835af
		15550va	15590va 17560va 17600va	0430-0500 s	Radio Zambia Int'l	9505af	11880af 17895af
		17620va	17635va 17640va 17710va	0430-0500	TWR Swaziland	5055af	5965af 9655af 11750af
		17730va	17850va 17860va 17890va	0430-0500	Voice of America	3980eu	5995eu 6040eu 6140eu
		21475va	21565va 21625va 21630va			7170eu	7200eu 11825eu 15205eu
0400-0500	Radio Moscow NAS West Cst	21690va	21725na 21790va 21845na			6035af	9575af 15115af 17715af
		9635na	12050na 13605na	0430-0500	Voice of America	21600af	
		13645na	15180na 15410na 15425na	0432-0500	FEBA Seychelles	17810me	
		15455na	15580na 15595na 16190na	0450-0500	Radio Havana Cuba	9750am	11760am 11820am
0400-0425	Radio Netherlands	6165am	9590am				

## SELECTED PROGRAMS

## Sundays

- 0400 HCJB: Radio Reading Room. Readings from new Christian books.
- 0430 BBC: Pop Music. "B'-Side Beat" looks at back sides — of famous records, that is (through Oct. 27th).
- 0445 BBC: Talks. Hear a "Letter From..." around the UK (1st/8th/15th), and then try your hand at "Mastering Photography" (through November 10th).

## Mondays

- 0400 HCJB: Science And Scripture. Details not available at press time.
- 0415 HCJB: Get Set. The latest from the world of sports.
- 0430 BBC: Off The Shelf. This month's serialized readings include Umberto Eco's "The Name Of The Rose" (2nd-6th); H.G. Wells' "The War Of The Worlds" (9th-18th); George Eliot's "Silas Marner" (through October 18th).
- 0430 Radio Finland: Business Monday. See S 2300.
- 0430 Radio For Peace Int'l: World Of Radio. See S 0130.
- 0445 BBC: Andy Kershaw's World Of Music. Exotic music from the world over.

## Tuesdays

- 0400 HCJB: Psychology For Living. Christian advice on issues of today.
- 0400 Radio For Peace Int'l: New Dimensions Radio. See M 0200.
- 0415 HCJB: Chords Of Love. Details not available at press time.
- 0430 BBC: Off The Shelf. See M 0430.
- 0445 BBC: Europe's World. Life in Europe and its links with the rest of the world.

## Wednesdays

- 0400 HCJB: Wonderful Words Of Life. Messages from the Salvation Army.
- 0400 Radio For Peace Int'l: World Citizens' Hour. A wide variety of opinions and types of programs, as submitted by the citizens of the world.
- 0415 HCJB: Answers. Answers to questions on science and the Bible.
- 0430 BBC: Off The Shelf. See M 0430.
- 0445 BBC: Country Style. See W 0145.

## Thursdays

- 0400 HCJB: Let My People Think. A program addressing questions of today's thinker.

- 0400 Radio For Peace Int'l: WINGS. Issues and news affecting women.
- 0430 BBC: Off The Shelf. See M 0430.
- 0430 Radio For Peace Int'l: Common Ground. International relations and related political and social issues.
- 0445 BBC: From Our Own Correspondent. See S 0330.

## Fridays

- 0400 HCJB: Christian Brotherhood Hour. Christian messages of inspiration.
- 0400 Radio For Peace Int'l: Living Enrichment Center. See S 0030.
- 0430 BBC: Off The Shelf. See M 0430.
- 0430 Radio For Peace Int'l: UNESCO. See T 0130.
- 0445 BBC: Music. See T 0130.

## Saturdays

- 0400 HCJB: Unshackled. The melodrama about lives changed by religion.
- 0400 Radio For Peace Int'l: New Dimensions Radio. See M 0200.
- 0430 BBC: Here's Humph! See A 0145.
- 0445 BBC: Worldbrief. See F 2315.



0500 UTC

[1:00 AM EDT/10:00 PM DT]

## FREQUENCIES

0500-0600	ABC Brisbane	4920do	9660do		
0500-0600	ABC Perth	9610do			
0500-0530	BBC London	3255af	3955eu	6005af	6180as
		6190af	6195eu	7230eu	9410eu
		9600af	9640na	11760me	12095va
		15070as	15310as	15400af	15420af
		15590va	17885af	21470af	21715as
0500-0530	BBC London	5975na	15280as		
0500-0600	CFCX Montreal	6005do			
0500-0600	CFRX Toronto	6070do			
0500-0600	CKZU Vancouver	6160do			
0500-0530	CRTV Buea	3970do			
0500-0600	CSM World Svc, Boston	9455eu	9840eu	13760eu	17555eu
		17780va			
0500-0550	Deutsche Welle	5960na	6120na	9700na	9670na
		11705na	11890na	13610na	13790na
0500-0600	HCJB Quito	9745na	15155na		
0500-0600	KTNB Salt Lake City	7510am			
0500-0600	KVOH Los Angeles	9785am			
0500-0510 w	Malawi B'casting Corp.	3381do			
0500-0600 mtwhf	NBC Windhoek, Namibia		3270af	3290af	
0500-0600	R. for Peace Int'l	7375na	13630na	15030na	21465na
0500-0600	Radio 2, Zambia	6165do	7235do		
0500-0600	Radio Australia	11880va	11930va	15160va	15240va
		15320va	15530va	17630va	17715va
		17795va	21525va	21740va	21775va
0500-0600	Radio Beijing	11840am			
0500-0600 sa	Radio E. Africa, Eq Guinea		9585af		
0500-0600	Radio Havana Cuba	9750am	11760am	11820am	
0500-0600	Radio Japan	17765na	17810na	17825na	17890na
		21610na			
0500-0510	Radio Lesotho	4800do			
0500-0600	Radio Moscow	11675va	11690va	11710va	11980va
		11995va	13775va	15140va	15210va
		15280va	15315va	15320va	15415va
		15450va	15525va	15535va	15540va
		15545va	15550va	15590va	17560va
0500-0600	Radio Moscow	17600va	17620va	17625va	17635va
		17640va	17710va	17730va	17850va
		17860va	17890va	21475va	21625va
		21630va	21635va	21645va	21690va
		21725va	21740va	21790va	21845va
0500-0600	Radio Moscow NAS WEst Cst		9635na	12050na	13605na
		13645na	15180na	15410na	15425na
		15455na	15595na	16190na	
0500-0600	Radio New Zealand Int'l	17770pa			

0500-0600	Radio Nigeria	3326do	4990do		
0500-0515	Radio Sofia, Bulgaria	11720eu	15160af	17825af	
0500-0600	Radio Thailand	4830as	9655as	11905as	
0500-0600 s	Radio Zambia Int'l	9505af	11880af	17895af	
	RTM Malaysia	7295do			
0500-0600	SBC Radio 1, Singapore	5052do	11940do		
0500-0600	SLBS, Sierra Leone	3316do			
0500-0600	Spanish Foreign Radio	9630na			
0500-0530	TWR Swaziland	5965af	9655af	11750af	
0500-0530	Vatican Radio	6185eu	6248eu	17710af	17730af
		21650af			
0500-0530	Voice of America	3980eu	5995eu	6040eu	6140eu
		7170eu	7200eu	11825eu	15205eu
0500-0600	Voice of America	5995va	6060va	6140va	7170va
		7200va	9670va	9700va	9715va
		11825va	15205va		
0500-0600	Voice of America	6035af	9575af	15115af	17715af
0500-0600	Voice of Kenya	4935do			
0500-0600	Voice of Nigeria	7255af			
0500-0600	WHRI Noblesville	7315na	9495sa		
0500-0600	WINB Red Lion	15145eu			
0500-0600	WRNO New Orleans	7355am			
0500-0600	WWCR Nashville	7520na			
0500-0600	WYFR Okeechobee	5985na	11580am	15566eu	
0510-0515 w	Radio Botswana	5955af	7255af		
0515-0600 mtwhf	Radio Canada Int'l	6050eu	6150eu	7295eu	9750eu
		11775eu	17840eu		
0524-0600 f	Radio 2, Accra, Ghana	3366do			
0526-0600	Radio 1, Accra, Ghana	4915do			
0530-0600	BBC London	3255af	3955eu	5975na	6005af
		6180as	6190af	6195eu	7230eu
		9410eu	9600af	9640na	11760me
		12095va	15070as	15310as	15400af
		15420af	15590va	17885af	21470af
0530-0600	BBC London	15280as	21715as		
0530-0600	Cameroon Radio-TV	4850do			
0530-0600	Guizhou PBS Guiyang China	3260do	7275do		
0530-0600	Radio Romania Int'l	15340af	15380af	17720af	17745af
		17790af	21665af		
0530-0600	Radio Tirana	7205eu	9500eu		
0530-0600	TWR Swaziland	5965af	11750af		
0530-0600	UAE Radio, Dubai	15435as	17830as	21700as	
0530-0600	Voice of America	3980eu	5995eu	6040eu	6060eu
		6140eu	7170eu	7200eu	11825eu
		15205eu			
0545-0600	Radio Buea, Cameroon	3970do			

## SELECTED PROGRAMS

## Sundays

- 0509 BBC: Twenty-Four Hours. Analysis of the main news of the day.
- 0509 HCJB: DX Party Line. See S 0039.
- 0530 BBC: World Business Review. The previous week's news and upcoming events.
- 0530 Radio For Peace Int'l: The World In Review. A review of the week's news, produced by the United Nations.
- 0540 BBC: Words Of Faith. Speakers from various faiths discuss scripture and their beliefs.
- 0545 BBC: Letter From America. Alistair Cooke presents his unique reflections on the USA.
- 0550 Radio For Peace Int'l: Undercurrents. An investigative look at US policy at home and abroad.

## Mondays

- 0500 Radio For Peace Int'l: Food For The Thoughtful. See S 2300.
- 0509 BBC: Twenty-Four Hours. See S 0509.
- 0509 HCJB: Saludos Amigos. See M 0039.
- 0530 BBC: Waveguide. Tips on how to hear the BBC better.
- 0530 Radio For Peace Int'l: United Nations. See S 2330.
- 0540 BBC: Words Of Faith. See S 0540.

- 0545 BBC: Recording Of The Week. See S 0315.
- 0550 Radio For Peace Int'l: Undercurrents. See S 0550.

## Tuesdays

- 0500 Radio For Peace Int'l: Peace Talks. See M 2300.
- 0509 BBC: Twenty-Four Hours. See S 0509.
- 0509 HCJB: Current Affairs. See M 1639.
- 0530 BBC: World Business Report. See M 2305.
- 0530 HCJB: Dateline '90. See T 0100.
- 0530 Radio For Peace Int'l: United Nations. See S 2330.
- 0540 BBC: Words Of Faith. See S 0540.
- 0545 BBC: The World Today. See M 1645.

## Wednesdays

- 0500 Radio For Peace Int'l: UNESCO. See T 0130.
- 0509 BBC: Twenty-Four Hours. See S 0509.
- 0509 HCJB: Current Affairs. See M 1639.
- 0530 BBC: World Business Report. See M 2305.
- 0530 HCJB: Happiness Is. See W 0100.
- 0530 Radio For Peace Int'l: Headlines You May Have Missed or United Nations. See T 2330.
- 0540 BBC: Words Of Faith. See S 0540.
- 0545 BBC: The World Today. See M 1645.

## Thursdays

- 0500 Radio For Peace Int'l: World Peace And Responsibility. See M 0130.
- 0509 BBC: Twenty-Four Hours. See S 0509.

- 0509 HCJB: Current Affairs. See M 1639.
- 0530 BBC: World Business Report. See M 2305.
- 0530 HCJB: Ham Radio Today. See H 0100.
- 0530 Radio For Peace Int'l: United Nations. See S 2330.
- 0540 BBC: Words Of Faith. See S 0540.
- 0545 BBC: The World Today. See M 1645.

## Fridays

- 0500 Radio For Peace Int'l: Amnesty International Reports or The Other Americas Radio. See S 0230.
- 0509 BBC: Twenty-Four Hours. See S 0509.
- 0509 HCJB: Current Affairs. See M 1639.
- 0530 BBC: World Business Report. See M 2305.
- 0530 HCJB: Happiness Is. See W 0100.
- 0530 Radio For Peace Int'l: The Neumaier Report or United Nations. See H 2330.
- 0540 BBC: Words Of Faith. See S 0540.
- 0545 BBC: The World Today. See M 1645.

## Saturdays

- 0500 Radio For Peace Int'l: Voices Of Our World. See F2300.
- 0509 BBC: Twenty-Four Hours. See S 0509.
- 0509 HCJB: Current Affairs. See M 1639.
- 0530 BBC: World Business Report. See M 2305.
- 0530 HCJB: Musica Del Ecuador. See A 0100.
- 0530 Radio For Peace Int'l: United Nations. See S 2330.
- 0540 BBC: Words Of Faith. See S 0540.
- 0545 BBC: The World Today. See M 1645.



0600 UTC

[2:00 AM EDT/11:00 PM PDT]

## FREQUENCIES

0600-0630	BBC London	3955eu	6180eu	6190af	6195eu	15455na	15595na	16190na	17605na
		7230eu	9410eu	9600af	11760me				
		11940af	11955as	12095eu	15070va				
		15310as	15400af	15420af	15590va				
0600-0630	BBC London	17790as	17830as	17885af	21470af				
		5975na	7150pa	9640va	15280as				
		15360pa	21715as						
0600-0625	Cameroon Radio-TV	4850do							
0600-0700	CFCX Montreal	6005do							
0600-0700	CFRX Toronto	6070do							
0600-0700	CKZU Vancouver	6160do							
0600-0700	CSM World Svc, Boston	9455eu	9840eu	11705na	17555eu				
		17780va							
0600-0650	Deutsche Welle	11765af	13610af	13790af	15185af				
		15205af	17875af						
0600-0700 tent	ELBC Monrovia, Liberia	7275do							
0600-0700	HCJB Quito	9745na	15115na						
0600-0700	King of Hope, Lebanon	6280me							
0600-0700	KTBN Salt Lake City	7510na							
0600-0610 s	Malawi B'casting Corp.	3381do							
0600-0630	Nat'l Radio of Laos	7112as							
0600-0700 sa	R. E. Africa, E. Guinea	9585af							
0600-0700	R. For Peace Int'l	7375na	13630na	15030na	21566na				
0600-0700	Radio 1, Accra, Ghana	4915do							
0600-0700 f	Radio 2, Accra, Ghana	3366do							
0600-0700	Radio 2, Zambia	6165do	7235do						
0600-0700	Radio Australia	11880va	11930va	15160va	15240va				
		15320va	15365va	17630va	17750va				
		17795va	21525va	21740va	21775va				
0600-0645 s	Radio Douala, Cameroon	4795do							
0600-0700	Radio Havana Cuba	11760am							
0600-0700	Radio Korea	7275om	11810na	15170na					
0600-0630 s	Radio Latvia, Riga	5935eu							
0600-0700	Radio Moscow	11730va	11775va	11980va	13775va				
		15140va	15210va	15280va	15415va				
		15450va	15535va	15545va	15550va				
		15590va	17560va	17600va	17620va				
		17625va	17635va	17640va	17710va				
0600-0700	Radio Moscow	17730va	17850va	17860va	21630va				
		21645va	21690va	21725va	21740va				
		21785va	21790va	21845va					
0600-0700	Radio Moscow NAS West Cst	9635na	12050na	13605na					
		13645na	15180na	15410na	15425na				
0600-0700	Radio New Zealand Int'l	17770pa							
0600-0700	Radio Nigeria	3326do	4990do						
0600-0700	Radio Pyongyang	15180as	15230as						
0600-0700 sa	Radio Thailand	4830as	9655as	11905as					
0600-0630 s	Radio Zambia Int'l	9505af	11880af	17895af					
0600-0700 smtwha	RTM Malaysia	7295do							
0600-0700	SBC Radio 1, Singapore	5052do	11940do						
0600-0700	SLBS, Sierra Leone	3316do							
0600-0700	TWR Swaziland	5965af	7200af	11750af					
0600-0700	V. of the Mediterranean	9765eu							
0600-0620	Vatican Radio	6185eu	6248eu						
0600-0700	VOA Europe	3980eu	5995eu	6040eu	6060eu				
		6095eu	6140eu	7170eu	7325eu				
		11805eu							
0600-0700	Voice of America	6035af	6125af	9530af	9575af				
		15115af	17715af						
0600-0625	Voice of Kenya	4935do							
0600-0700	Voice of Malaysia	6175as	9750as	15295as					
0600-0700	WHRI Noblesville	7315eu	9495sa						
0600-0700 smtwhf	WMLK Bethel	9465eu							
0600-0700	WWCR Nashville	7520na							
0600-0700	WYFR Okeechobee	5985na	7355eu	13760na	15566eu				
0600-0630 s	ZLXA New Zealand	3935do							
0615-0630 s	Radio Bertoua, Cameroon		4750do						
0625-0700	Voice of Kenya	4935do							
0630-0700	BBC London	5975na	6180eu	6190af	6195eu				
		7230eu	9410eu	9600af	9640pa				
		11760me	11940af	11955as	12095eu				
		15070va	15310as	15400af	15420af				
		15590va	17830as	17885af	21470af				
0630-0700	BBC London	7150pa	15280as	15360pa	17790as				
		21715as							
0630-0700	BRT Brussels	6035eu	11695eu	13675eu					
0630-0700	Radio Finland	6120eu	9560eu	11755eu					
0630-0700	Radio Polonia	7270eu	9675eu						
0630-0700	Radio Tirana	7205eu	9500eu						
0630-0635 mtwhf	RTV Congolaise	7105do	9610do						
0630-0700	Swiss Radio Int'l	15430af	17570af	21770af					
0630-0700	Vatican Radio	11710af	17730af	21650af					
0630-0700 smtwhf	ZLXA New Zealand	3935do							
0635-0700	TWR Monte Carlo	9480eu							
0640-0700	TWR Monte Carlo	9480na							
0645-0700	Ghana B'casting Corp.	6130af							

## SELECTED PROGRAMS

## Sundays

- 0600 HCJB: Musical Mailbag. See S 0130.  
 0600 Radio For Peace Int'l: Ram's Horn Productions. See S 0000.  
 0630 BBC: Jazz For The Asking. Digby Fairweather plays listener requests.  
 0630 HCJB: Radio Reading Room. See S 0400.  
 0630 Radio Finland: Perspectives. Reports on current affairs developments.  
 0630 Radio For Peace Int'l: Living Enrichment Center. See S 0030.  
 0640 Radio Finland: Background. Program details not available at press time.

## Mondays

- 0600 HCJB: HCJB Today. See M 0200.  
 0600 Radio For Peace Int'l: Second Opinion. See M 0000.  
 0630 BBC: Feature. See S 1401.  
 0630 HCJB: Turning Point. Details not available at press time.  
 0630 Radio Finland: Business Monday. See S 2300.  
 0630 Radio For Peace Int'l: World Goodwill Forum. See M 0030.

- 0645 Radio Finland: Press Review. A roundup of current stories in the Finnish press.

## Tuesdays

- 0600 HCJB: Joni And Friends. See T 0200.  
 0600 Radio For Peace Int'l: FIRE. See T 0000.  
 0605 HCJB: Guidelines For Family Living. See M 1115.  
 0615 HCJB: Rendezvous. See M 1100.  
 0630 BBC: Rock/Pop Music. Malcolm Laycock looks back at "All-Time Swing" (3rd), followed by Tommy Vance's hard-rocking "Rock Salad" (through December 3rd).  
 0630 HCJB: Classical Favorites. Selections from the world of classical music.

## Wednesdays

- 0600 HCJB: Joni And Friends. See T 0200.  
 0600 Radio For Peace Int'l: FIRE. See T 0000.  
 0605 HCJB: Guidelines For Family Living. See M 1115.  
 0615 HCJB: Rendezvous. See M 1100.  
 0630 BBC: Meridian. Events in the world of the arts.  
 0630 HCJB: Sounds Of Joy. Contemporary Christian music.

## Thursdays

- 0600 HCJB: Joni And Friends. See T 0200.

- 0600 Radio For Peace Int'l: FIRE. See T 0000.  
 0605 HCJB: Guidelines For Family Living. See M 1115.  
 0615 HCJB: Rendezvous. See M 1100.  
 0630 BBC: Omnibus. See W 0030.  
 0630 HCJB: Music From The Mountains. Ken MacHarg presents music and inspiration.

## Fridays

- 0600 HCJB: Joni And Friends. See T 0200.  
 0600 Radio For Peace Int'l: FIRE. See T 0000.  
 0605 HCJB: Guidelines For Family Living. See M 1115.  
 0615 HCJB: Rendezvous. See M 1100.  
 0630 BBC: Meridian. See W 0630.  
 0630 HCJB: The Christian's Hour. Christian messages of inspiration.

## Saturdays

- 0600 HCJB: Joni And Friends. See T 0200.  
 0600 Radio For Peace Int'l: FIRE. See T 0000.  
 0605 HCJB: Guidelines For Family Living. See M 1115.  
 0615 HCJB: Rendezvous. See M 1100.  
 0630 BBC: Meridian. See W 0630.  
 0630 HCJB: Classical Favorites. See T 0630.



## 0700 UTC

## FREQUENCIES

[3:00 AM EDT/12:00 AM PDT]

0700-0730	BBC London	1780as	5975na	7150pa	9640va
		11955as	15280as	15360pa	21715as
0700-0730	BBC London	6180eu	6190af	6195eu	7230eu
		7325af	9410eu	9760eu	11760me
		11940af	12095eu	15070eu	15310as
		15400af	15420af	15590eu	17640va
		17790as	17885af	21470af	21660af
0700-0800	CFCX Montreal	6005do			
0700-0800	CFRX Toronto	6070do			
0700-0800	CKZU	6160do			
0700-0800	CSM World Svc, Boston	9455eu	9840eu	13760pa	17555as
		17780va			
0700-0800 tent	ELBC Monrovia, Liberia	7275do			
0700-0800	Ghana B'casting Corp.	6130af			
0700-0800	HCJB Quito	9610va	9745va	11840va	
0700-0800 mtwhf	Italian Radio Relay Svc	9815eu			
0700-0800	King of Hope, Lebanon	6280me			
0700-0800	KTBN Salt Lake City	7510na			
0700-0800	KVOH Los Angeles	9785na			
0700-0710 w	Malawi B'casting Corp.	3381do	5995do		
0700-0800 sa	R. E. Africa, Eq. Guinea	9585af			
0700-0800	R. for Peace Int'l	7375na	13630na	15030na	21465na
0700-0800	Radio 1, Accra, Ghana	4915do			
0700-0800 f	Radio 2, Accra, Ghana	3366do			
0700-0800	Radio 2, Zambia	6165do	7235do		
0700-0800	Radio Australia	11880va	11930va	15240va	15320va
		17630va	21525va	21740va	21775va
0700-0710	Radio Bafoussam, Cameroon	4000do			
0700-0800	Radio Havana Cuba	11835am			
0700-0800	Radio Japan	15325me	17765eu	17810as	17890as
		21525as			
0700-0800	Radio Moscow	17560va	17570va	17600va	17620va
		17625va	17635va	17710va	17730va
		17765va	17835va	17850va	17860va
		17890va	21475va	21515va	21625va
		21630va	21645va	21655va	
0700-0800	Radio Moscow	7315va	11730va	11775va	11980va
		11995va	12010va	13775va	15140va
		15205va	15280va	15320va	15340va
		15350va	15375va	15415va	15450va
		15535va	15540va	15545va	15550va
0700-0800	Radio Moscow	21690va	21725va	21740va	21785va

0700-0800	Radio Moscow NAS West Cst	21790va	21845va		
		9635na	12050na	13605na	
		13645na	15180na	15410na	15425na
		15595na	16190na	17605	
0700-0730	Radio New Zealand Int'l	17770pa			
0700-0800	Radio Nigeria	3326do	4990do		
0700-0800	Radio Pyongyang	15340as	17765as		
0700-0715	Radio Romania Int'l	11810au	11940au	15250au	15365au
		17720au	17805au	21665au	
0700-0800 sa	Radio Thailand	4830as	9655as	11905as	
0700-0800 smtwha	RTM Malaysia	7295do			
0700-0800	SBC Radio 1, Singapore	5052do	11940do		
0700-0800	SLBS, Sierra Leone	3316do			
0700-0800	TWR Monte Carlo	9480na			
0700-0800	TWR Monte Carlo	9480eu			
0700-0800	TWR Swaziland	7200af	11750af		
0700-0800	V. of Free China, Taiwan	5950na			
0700-0710 mtwhf	Vatican Radio	6185eu	6248eu	9645eu	11740eu
0700-0800	Voice of Kenya	4935do			
0700-0800	Voice of Malaysia	6175as	9750as	15295as	
0700-0800	WHRI Noblesville	7315eu	9495sa		
0700-0800	WWCR Nashville	7520am			
0700-0800	WYFR Okeechobee	7355na	13695na	13760eu	15566eu
0700-0800 smtwhf	ZXLA New Zealand	3935do			
0705-0800 a	Radio Douala, Cameroon	4795do			
0730-0800	AWR Foli, Italy	7230eu			
0730-0800	BBC London	6180eu	6190af	7325eu	9410eu
		9600af	9760eu	11760me	11860af
		11940af	12095va	15070eu	15105af
		15400af	15420af	15590af	17640va
		17830as	17885af	21470af	21660af
		7150pa	9640va	11955as	15280as
0730-0800	BBC London	15310as	15360pa	17790as	21715as
0730-0745 mtwhf	Icelandic National Radio	3295om	6100om	9265om	
0730-0800	R. New Zealand Int'l	9700pa			
0730-0800	Radio Austria	6155eu	13730eu	15410me	21490me
0730-0800	Radio Netherlands	9630au	9715au		
0730-0800	Radio New Zealand	9700as			
0730-0800	Radio Prague	17840pa	21705as		
0730-0800	Swiss Radio Int'l	3985eu	6165eu	9535eu	
0740-0800	Radio Prague Inter-Progra	6055eu	7345eu	9505eu	

## 0800 UTC

## FREQUENCIES

[4:00 AM EDT/1:00 AM PDT]

0800-0830	BBC London	See 0700 UTC			
0800-0830	BBC London	See 0730 UTC			
0800-0900	CFCX Montreal	6005do			
0800-0900	CFRX Toronto	6070do			
0800-0900	CSM World Svc, Boston	9455va	11705va	13760va	15610va
		17555va			
0800-0900	HCJB Quito	6205pa	9610pa	9745pa	11835pa
		11925pa			
0800-0900 mtwhf	Italian Radio Relay Svc	9815eu			
0800-0900	King of Hope, Lebanon	6280me			
0800-0900	KNLS Anchor Point	11715as			
0800-0900	KTWR Guam	15200as			
0800-0810 w	Malawi B'casting Corp.	3381do			
0800-0900 sa	R. E. Africa, Eq. Guinea	9585af			
0800-0900	R. for Peace Int'l	7375na	13630na	15030na	21465na
0800-0900	Radio 1, Accra, Ghana	4915do			
0800-0900 f	Radio 2, Accra, Ghana	3366do			
0800-0900	Radio 2, Zambia	6165do	7235do		
0800-0900	Radio Australia	9710va	15160va	15240va	15365va
		17630va	17750va	21775va	25750va
0800-0810	Radio Bafoussam, Cameroon	4000do			
0800-0900 a	Radio Douala, Cameroon	4795do			
0800-0900	Radio Finland	17800pa	21550pa		
0800-0900	Radio Korea	7550eu	13670eu		
0800-0900	Radio Moscow	7315va	11980va	12010va	12030va
		15140va	15155va	15205va	15280va
		15375va	15450va	15540va	15545va
		15550va	15580va	15590va	17550va
		17560va	17570va	17600va	17615va
0800-0900	Radio Moscow	See 0700 UTC			
0800-0900	Radio Moscow	21740va	21785va	21790va	21845va
0800-0900	Radio New Zealand Int'l	9700pa			
0800-0900	Radio Nigeria	3326do	4990do		

0800-0900	Radio Pyongyang	15180as	15230as		
0800-0830	Radio Tirana	9500as	11835as		
0800-0900 smtwha	RTM Malaysia	7295do			
0800-0900	SBC Radio 1, Singapore	5052do	11940do		
0800-0900	SLBS, Sierra Leone	3316do	5980do		
0800-0850	TWR Monte Carlo	9480eu			
0800-0825	TWR Swaziland	7200af	11750af		
0800-0830	V. of Islam, Bangladesh	15195as	17815as		
0800-0900	VOA Europe	11740eu	15160eu	15195eu	21570eu
		21615eu			
0800-0830	Voice of America	11735va	15160va	15195va	21570va
0800-0830	Voice of America	15195va	21570va	21700va	
0800-0900	Voice of Indonesia	11752as	11785as		
0800-0900	Voice of Kenya	4935do			
0800-0825	Voice of Malaysia	6175as	9750as	15295as	
0800-0900	Voice of Nigeria	7255af			
0800-0900	WHRI Noblesville	7315eu	9495sa		
0800-0900	WWCR Nashville	7520am			
0800-0900 smtwhf	ZXLA New Zealand	3935do			
0827-0900	KTWR Guam	11805as			
0830-0900	BBC London	6180eu	6190eu	7325eu	9410eu
		9660eu	9760eu	11860af	11940af
		11955as	12095eu	15070va	15280as
		15360pa	15400af	15420af	15590me
		17640va	17830as	21660af	21715as
0830-0900	BBC London	17885af			
0830-0900	Radio Netherlands	9630pa			
0830-0900	Swiss Radio Int'l	9560as	13685as	17670as	21695as
0830-0900	Voice of America	11735va	15160va	15195va	21570va
		21700va			
0835-0850 mtwhf	TWR Swaziland	7200af	11750af		
0840-0900	Radio Prague Inter-Progra	6055eu	7345eu	9505eu	
0840-0850 mtwhf	Voice of Greece	15650au	17525au		



15:00 AM EDT/2:00 AM PDT

0900-0930	BBC London	1170as	5975eu	6045eu	6180u					17755va	17760va	17765va	17775va
		6190af	6195as	7325eu	9410eu					17810va	17815va	17850va	17875va
		9660eu	9740as	9750eu	9760eu					17895va	17940va	17960va	21625va
		11760me	11860af	11940af	12095eu					21630va	21645va	21655va	21690va
		15070va	15400af	17640va	21660af	0900-1000	Radio Moscow			21715va	21725va	21740va	21785va
0900-0930	BBC London	15190sa	15280as	15310as	15360as					21790va	21800va	21845va	
		15420af	15575me	15590me	17705eu	0900-0925	Radio Netherlands			9630pa			
		17790af	17830as	17885af	21470af	0900-1000	Radio New Zealand			9700pa			
		21660af	21715as			0900-1000	Radio Nigeria			3326do	4990do		
0900-1000 s	BBS, Bhutan	6035do				0900-1000	Radio Tanzania			5985af	9685af	11765af	
0900-1000	CFCX Montreal	6005do				0900-0915	Radio Voice of Lebanon			6550me			
0900-1000	CFRX Toronto	6070do				0900-1000	RTM Malaysia			7295do			
0900-1000	CKZU Vancouver	6160do				0900-1000	SBC Radio 1, Singapore			5052do	11940do		
0900-1000	CSM World Svc, Boston	9455va	11705va	13760va	15610va	0900-1000	SLBS, Sierra Leone			3316do			
		17555va				0900-0935 s	TWR Monte Carlo			9480eu			
0900-0950	Deutsche Welle	6160as	11915as	17780as	17820as	0900-1000	VOA Europe			11740eu	15160eu	15195eu	21570eu
		21465as	21650as	21680as						21615eu			
0900-0950	Deutsche Welle	9565af	15410af	21600af		0900-1000	Voice of Kenya			4935do			
0900-1000	FEBC Manila	9800as	11665as			0900-1000	Voice of Nigeria			7255af			
0900-1000	HCJB Quito	9745va				0900-1000	WWCR Nashville			7520am			
0900-1000 mtwhf	Italian Radio Relay Svc	9815eu				0900-0930 mtwhf	ZLXA New Zealand			3935do			
0900-1000	King of Hope, Lebanon	6280me				0905-1000	Cameroon Radio-TV			4850do			
0900-0927	KTWR Guam	15200as				0905-1000 mtwhf	R. 2 Schools Prg., Ghana			7295do			
0900-1000	KTWR Guam	11805as				0905-1000 sa	Radio 1, Accra, Ghana			4915do			
0900-0910	Malawi B'casting Corp.	5995do				0905-1000 sa	Radio 2, Accra, Ghana			3366do			
0900-1000 sa	R. E.Africa, Eq. Guinea	9585af				0910-0935 as	TWR Monte Carlo			11655na			
0900-0930	R. for Peace Int'l	7375na	13630na	15030na	21465na	0910-0940 smwha	Ulaanbaatar R., Mongolia			11850pa	12015pa		
0900-0905	Radio 1, Accra, Ghana	4915do				0915-0939	Al-Quds Radio (cland.)			5900om	5990om		
0900-0905 f	Radio 2, Accra, Ghana	3366do				0920-1000	BFBS British Forces			15245me	17830me	21745me	
0900-1000	Radio 2, Zambia	6165do	7235do			0930-1000	BBC London			5975eu	6045eu	6180eu	6190af
0900-1000	Radio Australia	9580va	9710va	9760va	15160va					6195as	9410eu	9660eu	9740as
		15240va	15320va	15365va	25750va					9750eu	9760eu	11750as	11760me
0900-1000	Radio Beijing	11755au	15440au	17710au						11940af	12095eu	15070va	15310as
0900-1000	Radio Japan	15270pa	17890pa							15400af	15420af	15575me	15590me
0900-1000	Radio Moscow	7315va	11850va	12010va	12030va	0930-1000	BBC London			15190sa	17640va	17705eu	
		15140va	15155va	15205va	15320va	0930-1000	Radio Afghanistan			4940as	9635as	17655as	21600as
		15375va	15405va	15415va	15450va	0930-1000	Radio Netherlands			11895pa			
		15500va	15580va	15590va	17550va	0930-0940	RTV Togo			7265do			
		17560va	17570va	17600va	17615va	0940-1000	Radio Prague Inter-Progra				6055eu	7345eu	9505eu
		17625va	17635va	17680va	17690va								

**[6:00 AM EDT/3:00 AM PDT]**

1000-1100	All India Radio, Delhi	15050as	15335as	17387as	17865as	1000-1100	Radio Moscow	See 0900 UTC		
		21735as				1000-1025	Radio Netherland	11895pa		
1000-1030	BBC London	See 0900 UTC				1000-1100	Radio New Zealand	9700pa		
1000-1030	BBC London	17640eu	17705eu	17790af	17885af	1000-1100	Radio Nigeria	4990do	7285do	
		21470af	21660af	21715as		1000-1100	Radio RSA, Johannesburg		17835af	
1000-1025 mtwhf	BRT, Brussels	6035eu	13675eu	21810af		1000-1030	Radio Tanzania	5985af	9685af	11765af
1000-1100	Cameroon Radio-TV	4850do				1000-1100 mtwh	RTM Malaysia	7295do		
1000-1100	CFCX Montreal	6005do				1000-1100	SBC Radio 1, Singapore	5010do	5052do	11940do
1000-1100	CFRX Toronto	6070do				1000-1100	SLBS, Sierra Leone	3316do		
1000-1100	CKZU Vancouver	6160do				1000-1100	TWR Costa Rica	9725ca		
1000-1100	FEBC Mainila	9800as	11665as			1000-1100	Voice of America	5985as	11720as	11740va 15160va
1000-1100	HCJB Quito	9745pa	11925pa					15195va	15425as	21570va 21615va
1000-1100 mtwhf	Italian Radio Relay Svc	9815eu				1000-1100	Voice of America	9590ca	11915ca	15120ca
1000-1100	KSDA Guam	13720as				1000-1100	Voice of Kenya	4935do		
1000-1100 mtwhf	R. 2 Schools Prg., Ghana	7295do				1000-1100	Voice of Nigeria	7255af		
1000-1100 sa	R. E.Africa, Eq. Guinea	9585af				1000-1030	Voice of Vietnam	9755as	12020as	
1000-1100 sa	Radio 1, Accra, Ghana	4915do				1000-1100	WWCR Nashville	7520na		
1000-1100 sa	Radio 2, Accra, Ghana	3366do				1000-1100	WYFR Okeechobee	1000	985am	7510am
1000-1100	Radio 2, Zambia	6165do	7235do			1000-1100	Zimbabwe BC Corp.	3396do	7283do	
1000-1030	Radio Afghanistan	4940as	9635as	17655as	21600as	1030-1100	AWR Foli, Italy	7230eu		
1000-1100	Radio Australia	7140va	9580va	11800va	13605va	1030-1100	BBC London	See 0900 UTC		
		15160va	15170va	15365va	25750va			17640va	17705eu	17790af 17885af
1000-1100	Radio Beijing	11755au	15440au	17710au		1030-1040 mtwhf	Malawi B'casting Corp.	21470af	21660af	
1000-1100	Radio Moscow	11840na	11850va	12010va	12030va			5995do		
		15140va	15155va	15320va	15375va	1030-1100	Radio Austria	15450as	21490as	
		15405va	15415va	15450va	15500va	1030-1100	Radio Korea	11715na		
		15535va	15540va	15550va	15560va	1030-1100 sa	Radio Tanzania	5985af	9685af	11765af
		15580va	15590va	17560va	17600va	1030-1100	Radio Zambia Int'l	9505af	11880af	17895af
1000-1100	Radio Moscow	17615va	17625va	17635va	17655va	1030-1100	Sri Lanka B'casting Corp.	11835as	15120as	17850as
		17680va	17690va	17755va	17760va	1030-1100	UAE Radio, Dubai	13675eu	15320eu	15435as 21605as
		17765va	17775va	17810va	17815va	1030-1100	VOIRI, Teheran, Iran	9575va	9705va	11715va 11790va
		17850va	17890va	21630va	21645va			11940va		
		21655va	21690va	21715va	21725va	1040-1100	Radio Prague Inter-Progra		6055eu	7345eu 9505eu
						1040-1050 mtwhfa	Voice of Greece	15650as	17535as	



# GET THE LATEST ADVANCES IN ELECTRONICS

WITH A SUBSCRIPTION TO

# Radio- Electronics®



ENJOY THE WORLD OF ELECTRONICS EACH MONTH!

Now you can subscribe to the best electronics magazine. The only one that brings you articles on—electronics projects, technology, circuit design, communications, new products and much more.

Radio-Electronics looks to the future and shows you what new video, audio and computer products are on the horizon. What's more you'll find helpful, monthly departments such as Video News, Equipment Reports, Hardware Hacker, Audio Update, Drawing Board, Communications Corner. All designed to give you instruction, tips, and fun.

Radio-Electronics gives you exciting articles like:

- ☐ ISDN: The Telephone Network of Tomorrow
- ☐ The Facts on FAX
- ☐ A Digital Phone Lock
- ☐ How To Design Switching Circuits

**PLUS: COMPUTER DIGEST!** A New Kind of Magazine for Electronics Professionals.

- ☐ EIA-232 A real standard for serial interfacing?
- ☐ Build a synergy card for your PC
- ☐ '386 Power at a '286 price
- ☐ Build a biofeedback monitor
- ☐ More on Multiplexing



FOR FASTER SERVICE CALL TODAY  
**1-800-999-7139**

# DON'T DELAY SUBSCRIBE TODAY!



1100 UTC

[7:00 AM EDT/4:00 AM PDT]

## FREQUENCIES

1100-1200	AWR Costa Rica	9725ca				17890va	21630va	21645va	21655va
1100-1130	BBC London	5965na	6045eu	6180eu	6190af	21690va	21715va	21740va	21785va
		6195eu	9410eu	9515na	9660eu	21790va	21800va	21845va	
		9740as	9750af	9760eu	11750as				
		11760me	11940af	12095eu	15070va				
		15310as	15400af	15420af	15575me				
1100-1130	BBC London	15220na	17640va	17705eu	17790af				
		17885af	21470af	21660af					
1100-1200	CFCX Montreal	6005do							
1100-1200	CFRX Toronto	6070do							
1100-1200	CSM World Svc, Boston	9455eu	9495eu	9820pa	13625pa				
		15610pa	17555pa						
1100-1150	Deutsche Welle	11890af	15410af	17765af	17800af				
		17860af	21600af						
1100-1200 mtwhf	Italian Radio Relay Svc	9815eu							
1100-1200	KTBN Salt Lake City	7510na							
1100-1110 sa	Malawi B'casting Corp.	5995do							
1100-1110 mtwhf	R. 2 Schools Prg., Ghana	7295do							
1100-1200	Radio 1, Accra, Ghana	4915do							
1100-1200 sa	Radio 2, Accra, Ghana	3366do							
1100-1200	Radio Australia	6080va	7240va	9580va	9710va				
		11800va	11930va	15170va	15365va				
		21720va							
1100-1200	Radio Beijing	15135eu							
1100-1200	Radio Japan	6120na	11815sa	11840na	12070pa				
1100-1200	Radio Jordan	13655na							
1100-1200	Radio Moscow	11840na	11850va	15140va	15155va				
		15320va	15375va	15405va	15450va				
		15480va	15500va	15535va	15540va				
		15550va	15560va	15590va	17560va				
		17570va	17600va	17615va	17680va				
1100-1200	Radio Moscow	17755va	17760va	17765va	17775va				
		17805va	17810va	17815va	17830va				
1100-1130	Radio Mozambique	9525af	11818af	11835af					
1100-1120	Radio Pakistan	17565eu	21520eu						
1100-1200	Radio RSA, Johannesburg	9555af	11860af	11900af					
1100-1130	Sri Lanka B'casting Corp.	11835as	15120as	17850as					
1100-1130	Swiss Radio Int'l	13635as	15570as	17830as	21770as				
1100-1200	TWR Bonaire	11815am	15345am						
1100-1130	Voice of Vietnam	7416as	9732as						
1100-1125	VOIRI, Teheran, Iran	9575va	9705va	11715va	11790va				
		11940va							
1100-1200	WYFR Okeechobee	5950na	7355na	11900ca					
1115-1145	Radio Nepal, Katmandu	5005as	7165as						
1120-1140	Hunan PBS Changs ha China								
1125-1130 sa	Radio Botswana, Gaborone	5955af	7255af						
1130-1200	BBC London	5965na	6045eu	6180eu	6190af				
		6195eu	9410eu	9515na	9660eu				
		9740as	9750eu	9760eu	11750as				
		11760me	11940af	12095eu	15070va				
		15220na	15310as	15420af	15575me				
1130-1200	BBC London	17640va	17705eu	17790af	17885af				
		21470af							
1130-1200	Radio Austria Int'l	6155eu	13730eu	15430as	21490na				
1130-1200 mtwhf	Radio Finland, Helsinki	15400na	21550na						
1130-1140	Radio Lesotho, Maseru	4800do							
1130-1200	Radio Netherlands	5955eu	9715eu	17575eu	21480eu				
		21520eu							
1130-1200	Radio Sweden	11960as	17740as	21570pa					
1130-1200	Radio Thailand, Bangkok	4830as	9655as	11905as					
1130-1200	Radio Tirana, Albania	9480as	11835as						
1130-1145	RTM Malaysia	5950do	7160do						
1130-1145	Vatican Radio	6248eu	9645eu	11740eu	15210eu				
1130-1200	Voice of America	11735me	15160me	15225me	21550me				
		21705me							
1145-1200	Radiodiffusion du Burundi		6140af						

## SELECTED PROGRAMS

## Sundays

- 1100 HCJB: Communication. Details not available at press time.
- 1115 HCJB: Sounds Of The Times. Details not available at press time.
- 1130 BBC: The Ken Bruce Show. See S 0030.
- 1130 HCJB: Morning Song. Music and thoughts to start the day.
- 1130 Radio For Peace Int'l: The World In Review. See S 0530.
- 1150 Radio For Peace Int'l: Undercurrents. See S 0550.

## Mondays

- 1100 HCJB: Rendezvous. Dick Saunders presents Bible study and evangelism.
- 1100 Radio For Peace Int'l: Food For The Thoughtful. See S 2300.
- 1105 Radio Finland: Press Review. See M 0645.
- 1115 HCJB: Guidelines For Family Living. Help for the family from Harold Sala.
- 1130 BBC: Composer Of The Month. See M 0230.
- 1130 HCJB: Insight For Living. Charles Swindoll applies the Bible to life today.
- 1130 Radio For Peace Int'l: United Nations. See S 2330.
- 1150 Radio For Peace Int'l: Undercurrents. See S 0550.

## Tuesdays

- 1100 HCJB: Rendezvous. See M 1100.
- 1100 Radio For Peace Int'l: Peace Talks. See M 2300.
- 1115 HCJB: Guidelines For Family Living. See M 1115.
- 1130 BBC: Megamix. Music, sports, fashion, health, travel, news, and opinion for young people.
- 1130 HCJB: Insight For Living. See M 1130.

- 1130 Radio For Peace Int'l: United Nations. See S 2330.
- 1140 Radio Finland: Press Review. See M 1140.
- 1145 Radio Finland: Airmail. See M 2315.

## Wednesdays

- 1100 HCJB: Rendezvous. See M 1100.
- 1100 Radio For Peace Int'l: UNESCO. See T 0130.
- 1115 HCJB: Guidelines For Family Living. See M 1115.
- 1130 BBC: Meridian. See W 0630.
- 1130 HCJB: Insight For Living. See M 1130.
- 1130 Radio For Peace Int'l: Headlines You May Have Missed or United Nations. See T 2330.
- 1140 Radio Finland: Press Review. See M 1140.



Thomas Bien, chief of VOA's Hungarian service.

- 1145 Radio Finland: Sports Fare. See T 2315.

## Thursdays

- 1100 HCJB: Rendezvous. See M 1100.
- 1100 Radio For Peace Int'l: World Peace And Responsibility. See M 0130.
- 1115 HCJB: Guidelines For Family Living. See M 1115.
- 1130 BBC: Drama. Ray Bradbury's "The Golden Apples Of The Sun" features eight sci-fi short stories (through 26th).
- 1130 HCJB: Insight For Living. See M 1130.
- 1130 Radio For Peace Int'l: United Nations. See S 2330.
- 1140 Radio Finland: Press Review. See M 1140.
- 1145 Radio Finland: The Fourth Generation. See S 1335.

## Fridays

- 1100 HCJB: Rendezvous. See M 1100.
- 1100 Radio For Peace Int'l: Amnesty International Reports or The Other Americas Radio. See S 0230.
- 1115 HCJB: Guidelines For Family Living. See M 1115.
- 1130 BBC: Meridian. See W 0630.
- 1130 HCJB: Insight For Living. See M 1130.
- 1130 Radio For Peace Int'l: The Neumaier Report or United Nations. See H 2330.
- 1140 Radio Finland: Press Review. See M 1140.
- 1145 Radio Finland: Names In The News. See H 2315.

## Saturdays

- 1100 HCJB: Family Foundations. Interviews and discussions about issues affecting today's family.
- 1100 Radio For Peace Int'l: Voices Of Our World. See F 2300.
- 1130 BBC: Meridian. See W 0630.
- 1130 HCJB: Sounds Of Joy. See W 0630.
- 1130 Radio For Peace Int'l: United Nations. See S 2330.



1200 UTC

**[8:00 AM EDT/5:00 AM PDT]**

## FREQUENCIES

1200-1300	ABC Perth	9610na			
1200-1230	BBC London	6045eu	6180eu	6190af	6195eu
		9410eu	9515na	9660eu	9740na
		9750eu	9760eu	11750as	11760me
		11940af	12095eu	15070eu	15220na
		15310as	15420af	15575me	17640va
1200-1230	BBC London	17705eu	17790af	17885af	21470af
		21660af			
1200-1300	CFCX Montreal	6005do			
1200-1300	CFRX Toronto	6070do			
1200-1300	CKZU Vancouver	6160do			
1200-1300	CSM World Svc, Boston	9475am	9495am	13625am	13760am
		15610pa			
1200-1300	HCJB Quito	11740am	15115am	17890am	
1200-1300 mtwhf	Italian Radio Relay Svc	9815eu			
1200-1300	KTBN Salt Lake City	7510am			
1200-1210 w	Malawi B'casting Corp.	3381do	5995do		
1200-1300 sa	R. E. Africa, Eq. Guinea	9585af			
1200-1300	Radio 1, Accra, Ghana	4915do			
1200-1225 sa	Radio 2, Accra, Ghana	3366do			
1200-1300	Radio Australia	5995va	6080va	7240va	9580va
		9710va	11800va	11930va	21720va
1200-1300	Radio Beijing	8425as	11660as		
1200-1300	Radio Beijing	15110am	17715am		
1200-1300 mtwhf	Radio Canada Int'l	9635am	11855am	17820am	
1200-1300	Radio Canada Int'l	9635am	11855am	17820am	
1200-1300 mtwhf	Radio Douala, Cameroon	4795do			
1200-1230	Radio Federal Yugoslavia		17725eu	17740na	21600as
1200-1300	Radio Jordan	13655me			
1200-1300	Radio Korea	9750na			
1200-1230	Radio Mogadishu, Somalia		6095af		
1200-1300	Radio Moscow	11840na	11850va	11940va	12025va
		15110va	15140va	15155va	15205va
		15375va	15480va	15500va	15540va
		15550va	15560va	15595va	17570va
		17615va	17665va	17760va	17765va
1200-1300	Radio Moscow	17805va	17810va	17815va	17830va
		21630va	21645va	21655va	21690va
		21715va	21740va	21785va	21790va
		21800va	21845va		
1200-1225	Radio Netherlands	5955eu	9715eu	17575eu	21480eu
		21520eu			
1200-1210	Radio New Zealand	9700pa			

1200-1300	Radio Nigeria	4990do	7285do				
1200-1230 as	Radio Norway	17820me	21695as				
1200-1225	Radio Polonia, Warsaw	6095eu	11815eu				
1200-1230	Radio Romania Int'l	15365as	15380as	17720as			
1200-1300 sa	Radio Tanzania	5985af	9684af	11765af			
1200-1230	Radio Tashkent	9540as	9600as	15420as			
1200-1230	Radio Thailand	4830as	9655as	11905as			
1200-1230 s	Radio Zambia Int'l	9505af	11880af	17895af			
1200-1300	RTM Malaysia	7295do					
1200-1300	SBC Radio 1, Singapore	5010do	5052do	11940do			
1200-1300	SLBS, Sierra Leone	3316do	5980do				
1200-1300	TWR Bonaire	11815am	15345am				
1200-1230 smwha	Ulaanbaatar R., Mongolia	11850as	12015as				
1200-1215	V. of Cambodia	9695as	11938as				
1200-1230 mtwhf	Vatican Radio	17865as	21515as				
1200-1230	Voice of America	6110as	9760as	11715as	15155as		
		15425as					
1200-1300	Voice of Kenya	4935do					
1200-1300	Voice of Nigeria	7255af					
1200-1300	WWCR Nashville	15690na					
1200-1300	WYFR Okeechobee	5950am	6015am	11580am	17750am		
1215-1230	Radio Bayrak, Cyprus	6150va					
1215-1300	Radio Cairo	17595as					
1215-1300	Radio Korea	9750am					
1226-1300	Radio 2, Accra, Ghana	7295do					
1230-1300	BBC London	6045eu	6180eu	6190af	6195ca		
		9410eu	9515na	9660eu	9740na		
		9750eu	9760eu	11760me	11940af		
		12095eu	12170as	15070eu	15220na		
		15310as	15420af	15575me	17640va		
1230-1300	BBC London	17705eu	17790af	17885af	21470af		
		21660af					
1230-1255 S	BRT, Brussels	21810na					
1230-1300	Radio Bangladesh	15200as	15605as	15647as	17750as		
1230-1255 mtwhf	Radio Finland	15400am	21550am				
1230-1300	Radio France Int'l	9805eu	11670eu	15155eu	15195eu		
		21635na	21645na				
1230-1300	Radio Sweden	11715as	17740as	21570as			
1230-1300	Sri Lanka B'casting Corp.	6075as	9720as				
1230-1300	Voice of America	6110as	9760as	11715as	15155as		
		15425as					
1230-1300	Voice of Turkey	9675eu	17785as				
1230-1300	Voice of Vietnam	9840as	12020as	15010as			
1235-1245	Voice of Greece	15550am	15650am	17525am			
1240-1300	Radio Prague Inter-Progra	6055eu	7345eu	9505eu			

## SELECTED PROGRAMS

### Sundays

1200 HCJB: Kids' Corner. Mr. Lizard and friends  
present a program for children.  
1201 BBC: Play Of The Week. See S 0101.  
1230 HCJB: Your Story Hour. Stories about character  
for children.

### **Mondays**

1200 HCJB: Sound Words. Gil Rugh presents religious advice.

1200 Radio Finland: Business Monday. See S 2300.

1215 BBC: Quiz. This month, hear the literary quiz "Slightly Foxed" (through 16th).

1215 HCJB: The Sower. See M 0130.

1215 Radio Finland: Press Review. See M 0645.

1230 HCJB: Focus On The Family. A daily look at marriage, parenting, and social trends that affect the family.

1245 BBC: Sports Roundup. News from the world of sports.

## Tuesdays

1200 HCJB: Sound Words. See M 1200.  
1215 BBC: Multitrack 1: Top 20. See M 2330.  
1215 HCJB: A Visit With Mrs. G. Bible stories for children.  
1230 HCJB: Focus On The Family. See M 1230.  
1245 BBC: Sports Roundup. See M 1245.  
1245 Radio Finland: Press Review. See M 1140.  
1250 Radio Finland: Airmail. See M 2315.

### Wednesdays

1200 HCJB: Sound Words. See M 1200.  
1215 BBC: New Ideas. See M 1615.  
1215 HCJB: Get Set. See M 0415.  
1230 HCJB: Focus On The Family. See M 1230.  
1235 BBC: Talks. See M 1635.  
1245 BBC: Sports Roundup. See M 1245.  
1245 Radio Finland: Press Review. See M 1140.  
1250 Radio Finland: Sports Fare. See T 2315.

### Thursdays

1200 HCJB: Sound Words. See M 1200.  
1215 BBC: Multitrack 2. See W 2330.

1215 HCJB: Critter County. Christian Wyrzten and her  
friendly critters present a children's program.  
1230 HCJB: Focus On The Family. See M 1230.  
1245 BBC: Sports Roundup. See M 1245.  
1245 Radio Finland: Press Review. See M 1140.  
1250 Radio Finland: The Fourth Generation.  
See S 1335.

## Fridays

1200 HCJB: Sound Words. See M 1200.  
1215 BBC: Feature. This month's fare is a tour of "The Great Cathedrals Of Britain" (through 27th).  
1215 HCJB: Youth Time Radio. See M 0145.  
1230 HCJB: Focus On The Family. See M 1230.  
1245 BBC: Sports Roundup. See M 1245.  
1245 Radio Finland: Press Review. See M 1140.  
1250 Radio Finland: Names In The News. See H 2315.

### Saturdays

1200 HCJB: We Kids. A fast-moving program for children.

1215 BBC: Multitrack 3. See F 2330.

1230 HCJB: A Visit With Mrs. G. See T 1215.

1245 BBC: Sports Roundup. See M 1245.

1245 HCJB: Critter County. See H 1215.



1300 UTC

**[9:00 AM EDT/6:00 AM PDT]**

## FREQUENCIES

1300-1400	ABC Perth	9610			
1300-1330	BBC London	5975eu	6045eu	6180eu	6190af
		6195ca	9410eu	9515na	9660eu
		9740as	9750eu	9760eu	11750as
		11760me	11820as	11940af	12095eu
		15070va	15310as	15420af	15575me
1300-1330	BBC London	7180as	15220na	17640va	17705eu
		17790af	17885af	21470af	21660af
1300-1325	BRT Belgium	21810na			
1300-1400	CFCX Montreal	6005do			
1300-1400	CFRX Toronto	6070do			
1300-1400	CKZU Vancouver	6160do			
1300-1400	CSM World Svc, Boston	9475pa	9495pa	13625pa	13760pa
		15610pa			
1300-1400	FEBC Manila	11685pa			
1300-1400	FEBC Manila	11850as			
1300-1400	HCJB Quito	11740	15115	17890	
1300-1400 mtwhf	Italian Radio Relay Svc	9815eu			
1300-1400	KTBN Salt Lake City	7510			
1300-1400 sa	R. E. Africa, Eq. Guinea	9585af			
1300-1400	Radio 1, Accra, Ghana	4915do			
1300-1400	Radio 2, Accra, Ghana	7295do			
1300-1400	Radio Australia	5995va	6080va	7240va	9580va
		9710va	9770va	11720va	21720va
1300-1330	Radio Beijing	11600as	11660as		
1300-1400	Radio Beijing	11855as			
1300-1330	Radio Cairo	17595as			
1300-1400 s	Radio Canada Int'l	11955am	17820am		
1300-1330 mtwhf	Radio Douala, Cameroon		4795do		
1300-1330	Radio Federal Yugoslavia		21715am		
1300-1330 as	Radio Finland	15400na	1550na		
1300-1315	Radio Jordan	13655na			
1300-1400	Radio Jordan	13655na			
1300-1315	Radio Korea	9750na			
1300-1400	Radio Moscow	7175va	7315va	7370va	9785va
		9885va	11685va	11840na	11960va
		12025va	12030va	12070va	15110va
		15155va	15205va	15375va	15405va
		15480va	15500va	15540va	15550va
1300-1400	Radio Moscow	15560va	15590va	15595va	17560va
		17570va	17630va	17635va	17655va
		17760va	17805va	17810va	1815va
		17830va	17890va	17940va	21630va

		21645va	21690va	21715va	21740va
1300-1400	Radio Moscow	21785va	21790va	21845va	
1300-1400	Radio Nigeria	4990do	7285do		
1300-1330 as	Radio Norway	9590eu	11860eu		
1300-1400	Radio Pyongyang	9325eu	9345eu	9640as	13650as
		15230as			
1300-1400	Radio Romania Int'l	11940eu	15365eu	17720eu	21665eu
1300-1330	Radio Sweden	11960as	17740as	21570as	
1300-1400 sa	Radio Tanzania	5985af	9684af	11765af	
1300-1400	RTM Malaysia	7295do			
1300-1400	SBC Radio 1, Singapore	5010do	5052do	11940do	
1300-1400	SLBS, Sierra Leone	3316do	5980do		
1300-1400	Sri Lanka B'casting Corp.	6075as	9720as		
1300-1330	Swiss Radio Int'l	6165eu	9535eu	12030eu	
1300-1330	TWR Boniare	11815am	15345am		
1300-1330	Voice of America	6110as	9760as	11715as	15155as
		15245as			
1300-1325	Voice of Kenya	4935do			
1300-1400	Voice of Nigeria	7255af			
1300-1400	WHRI Noblesville	9465	11790		
1300-1400	WWCR Nashville	15690			
1300-1400	WYFR Okeechobee	6015am	11580am	13695eu	17750af
1315-1330	Radio Voice of Lebanon	5me	6549.5		
1325-1400 mtwhf	Voice of Kenya	4935do			
1330-1400	All India Radio, Delhi	9565as	11760as	15335as	
1330-1400	BBC London	5975eu	6045eu	6180eu	6190af
		6195ca	9410eu	9515na	9660eu
		9740as	9750eu	9760eu	11750as
		11820as	11940af	12095eu	15070va
		15220na	15310as	15420af	15575me
1330-1400	BBC London	7180as	17640va	17705eu	17790af
		17885af	21470af	21660af	
1330-1400	Nat'l Radio of Laos	7112as			
1330-1400	Radio Austria Int'l	15430as			
1330-1400	Radio Canada Int'l	6095as	9535as	9700as	11795as
1330-1400	Radio Douala, Cameroon	4795do			
1330-1400	Radio Finland	15400na	21550na		
1330-1400 a	Radio Republik Indonesia	3385do	6070do		
1330-1400	Radio Tashkent	7325as	9540as	9600as	11860as
		15470as			
1330-1400	Swiss Radio Int'l	7480as	11695as	13635as	15570as
		17830as	21695as		
1330-1400	UAE Radio, Dubai	13675eu	15320eu	15435as	21605as
1330-1400	Voice of America	6110as	9760as	15155as	15425as
1330-1400	Voice of Vietnam	9840as	12020as	15010as	

## SELECTED PROGRAMS

### Sundays

- 1300 HCJB: Adventure Club. A weekly adventure program on Christianity for children.
- 1300 Radio Finland: Compass North. A review of the week's news.
- 1310 Radio Finland: Perspectives. See S 0630.
- 1315 HCJB: The Word Today. A discussion of Biblical themes.
- 1315 Radio Finland: Starting Finnish. Finnish language lessons for English speakers.
- 1330 HCJB: Telling The Truth. Stuart Briscoe presents a religious program.
- 1335 Radio Finland: The Fourth Generation. Conversations with Finnish-Americans.

### Mondays

- 1300 HCJB: Stories Of Great Christians. Dramatized stories about Christian leaders past and present.  
1300 Radio Finland: Business Monday. See S 2300.  
1315 HCJB: Our Daily Bread. Devotions from the Bible.

- 1315 Radio Finland: Press Review. See M 0645.  
1320 Radio Finland: Highlights. See S 2310.  
1330 HCJB: Verses To Remember. Details not  
available at press time.  
1345 HCJB: Guidelines For Family Living. See M 1115.

## Tuesdays

- 1300 HCJB: Stories Of Great Christians. See M 1300.  
1315 HCJB: Our Daily Bread. See M 1315.  
1330 HCJB: Verses To Remember. See M 1330.  
1345 HCJB: Guidelines For Family Living. See M 1115.

### Wednesdays

- 1300 HCJB: Stories Of Great Christians. See M 1300.  
1315 HCJB: Our Daily Bread. See M 1315.  
1330 HCJB: Verses To Remember. See M 1330.  
1345 HCJB: Guidelines For Family Living. See M 1115.

### Thursdays

- 1300 HCJB: Stories Of Great Christians. See M 1300.

- 1315 HCJB: Our Daily Bread. See M 1315.  
1330 HCJB: Verses To Remember. See M 1330.  
1345 HCJB: Guidelines For Family Living. See M 1115.

## Fridays

- 1300 HCJB: Stories Of Great Christians. See M 1300.  
1315 HCJB: Our Daily Bread. See M 1315.  
1330 HCJB: Verses To Remember. See M 1330.  
1345 HCJB: Guidelines for Family Living. See M 1115.

### Saturdays

- 1300 HCJB: Adventures In Odyssey. Lively children's dramas from the "Focus on the Family" team.
- 1315 Radio Finland: Finnish History. See F 2315.
- 1330 HCJB: Children's Bible Hour. Songs and stories for children.
- 1330 Radio Finland: Names In The News. See H 2315.
- 1335 Radio Finland: Sports Fare. See T 2315.
- 1340 Radio Finland: Background. See S 0640.



1400 UTC

[10:00 AM EDT/7:00 AM PDT]

## FREQUENCIES

1400-1500	All India Radio, Delhi	9565as	11760as	15335as				21645va	21690va	21740va	21785va
1400-1430	BBC London	5975eu	6045eu	6180eu	6190af			21790va	21845va		
		6195as	9410eu	9660eu	9740as			4990do	7285do		
		9750eu	9760eu	11750as	11820as			5985af	9684af	11765af	
		11940af	12095eu	15070eu	15310as			9500as	11985as		
		15575me	17640va	17705eu	17790af			7295do			
1400-1430	BBC London	7180as	17880af	21470af	21660af			5010do	5052do	11940do	
1400-1425 mtwhf	BRT, Brussels	21810na						3316do	5980do		
1400-1500	Cameroon Radio-TV	4850na						6075as	9720as		
1400-1500	CFCX Montreal	6005do						6165eu	9535eu	12030eu	
1400-1500	CFRX Toronto	6070do						6140			
1400-1500	CSM World Svc, Boston	9530pa	13625pa	13760pa	15610pa			6110as	7125as	9645as	9760as
		21670pa						15160as	15205as	15395as	15425
1400-1500	FEBC Manila	11850as						4935do			
1400-1500	FEBC Manila	11685pa						7255af			
1400-1500	HCJB Quito	15115na	17890na	25950na				9465na	11790ww		
1400-1500	King of Hope, Lebanon	6280me						15420na			
1400-1500	KTN Salt Lake City	7510ww						15690am			
1400-1410	Malawi B'casting Corp.	3381do						6015na	11580sa	17750af	
1400-1500	Radio 1, Accra, Ghana	4915do						6120eu	11755eu	11820eu	15185eu
1400-1500	Radio 2, Accra, Ghana	7295do						21550eu			
1400-1500	Radio Australia	5995va	6080va	7240va	9580va			5023do			
		9710va	11720va	17630va				9560??			
1400-1500	Radio Beijing	4200as	11815as	15135as	15165as			5975eu	6045eu	6180eu	6190af
1400-1500	Radio Beijing	7405am						6195as	9410eu	9740as	9750eu
1400-1430	Radio Canada Int'l	11935eu	15305eu	15315eu	15325eu			9760eu	11750as	11820as	11940af
		17795eu	17820eu	21545eu				12095eu	15070va	15310as	15575me
1400-1500 s	Radio Canada Int'l	11955	17820					17640va	17705eu	17790af	17880af
1400-1430	Radio Douala, Cameroon	4795do						7180as	21470af	21660af	
1400-1500	Radio France Int'l	11910as	17650as	21770as				3260do	7275do		
1400-1500	Radio Japan	9535am	11815as	11865as				6155eu	11780as	13730eu	21490va
1400-1410	Radio Juba, Sudan	9540do	9550do					4795do			
1400-1500	Radio Korea	9570as						5955eu	13770eu	15150eu	17575eu
1400-1500	Radio Moscow	7370va	9785va	11765va	11840na			17605eu	21480eu		
		11850va	11870va	11905va	12025va			6135eu	9540eu	11815eu	
		12030va	12050va	15140va	15180va			5990do			
		15205va	15375va	15560va	17570va			3970do	7105do		
		17635va	17655va	17670va	17810va			9540om			
1400-1500	Radio Moscow	17815va	17890va	21505va	21630va			9575as	13780as		
								6248eu	9645eu	11740eu	

## SELECTED PROGRAMS

## Sundays

- 1400 HCJB: Mountain Meditations. Sunday thoughts from HCJB's president.
- 1401 BBC: Feature. "It's God's World" is a series of phone-ins on the subject of religion; just dial 011 44 71 379 7444 (through 29th).
- 1410 Radio Finland: Perspectives. See S 0630.
- 1420 Radio Finland: Starting Finnish. See S 1315.
- 1430 BBC: Anything Goes. Bob Holness presents a variety of music and other recordings.
- 1430 HCJB: Moody Presents. Christian messages from the Moody Bible Institute.

## Mondays

- 1400 HCJB: Insight For Living. See M 1130.
- 1400 Radio Finland: Business Monday. See S 2300.
- 1405 BBC: Outlook. Conversation, controversy, and color from the UK and the world.
- 1410 Radio Finland: Press Review. See M 0645.
- 1415 Radio Finland: Highlights. See S 2310.
- 1430 BBC: Off The Shelf. See M 0430.
- 1430 HCJB: Through The Bible. J. Vernon McGee presents a book-by-book study of the Bible.

- 1445 BBC: Talks. Martin Redfern returns with re-runs of his "Journey To The Center Of The Earth" (through October 21st).

## Tuesdays

- 1405 BBC: Outlook. See M 1405.
- 1420 Radio Finland: Press Review. See M 1140.
- 1425 Radio Finland: Airmail. See M 2315.
- 1430 BBC: Off The Shelf. See M 0430.
- 1430 HCJB: Through The Bible. See M 1430.
- 1445 BBC: Classical Music. See M 0145.

## Wednesdays

- 1400 HCJB: Insight For Living. See M 1130.
- 1405 BBC: Outlook. See M 1405.
- 1420 Radio Finland: Press Review. See M 1140.
- 1425 Radio Finland: Sports Fare. See T 2315.
- 1430 BBC: Off The Shelf. See M 0430.
- 1430 HCJB: Through The Bible. See M 1430.
- 1445 BBC: Good Books. See M 0315.

## Thursdays

- 1400 HCJB: Insight For Living. See M 1130.
- 1405 BBC: Outlook. See M 1405.

- 1420 Radio Finland: Press Review. See M 1140.
- 1425 Radio Finland: The Fourth Generation. See S 1335.
- 1430 BBC: Off The Shelf. See M 0430.
- 1430 HCJB: Through The Bible. See M 1430.
- 1445 BBC: Recording Of The Week. See S 0315.

## Fridays

- 1400 HCJB: Insight For Living. See M 1130.
- 1405 BBC: Outlook. See M 1405.
- 1420 Radio Finland: Press Review. See M 1140.
- 1425 Radio Finland: Names In The News. See H 2315.
- 1430 BBC: Off The Shelf. See M 0430.
- 1430 HCJB: Through The Bible. See M 1430.
- 1445 BBC: Talks. See S 0445.

## Saturdays

- 1400 HCJB: Song Time. John DeBrine mixes music with a religious message.
- 1401 BBC: Sportsworld. Shortwave's "Wide World Of Sports" with Paddy Feeny.
- 1420 Radio Finland: Finnish History. See F 2315.
- 1430 HCJB: Let My People Think. See H 0400.



1500 UTC

**[11:00 AM EDT/8:00 AM PDT]**

## FREQUENCIES

1500-1530	BBC London	3915as 6190af 9740na 11775na 15310as	5975eu 6195eu 9750eu 11940af 15400af	6045eu 6195as 9760eu 12095eu 15420af	6180eu 9410eu 11750as 15070va 15575me
1500-1530	BBC London	7180as 17790af 21490af	15260na 17860af 21660af	17640va 17880af	17705eu 21470af
1500-1600	Cameroon Radio-TV	4850do			
1500-1600	CFCX Montreal	6005do			
1500-1600	CFRX Toronto	6070do			
1500-1600	CSM World Svc, Boston	9530pa 21670pa	13625pa	13760pa	15610pa
1500-1550	Deutsche Welle	9735af 17765af	11965af 21600af	13610af	17735af
1500-1555	FEBA Seychelles	11865af			
1500-1600 whfa	FEBA Seychelles	9590as	15330af		
1500-1600	FEBA Seychelles	9590as	11865as	15330as	
1500-1600	FEBC Manila	11685as			
1500-1600	HCJB Quito	15115na	17890na	21455na	25950na
1500-1600	KNLS Anchor Point, Alaska		9615as		
1500-1600	KTBN Salt Lake City	15590na			
1500-1600	KTWR Guam	11650as			
1500-1600	Radio 1, Accra, Ghana	4915do			
1500-1600	Radio 2, Accra, Ghana	7295do			
1500-1600	Radio Australia	5995va 9710va 13745va	6080va 9770va 17630va	7240va 11720va	9580va 12000va
1500-1600	Radio Bangladesh	4880do			
1500-1600	Radio Beijing	4200as	11815as	15165as	
1500-1600	Radio Beijing	7405am			
1500-1530	Radio Canada Int'l	11935eu 21545eu	15305eu	15325eu	17820eu
1500-1600 s	Radio Canada Int'l	11955	17820		
1500-1600	Radio Japan	11865am	21700eu		
1500-1600	Radio Moscow	6065va 11840na 12005va 12050va 15205va	7315va 11890va 12015va 12070va 15375va	9865va 11900va 12025va 15140va 15465va	11695va 11995va 12030va 15180va 15480va
1500-1600	Radio Moscow	15500va	15540va	15560va	15580va

		15595va	17560va	17570va	17600va
		17655va	17670va	17755va	17775va
		17795va	17810va	17815va	21615va
		21625va	21645va	21690va	21740va
1500-1600	Radio Moscow	21785va	21790va	21845va	
1500-1525	Radio Netherlands	5955eu	13770eu	15150eu	17575ee
		17605eu	21480eu		
1500-1600	Radio Nigeria	4990do	7285do		
1500-1530 as	Radio Norway	15355na	17790na		
1500-1600	Radio Pyongyang	9325va	9640va	9977va	11760va
1500-1530	Radio Romania Int'l	11775as	11940as	15250as	15335as
		17720as	17745as		
1500-1600	Radio RSA, Johannesburg		7230af	15210af	
1500-1530 sa	Radio Tanzania	5985af	9684af	11765af	
1500-1600	RTM Malaysia	7295do			
1500-1600	SBC Radio 1, Singapore	5010do	5052do	11940do	
1500-1600	SLBS, Sierra Leone	3316do	5980do		
1500-1600	Sri Lanka B'casting Corp.	6075as	9720as		
1500-1515 smwha	Ulaanbaatar R., Mongolia	9575as	13780as		
1500-1600	Voice of America	7125as	9645as	9700as	15205va
		15260as	15395as		
1500-1600	Voice of Ethiopia	7165af			
1500-1600 mtwhf	Voice of Kenya	4935do			
1500-1600	Voice of Myanmar	5990do			
1500-1600	Voice of Nigeria	7255af			
1500-1600	WHRI Noblesville	15105na	21840sa		
1500-1600	WRNO New Orleans	15420na			
1500-1600	WWCR Nashville	15690am			
1500-1600	WYFR Okeechobee	11580na	11830na	17750af	
1523-1530	R. Veritas Asia, Manila	15140			
1530-1600	BBC London	6190af	6195eu	6195as	7180as
		9410eu	9740na	9750eu	11750as
		11775na	11940af	12095eu	15070va
		15260as	15310as	15400af	17640va
		17705eu	17880af	21470af	21660af
1530-1600	Radio Sweden	17875na	21500na		
1530-1600	Radio Tanzania	5985af	9684af	11765af	
1530-1600	Radio Tirana	9500af	11835af		
1530-1600	Radio Zambia Int'l	9505af	11880af	17895af	
1530-1600	Sudan Nat'l B'casting Cor	9540do	9550do	11635do	
1530-1600	Swiss Radio Int'l	13685af	15430af	17830af	21630af
1530-1600 mtwha	Vatican Radio	6185eu			
1530-1540 mtwhfa	Voice of Greece	11645eu	15550am	17525am	
1545-1600	Vatican Radio	11715as	15090as	17870as	

## SELECTED PROGRAMS

### Sundays

- 1500 HCJB: Urban Alternative. A program for inner-city America.
- 1515 BBC: Concert Hall. Classical music recordings from the world's great concert halls (except 1st, 8th: From The Proms, excerpts from this year's Promenade Concerts).
- 1530 HCJB: Heaven And Home Hour. Christian messages of inspiration.

### Mondays

- 1500 HCJB: Sound Words. See M 1200.  
1515 BBC: Feature/Drama. See M 0101.  
1515 HCJB: Gateway To Joy. Contemporary women's issues from a Biblical perspective.  
1530 HCJB: Back To The Bible. A daily Bible study.

## Tuesdays

- 1500 HCJB: Sound Words. See M 1200.  
1515 BBC: A Jolly Good Show. Dave Lee Travis  
presents listener rock music requests.  
1515 HCJB: Gateway To Joy. See M 1515.  
1530 HCJB: Back To The Bible. See M 1530.

### Wednesdays

- 1500 HCJB: Sound Words. See M 1200.  
1515 BBC: Talks. See M 2315.  
1515 HCJB: Gateway To Joy. See M 1515.



*Noted British scientist Dr. Joseph Needham with Radio Beijing's reporter Xu Huazhen.*

- 1530 BBC: Comedy Show. "Girls Will Be Girls" features sketches and songs from the Bobo Girls. Whatever. (through 25th).  
1530 HCJB: Back To The Bible. See M 1530.

### Thursdays

- 1500 HCJB: Sound Words. See M 1200.  
1515 BBC: Music With Matthew. Brian Matthew with classical music selections.  
1515 HCJB: Gateway To Joy. See M 1515.  
1530 HCJB: Back To The Bible. See M 1530.

### Fridays

- 1500 HCJB: Sound Words. See M 1200.  
1515 BBC: Music Review. See H 2315.  
1515 HCJB: Gateway To Joy. See M 1515.  
1530 HCJB: Back To The Bible. See M 1530.

### Saturdays

- 1500 HCJB: Living Word. Program details not available at press time.  
1515 BBC: Sportsworld. See A 1401.  
1530 HCJB: Radio Reading Room. See S 0400.



**[12:00 PM EDT/9:00 AM PDT]**

1600-1630	Radio Polonia, Warsaw	6135eu	9540eu		
1600-1630 mtwhf	Radio Portugal	21530me			
1600-1700	Radio RSA, Johannesburg		7230af	15210af	17790af
1600-1700	Radio Tanzania	5985af	9684af	11765af	
1600-1700	Radio Zambia Int'l	9505af	11880af	17895af	
1600-1605	SBC Radio 1, Singapore	5052do	11940do		
1600-1700	SLBS, Sierra Leone	3316do	5980do		
1600-1700	Sri Lanka B'casting Corp.	6075as	9720as		
1600-1700	TWR Swaziland	9600af			
1600-1640	UAE Radio, Dubai	11795af	13675eu	15320eu	15400af
		21605eu			
1600-1610	Vatican Radio	11715as	15090as	17870as	
1600-1630 mtwhf	Vatican Radio	6248eu	7250eu	9645eu	11740eu
		15210eu			
1600-1630	Voice of America	3980eu	7125as	9 645as	9700va
		15205va	15260as	15395as	
1600-1700	Voice of America	9575af	11920af	15410af	15580af
		17800af	21625af		
1600-1700 mtwhf	Voice of Kenya	4935do			
1600-1700	Voice of Nigeria	7255af			
1600-1700	Voice of the Somali Peopl	6320do			
1600-1630	Voice of Vietnam	9840eu	12020eu	15010eu	
1600-1700	WHRI Noblesville	15105am	17830am		
1600-1700	WRNO New Orleans	15420			
1600-1700	WWCR Nashville	15690am			
1600-1700	WYFR Okeechobee	11580am	11830am	15355am	17750af
		21525eu	21615af		
1610-1615 mtwhf	Radio Botswana	5955af	7255af		
1615-1700	Swiss Radio Int'l	11955eu			
1630-1700 mwf	Alma Ata Radio	5035do	5915do	6135do	
1630-1700	BBC London	3915as	5975as	6190af	6196eu
		9410eu	9630af	9740me	11750as
		11775na	11940af	12095eu	15070eu
		15260na	15310as	15400af	15420af
		17640va	17695eu	17860af	17880af
1630-1700	BBC London	21470af	21660af		
1630-1700	HCJB Quito	21455	21480	25950	
1630-1700	Radio Austria	6155eu	11780as	13730eu	21490eu
1630-1700	Radio Cairo	15255af			
1630-1700	Radio Canada Int'l	7150as	9555as		
1630-1700 mtwhfa	Radio Netherlands	6020af	15570af		
1630-1700	Radio Polonia, Warsaw	9525eu	11840eu		
1630-1700 mtwhf	RTV Morocco	15335af	15360af	17595af	
1630-1700	RTV Rwandias	3330	6055		
1630-1700	Voice of America	3980eu	6040eu	7125as	9645as
		9700va	11740va	15205va	15245va
		15260as	15395va		

1600 KSDA, Guam: Micronesian Snapshots. The news, music, and culture of Micronesia.  
1615 BBC: Sportsworld. See A 1401.  
1615 KSDA, Guam: Listener Mailbox. See A 0200.  
1630 HCJB: Quito Calling. See S 1630.  
1630 KSDA, Guam: DX Aslawaves. See S 0230.  
1645 KSDA, Guam: Probe. See S 0245.



## 1700 UTC

## FREQUENCIES

## [1:00 PM EDT/10:00 AM PDT]

1700-1730	BBC London	3255af	7160me	15260na	21470af	1700-1800	Radio Zambia Int'l	9505af	11880af	17895af	
		21660af				1700-1800 mtwhfa	RTV Morocco	15335af	17595af	17815af	
1700-1730	BBC London	3915as	5975as	6005af	6180eu	1700-1728	SLBS, Sierra Leone	3316do	5980do		
		6190af	6195eu	9410eu	9630af	1700-1730	Sri Lanka B'casting Corp.	6075as	9720as		
		9740eu	11750as	11775na	12095eu	1700-1730	TWR Swaziland	3200af	9520af		
		15070eu	15310as	15400af	15420af	1700-1800	Voice of America	3980va	6040va	7125as	9645as
		17640va	17695eu	17860af	17880af			9700va	9760va	11760eu	15205va
1700-1800	BSKSA Saudi Arabia	9705eu	9720eu					15245eu	15260eu	15395as	
1700-1800	CFCX Montreal	6005do				1700-1800	Voice of America	9575af	11920af	15410af	15580af
1700-1800	CFRX Toronto	6070do						17800af	21625af		
1700-1800	CSM World Svc, Boston	11580as	13625as	15610am	17555am	1700-1800 mtwhf	Voice of Kenya	4935do			
		21640af				1700-1800	Voice of Nigeria	7255af			
1700-1800	HCJB Quito	21455am	21480am	25950na		1700-1800	WHRI Noblesville	15105	17830		
1700-1800	KSDA Guam	13720as				1700-1800	WMLK Bethel	9465eu			
1700-1800	KTBN Salt Lake City	15590				1700-1800	WRNO New Orleans	15420			
1700-1745	R Surinam Intl via Brazil	17835eu				1700-1800	WWCR Nashville	15690			
1700-1800	R. E. Africa, Eq. Guinea	7190af				1700-1800	WYFR Okeechobee	13760am	21500eu		
1700-1800	Radio 1, Accra, Ghana	4915do				1706-1800	Radio 2, Accra, Ghana	3366do			
1700-1705	Radio 2, Accra, Ghana	7295do				1715-1745	BBC London	9560ca	21660ca		
1700-1800	Radio Australia	5995va	6060va	6080va	7240va	1715-1730	Radio Buea, Cameroon	3970do			
		9580va	11910va	12000va	13605va	1725-1742	R Surinam Intl via Brazil	17750eu			
		13745va	17630va			1728-1800	SLBS, Sierra Leone	3316do			
1700-1710	Radio Bafoussam, Cameroon	4000do				1730-1800	BBC London	3255af	7160me	21470af	21660af
1700-1800	Radio Beijing	4130af	7405af	8260af	9570af			3915as	5975as	6005af	6180eu
		11575af						6190af	6195eu	9410eu	9630af
1700-1800	Radio Cairo	15255af						9740me	11775na	12095eu	15070eu
1700-1730	Radio Canada Int'l	7235eu	9555eu	15325eu	17820eu			15260na	15310as	15400af	15420af
		21545eu						17640va	17695eu	17860af	17880af
1700-1730	Radio Georgia, Tbilisi	12070eu				1730-1800	BRT Brussels	21815af			
1700-1800	Radio Japan	7140as	11815as	11865na	15345me	1730-1745	Radio Bayrak, Cyprus	6150va			
1700-1800	Radio Moscow	7305va	11630va	11840na	11890va	1730-1745 a	Radio Douala, Cameroon	4795do			
		11940va	11960va	11995va	12005va	1730-1800 a	Radio Latvia, Riga	5935eu			
		12015va	12030va	12035va	12050va	1730-1800	Radio Romania Int'l	15365af	17720af	17745af	
		15185va	15375va	15500va	15540va	1730-1800	Radio Sofia, Bulgaria	11660eu	11720eu	11765af	15330eu
		17600va	17655va	15500va	15540va			17780af	17825af		
1700-1800	Radio Moscow	17600va	17655va	17670va	17710va	1730-1800	TWR Swaziland	3200af			
		17720va	17775va	17785va	17850va	1730-1800	Vatican Radio	17710af	17730af	21650af	25950
		21645va	21690va	21740va	21790va	1740-1800	Cameroon Radio-TV	4850do			
		21845va				1745-1800 mtwhfa	Radio Douala, Cameroon	4795do			
1700-1725	Radio Netherlands	6020af	15570af			1745-1800	RTV Madagascar	3232do	3286do	5005do	
1700-1800	Radio Nigeria	3326do	4990do			1800-1900	All India Radio, Delhi	11935af			
1700-1730 as	Radio Norway	9655eu				1800-1830	BBC London	3255af	3955eu	5975as	6180eu
1700-1800	Radio Pakistan	11570eu	15550eu					6190af	6195eu	7160me	7325af
1700-1800	Radio Pyongyang	9325va	9640va	9977va	11760va			9410eu	9600af	9740me	11750as
1700-1800	Radio RSA, Johannesburg	7230af	15210af	17790af				12095eu	15070eu	15310as	15400af
1700-1730	Radio Sweden	6065eu	9615eu					17640eu	17880af		
1700-1800	Radio Tanzania	5985af	9684af	11765af							

## 1800 UTC

## FREQUENCIES

## [2:00 PM EDT/11:00 AM PDT]

1800-1900	BSKSA Saudi Arabia	9705eu	9720eu			1800-1900	Radio Nigeria	3326do	4990do		
1800-1900	Cameroon Radio-TV	4850do				1800-1830 as	Radio Norway	17755na			
1800-1900	CFCX Montreal	6005do				1800-1900	Radio Sofia, Bulgaria	11660eu	11720eu	11765af	15330eu
1800-1900	CFRX Toronto	6070do						17780af	17825af		
1800-1900	CSM World Svc, Boston	13625as	15610am	17555am	21640af	1800-1830	Radio Sweden	6065va	9655va	11900va	
1800-1900	KTBN Salt Lake City	15590				1800-1900	Radio Tanzania	5985af	9684af	11765af	
1800-1810	Malawi B'casting Corp.	3381do				1800-1900	Radio Zambia Int'l	9505af	11880af	17895af	
1800-1900	R. E. Africa, Eq. Guinea	7190af				1800-1900	Radiobras, Brasilia	15265eu			
1800-1900	Radio 1, Accra, Ghana	4915do				1800-1830	RTV Congolaise	3265af	4765af		
1800-1900	Radio 2, Accra, Ghana	7295do				1800-1900	SLBS, Sierra Leone	3316do			
1800-1900	Radio Australia	5995va	6060va	6080va	7240va	1800-1845	TWR Swaziland	3200af	9600af		
		9580va	9860va	11910va		1800-1900	VOA Europe	21705eu			
		4750do				1800-1900	Voice of America	3980eu	6040va	9700va	9760va
1800-1840 w	Radio Bertoua, Cameroon							11760eu	15205eu	15245eu	
1800-1830	Radio Cairo	15255af				1800-1900	Voice of America	9575af	11920af	15410af	15580af
1800-1830	Radio Canada Int'l	13670af	15260af	17820af				17800af	21625af		
1800-1845 mtwhfa	Radio Douala, Cameroon	4795do				1800-1900	Voice of Ethiopia	9662af			
1800-1900	Radio for Peace Int'l	13660	2	21566	2	1800-1900 mtwhf	Voice of Kenya	4935do			
1800-1900	Radio Korea	15575eu				1800-1830	Voice of Vietnam	9840eu	12020eu	15010eu	
1800-1900	Radio Moscow	6065va	11655va	11765va	11840na	1800-1900	WHRI Noblesville	13760na	15105sa		
		11850va	11900va	11995va	12050va	1800-1900	WMLK Bethel	9465eu			
		15230va	15330va	15335va	15375va	1800-1900	WRNO New Orleans	15420na			
		15415va	15520va	15535va	15540va	1800-1900	WWCR Nashville	15690na			
		15595va	17600va	17655va	17670va	1800-1900	WYFR Okeechobee	21500na			
1800-1900	Radio Moscow	21585va	21740va	21750va	21845va	1815-1900	Radio Bangladesh	12030as	15255as		
1800-1900	Radio Mozambique	3265af	4855af	9618af							
1800-1900	Radio New Zealand Int'l	15120pa									

continued



## continued

1815-1830	Radio Voice of Lebanon	5me	6549.5						
1830-1900	BBC London	3255af	3955eu	6005af	6180eu				
		6190af	6195eu	7325eu	9410eu				
		9600af	11750as	12095eu	15070eu				
		15400af	17880af						
1830-1900	Radio Afghanistan	7310eu	9635eu						
1830-1900 as	Radio Canada Int'l	15260eu	17820eu						
1830-1900	Radio Finland	6120eu	9550eu	11755eu	15185eu				
1830-1900	Radio Netherlands	6020af	15570af	17605af	21685af				
1830-1855	Radio Polonia, Warsaw	5995eu	6135eu	7285eu					
1830-1900	Radio Sweden	6065va	15270va						
1830-1900	Radio Tirana	7120eu	9480eu						
1830-1900	Sri Lanka B'casting Corp.	9720eu	15120eu						
1830-1900	Swiss Radio Int'l	9885af	11955af						
1830-1900	VOIRI, Teheran, Iran	6035eu	9022eu						
1840-1850 mtwhfa	R National de Venezuela	9540om							
1840-1850	Voice of Greece	11645af	15650af						
1845-1900	Ghana B'casting Corp.	6130af							
1845-1900	RTV Guinea	4900af	7125af						
1845-1900 s	RTV Mali	4783do	5995do	7285do	11960do				
1845-1900	TWR Swaziland	3200af							

## 1900 UTC

## FREQUENCIES

## [3:00 PM EDT/12:00 PM PDT]

1900-2000	All India Radio, Delhi	11935af							
1900-1930	BBC London	3255af	3955eu	6005af	6180eu				
		6190af	6195eu	7160me	7325eu				
		9410eu	9600af	9630af	11750pa				
		12095eu	15070eu	15400af	17880af				
1900-2000	BSKSA, Saudi Arabia	9705eu	9720eu						
1900-1945	Cameroon Radio-TV	4850na							
1900-2000	CFCX Montreal	6005do							
1900-2000	CFRX Toronto	6070do							
1900-2000	CSM World Svc, Boston	13625as	17555am	21640af	21780am				
1900-1950	Deutsche Welle	9760af	11785af	11810af	13790af				
		15350af	15390af	17810af					
		6130af							
1900-2000	Ghana B'casting Corp.	15270eu	17790eu	21455eu	21480eu				
1900-2000	HCJB Quito	29590eu							
1900-1930	Kol Israel	11587va	11605va	11675va	15640va				
		17630va	17685va						
1900-2000	KTBN Salt Lake City	15590							
1900-2000	R. E. Africa, Eq. Guinea	7190af							
1900-2000	Radio 1, Accra, Ghana	4915do							
1900-2000	Radio 2, Accra, Ghana	7295do							
1900-2000	Radio Algiers	9510me	9535me						
1900-2000	Radio Australia	5995va	6060va	6080va	7240va				
		9580va	9860va	11910va	12000va				
		13605va	13745va						
1900-2000	Radio Beijing	6955af	9440af	11515af					
1900-1930	Radio Canada Int'l	5995eu	7235eu	13650eu	15325eu				
		17875eu	21675eu						
1900-1930 mtwhf	Radio Canada Int'l	13670af	15260af	17820af					
1900-2000	Radio for Peace Int'l	13660 2	21566 2	25945am					
1900-2000	Radio Havana Cuba	17705eu							
1900-2000	Radio Moscow	7305va	11630va	11765va	11840na				
		11890va	13605va	15185va	15330va				
		15375va	15540va	15560va	15580va				
		1555va	17670va	17695va					
1900-1925	Radio Netherlands	6020af	15570af	17605af	21685af				
1900-2000 smtwhf	Radio New Zealand Int'l	15120pa							
1900-2000	Radio Nigeria	3326do	4990do						
1900-1930 as	Radio Norway	15175eu	17750pa						
1900-1915	Radio Tanzania	5985af	9684af	11765af					
1900-2000	Radio Zambia Int'l	9505af	11880af	17895af					
1900-2000	RAE Buenos Aires	15345eu							
1900-2000 s	RTV Morocco	15335af							
1900-2000	SLBS, Sierra Leone	3316do							
1900-2000	Spanish Foreign Radio	9875eu	11790eu	15375af	15395eu				
1900-2000	Sri Lanka B'casting Corp.	9720eu	15120eu						
1900-2000	TWR Swaziland	3200af	3240af						
1900-2000	VOA Europe	21705							
1900-2000	Voice of America	3980eu	6040va	9525as	9700va				
		9760va	11760va	11870as	15180as				
		15205va	15245as						
		9575af	11920af	15410af	15580af				
		17800af	21625af						
1900-2000 mtwhf	Voice of Kenya	4935do							
1900-2000	Voice of Nigeria	7255af							
1900-1930	Voice of Vietnam	9840eu	12020eu	15010eu					
1900-1930	VOIRI, Teheran, Iran	6035va	9022va						
1900-2000	WHRI Noblesville	13760	17830						
1900-2000	WMLK Bethel	9465eu							
1900-2000	WRNO New Orleans	15420							
1900-2000	WWCR Nashville	15690							

1900-2000	WYFR Okeechobee	15355af	21615eu						
1910-1915	Radio Botswana	3356af							
1920-1930	Radio Buea, Cameroon	3970do							
1920-1930	Voice of Greece	7430	9395						
1930-2000	BBC London	3255af	3955eu	6005af	6180eu				
		6190af	6195eu	7160me	7325eu				
		9410eu	9600af	9630af	11750pa				
		12095eu	15070eu	15400af	17880af				
1930-2000 tes	KFBS Saipan	9475af							
1930-1940	Radio Austria Int'l	5945eu	6155eu	12010me	13730af				
1930-1940 irr	Radio Burkina Faso	4815af	7230af						
1930-2000	Radio Canada Int'l	6170eu	9650eu	9670eu	13650eu				
		15325eu	17825eu	21675eu					
1930-2000	Radio Romania Int'l	5990eu	7195eu	9690eu					
1930-2000	Radio Sweden	6065va	9655va						
1935-1955	RAI, Rome	7275eu	9710eu	11800eu					
1935-1945	RTV Togo	5047af							
1940-2000 smwha	Ulaanbaatar R., Mongolia		11850eu	12015eu					
1945-2000	Radio Sofia, Bulgaria	11765eu	17780af	17825af					
1950-2000	Sudan Nat'l B'casting Cor	9540do	9550do	11635do					
1950-2000	Vatican Radio	9645va	11625va	15090va					

## PC + M1000 = SW Excitement



Turn your IBM computer (or clone) into a powerful intercept device! The **Universal M-1000 Decoder Card** requires just one slot in your PC. Your computer can open up a new world of listening (and seeing) opportunities! You can decode standard modes such as Morse Code, Baudot RTTY and Sitor A/B. Advanced diplo.-military modes such as ARQ-M2, ARQ-E and ARQ-E3 are also supported. ASCII and Packet modes are even featured. For FAX reception (only) your computer must have either an EGA or VGA monitor (color or mono). The video quality of your FAX intercepts will amaze you. Advanced FAX imaging includes false-color and zoom features. FAX images as well as text traffic can be saved to disk for later retrieval or analysis. Despite the sophistication of this device, operation is easy through on-screen menus, status indicators and help windows. A new *datascope* feature operates in both RTTY and FAX modes. The M-1000 comes with an informative manual and software on both 3 1/2" and 5 1/4" diskettes. **Only \$399.95 (+\$5).**

**UNIVERSAL RADIO**  
1280 Aida Dr. Dept. MT  
Reynoldsburg, OH 43068  
☎ Toll Free: 800 431-3939  
☎ In Ohio: 614 866-4267

☛ Call or write to receive your **FREE** 92 page catalog.

Universal has been serving radio enthusiasts since 1942.



## 2000 UTC

## FREQUENCIES

## [4:00 PM EDT/1:00 PM PDT]

2000-2030	BBC London	3255af	3955eu	5975eu	6005af	2000-2030	Radio Sofia, Bulgaria	11765eu	17780af	17825af
		6180eu	6190af	6195eu	7160me	2000-2100 s	Radio Zambia Int'l	9505af	11880af	17895af
		7180pa	7325eu	9410eu	9600as	2000-2100	SLBS, Sierra Leone	3316do		
		9630af	11750pa	12095eu	15070eu	2000-2030	Swiss Radio Int'l	3985eu	6165eu	9535eu
		15260sa	15340pa	15400af	17880af	2000-2100	TWR Swaziland	3200af	3240af	
2000-2100	BSKSA, Saudi Arabia	9705eu	9720eu			2000-2010 smwha	Ulaanbaatar R., Mongolia	11850eu	12015eu	
2000-2100	CFCX Montreal	6005do				2000-2100	Voice of America	3980eu	6040va	9700va
2000-2100	CFRX Toronto	6070do						11760va	15205va	15245va
2000-2100	CSM World Svc, Boston	9455as	13625pa	13770am	15610eu	2000-2100	Voice of America	9570af	15410af	15580af
		17555sa						21485af	21625af	
2000-2100 tes	KFBS Saipan	9475af				2000-2100	Voice of Indonesia	7125as	9675as	11752as
2000-2100	King of Hope, Lebanon	6280me				2000-2010 mtwhf	Voice of Kenya	4935do		
2000-2100	KTBN Salt Lake City	15590				2000-2030	Voice of Nigeria	7255af		
2000-2100	KVOH Los Angeles	17775am				2000-2100	Voice of Turkey	9795eu		
2000-2010 w	Malawi B'casting Corp.	3381do				2000-2100	WHRI Noblesville	13760af	15105sa	
2000-2100	R. E. Africa, Eq. Guinea	7190af				2000-2100	WRNO New Orleans	15420		
2000-2100	R. for Peace Int'l	7375na	13630na	15030na	21465na	2000-2100	WWCR Nashville	15690		
2000-2100	Radio 1, Accra, Ghana	4915do				2000-2100	WYFR Okeechobee	15566eu	17612af	21525eu
2000-2100	Radio 2 Accra, Ghana	7295do				2005-2100	Radio Damascus	12085na	15095na	
2000-2100	Radio Australia	5995va	6060va	6080va	7240va	2010-2100 sa	Voice of Kenya	4935do		
		9860va	11930va	12000va	13605va	2015-2030	V. de la Rev., Benin	4870af	5025af	
		13745va	17795va			2015-2045 sth	V. of the Black Cockerel	9700af		
2000-2100	Radio Beijing	4130eu	8260eu	9920eu	11500eu	2020-2030 mtwhf	Voice of Greece	9395eu	11645eu	
2000-2100	Radio Beijing	9440af	11715af	15110af		2025-2045	RAI, Rome	7235me	9575me	11800me
2000-2030	Radio Georgia, Tbilisi	11760eu				2030-2100	BBC London	3255af	3955eu	5975ca
2000-2100	Radio Havana Cuba	17705eu						6180eu	6190af	6195eu
2000-2100	Radio Moscow	1143eu	6000va	7330va	11520va			7325eu	9410eu	11750pa
		11630va	11765va	11840na	11890va			15070eu	15260sa	15340pa
		11960va	12050va	12060va	13605va	2030-2100	Radio Cairo	15375af		
		15185va	15330va	15500va	15540va	2030-2100	Radio Korea	6480eu	7550af	15575eu
		15560va	15580va	15595va	17695va	2030-2100	Radio Netherlands	7285af	9860af	9895af
		21740va						13700af		
2000-2100	Radio Moscow	15120pa				2030-2100	Radio Sweden	6065na		
2000-2100 smtwhf	Radio New Zealand Int'l	3326do	4990do			2030-2100	Radio Tallin, Estonia	5925eu	9560eu	
2000-2100	Radio Nigeria	15165na				2030-2100	Voice of Vietnam	9840eu	12020eu	15010eu
2000-2030 as	Radio Norway	9525eu	11840eu			2045-2100	All India Radio, Delhi	7412eu	9665eu	9910eu
2000-2030	Radio Polonia, Warsaw	11740eu						11715eu	15265eu	11620eu
2000-2030 mtwhf	Radio Portugal	9345va	9640va	9977va		2050-2100	Vatican Radio	6248eu	7250eu	
2000-2100	Radio Pyongyang	5990eu	7195eu	9690eu						
2000-2030	Radio Romania Int'l									

## 2100 UTC

## FREQUENCIES

## [5:00 PM EDT/2:00 PM PDT]

2100-2130	BBC London	6195as	5975ca	6005af	3255af	2100-2200	Radio Kiev	5960eu		
		3955eu	6180eu	15340pa	11750pa	2100-2130	Radio Korea	6480eu	7550af	15575eu
		12095eu	15070na	15260sa	15400af	2100-2200	Radio Moscow	1143eu	1494eu	7300va
		9590na	9410eu	7325eu				9740va	11520va	11630va
2100-2200	CFCX Montreal	6005do						11675va	11685va	11745va
2100-2200	CFRX Toronto	6070do						11850va	11890va	12050va
2100-2200	CSM World Svc, Boston	9455as	13625pa	13770am	17555sa			15130va	15355va	15385va
		15610eu				2100-2200	Radio Moscow	15500va	15535va	15560va
		15350as	15360as					15595va	17655va	17735va
2100-2150	Deutsche Welle	9760as	9765as	11785as	13780as			21630va		
		6280me				2100-2125	Radio Netherlands	7285af	9860af	9895af
2100-2130	King of Hope, Lebanon	15590						13700af		
2100-2200	KTBN Salt Lake City	17775				2100-2200	Radio New Zealand Int'l	15120pa		
2100-2110	KVOH Los Angeles	3381do				2100-2200	Radio Nigeria	3326do	4990do	
2100-2200	Malawi B'casting Corp.	7190af				2100-2130 mtwhf	Radio Portugal	15250af		
2100-2200	R. E. Africa, Eq. Guinea	7375na	13630na	15030na	21465na	2100-2130	Radio Romania Int'l	5990eu	6105eu	7105eu
2100-2200	R. for Peace Int'l	3355af	9535af					9690eu	11940eu	7195eu
2100-2200	R. Nacional de Angola	4915do						9505af	11880af	17895af
2100-2200	Radio 1, Accra, Ghana	7295do				2100-2200	Radio Zambia Int'l	15120as		
2100-2200	Radio 2, Accra, Ghana	6060va	11880va	11930va	13705va	2100-2200	SLBS, Sierra Leone	3316do		
2100-2200	Radio Australia	15160va	15240va	15320va	17715va	2100-2200	Spanish Foreign Radio	9875af		
		17795va	21740va			2100-2130	Swiss Radio Int'l	12035af	13635af	15525af
2100-2200	Radio Beijing	4130eu	9920eu	11500eu		2100-2130	Swiss Radio Int'l	3985eu	6165eu	9535eu
2100-2200	Radio Budapest	6110eu	9835eu	11910eu		2100-2115	TWR Swaziland	3240af		
2100-2130	Radio Canada Int'l	5995eu	7235eu	13650eu		2100-2110	Vatican Radio	6248eu	7250eu	
2100-2200	Radio Canada Int'l	15325eu	17875eu			2100-2130	Vatican Radio	17710af	17730af	21650af
2100-2105	Radio Damascus	12085na	15095na			2100-2200	Voice of America	3980eu	6040va	9700va
2100-2145	Radio Federal Yugoslavia	5960eu	11735na					11760va	11870as	11960va
2100-2200	Radio Japan	11815me	15230eu	15270eu	17810as			15205va	15245as	17735as
		17890as								

continued



## continued

2100-2200	Voice of America	15410af	15580af	17800af	21485af
		21625af			
2100-2200	WHRI Noblesville	13760	17830		
2100-2200	WRNO New Orleans	15420			
2100-2200	WWCR Nashville	15690			
2100-2200	WYFR Okeechobee	15566af	17612af	21525eu	21615eu
2110-2200	Radio Damascus	12085na	15095na		
2115-2130 mtwhf	BBC London Caribbean Rpt.	17715ca			
2115-2130 s	R. Republik Indonesia	6070do			
2115-2200	Radio Cairo	9900eu			
2130-2200	BBC London	3255af	3955eu	5975ca	6005af
		6180eu	6195as	7325eu	9410eu
		9590na	11750pa	12095eu	15070na
		15260sa	15340pa	15400af	
2130-2200	BBC London Falkland Is Sv	13660sa			
2130-2200	HCBJ Quito	17790eu	21455eu	21480eu	25950eu

2130-2200	smtwhf	King of Hope, Lebanon	6280me
2130-2200		Kol Israel	11587va 11605va 15100va 15640va
		17575va 17685va	
2130-2200		R. Alma Ata, Kazakhstan	3955as 4400as 5035as 5260as 5960as 5970as 9505as 15215as 15315as 15385as 17605as 17715as 17730as
2130-2145		Radio Buea, Cameroon	3970do
2130-2200		Radio Canada Int'l	11880af 15150af 17820af
2130-2200		Radio Finland	6120eu 11755eu
2130-2200		Radio Tirana	7245eu 9480eu
2130-2200		Radio Vilnius, Lithuania	6100eu 9625eu 9710eu
2140-2150	mtwhfa	R Nacional de Venezuela	9540
2145-2200		Cameroon Radio-TV	4850na
2145-2200		Radio Sofia, Bulgaria	11660eu 11710na 15110eu 15330na 15370eu 17825na

**2200 UTC**

## FREQUENCIES

**[6:00 PM EDT/3:00 PM PDT]**

2200-2230	All India Radio, Delhi	7412eu	9665eu	9910eu	11620eu
		11715eu	15265eu		
2200-2300	BBC London	5975na	6195as	9410eu	9570pa
		9590na	9915ca	11750sa	11945as
		11955as	12095na	15070na	15260sa
		15340as	15400af	17830as	
2200-2225	BRT, Brussels	5910eu	9925eu	15515af	
2200-2215	Cameroon Radio-TV	4850na			
2200-2300	CFCX Montreal	6005do			
2200-2300	CFRX Toronto	6070do			
2200-2300	CSM World Svc, Boston	9465na	13625as	15405as	17555sa
		15300af			
2200-2230 s	KGEI San Francisco	15280sa			
2200-2300	KTBN Salt Lake City	15590			
2200-2300 sa	R. E. Africa, Eq. Guinea	7190af			
2200-2300	R. for Peace Int'l	13630ca	21465ca	15030am	
2200-2300	Radio 1, Accra, Ghana	4915do			
2200-2300	Radio 2, Accra, Ghana	7295do			
2200-2300	Radio Australia	11880va	11930va	13705va	15160va
		15240va	15320va	17715va	17795va
		21740va			
2200-2210	Radio Bafoussam, Cameroon		4000do		
2200-2230	Radio Beijing	3985eu			
2200-2245	Radio Cairo	9900eu			
2200-2230	Radio Canada Int'l	5960na	9755na	11905as	13670ca
2200-2210	Radio Damascus	12085na	15095na		
2200-2300	Radio Havana Cuba	7215eu			
2200-2300	Radio Moscow	1494eu	9800va	11520va	11675va
		11710na	11985va	12050va	12060va
		15355va	15425va	15560va	15580va
		15595va	17655va	21690va	
2200-2300	Radio New Zealand Int'l	15120pa			
2200-2300	Radio Nigeria	3326do	4990do		
2200-2230 as	Radio Norway	21705va			
2200-2230	Radio Prague	5930eu	6055eu	7345eu	
2200-2230 a	Radio Republik Indonesia	3385do	4805do		
2200-2300	Radio Sofia, Bulgaria	11660eu	11710na	15110eu	15330na
		15370eu	17825na		
2200-2230	Radio Sweden	6065va			
2200-2215	Radio Zambia Int'l	9505af	11880af	17895af	
2200-2225	RAI, Rome	5990as	9710as	11800as	
2200-2300 smtwha	RTM Malaysia	7295do			
2200-2218	RTV Congolaise	4765do	5985do		
2200-2300	SBC Radio 1, Singapore	5010do	5052do	11940do	
2200-2300	SLBS, Sierra Leone	3316do			
2200-2300	UAE Radio Abu Dhabi	13605na	15305na	17855na	
2200-2300	V. of Free China, Taiwan	17750eu	21720eu		
2200-2300	Voice of America	6095as	7120va	9770as	11760as
		15185va	15215va	15255as	15290as
		15305va	17735as	17810as	17820as

		17885va			
2200-2300	Voice of Turkey	7225eu	9445na	9685eu	17880as
2200-2300	WHRI Noblesville	13760na	17830sa		
2200-2300	WRNO New Orleans	13720na			
2200-2300	WWCR Nashville	15690na			
2200-2300	WYFR Okeechobee	17612af	21525eu		
2205-2300	Vatican Radio	7125as	9615as	11830as	

## MONITORING TIMES--

America's fastest growing monitoring hobby magazine! To subscribe just send the information below with your payment to *Monitoring Times*, P.O. Box 98, Brasstown, NC 28902.

**U.S.** (mailed second class\*):

☐ 1 Year \$19.50 (12 Issues)    ☐ 2 Years \$37.00 (24 Issues)    ☐ 3 Years \$54.00 (36 Issues)

\* If you prefer first class mail in an envelope, add \$25.00 per year (i.e., one year = \$44.50)

*Payment received by the 10th of the month will receive next month's issue. Current or back issues, when available, can be purchased for \$4.50 each (includes 1st class mailing in U.S.)*

### Canada, Mexico and Overseas:

(mailed in an envelope second class\*)

☐ 1 Year \$28.00    ☐ 2 Years \$54.00    ☐ 3 Years \$78.00

\* If you prefer air mail, please write for rates.

*All foreign subscriptions must be paid by Visa, Mastercard, International Bank or Postal Money Order in U.S. funds.*

NAME \_\_\_\_\_

ADDRESS

CITY

STATE

ZIP

Month

Year

☐ Mastercard    ☐ Visa

--	--	--	--

[illegible]



2300 UTC

[7:00 PM EDT/4:00 PM PDT]

## FREQUENCIES

2230-2300	Radio Polonia, Warsaw	5995eu	6135eu	7270eu	9675eu	2300-0000	Radio Orion, South Africa	4810af
2230-2300	Radio Tirana	7215eu	9480eu			2300-0000	Radio Pyongyang	11700na 13650na
2230-2300 mtwhf	RTV Congolaise	4765do				2300-0000	Radio Sofia, Bulgaria	11660eu 11710na 15110eu 15330na
2230-2300	Swiss Radio Int'l	6190eu						15370eu 17825na
2240-2225	Voice of Greece	11645am				2300-0000	Radio Thailand	4830as 9655as 11905as
2300-0000	AWR Costa Rica	9725ca 11825ca				2300-2330	Radio Vilnius, Lithuania	11790na 13645na 15180na 15455na
2300-2330	BBC London	5975na 6175na 6195as 7145as						15485na
		9410eu 9570pa 9590na 9915sa				2300-0000 smtwha	RTM Malaysia	7295do
		11750sa 11945as 11955as 12095na				2300-0000	SBC Radio 1, Singapore	5010do 5052do 11940do
		15070na 15260sa 15340pa 15400af				2300-0000	SLBS, Sierra Leone	3316do
2300-0000	CFCX Montreal	6005na				2300-0000	UAE Radio, Abu Dhabi	13605na 15305na 17855na
2300-0000	CFRX Toronto	6070do				2300-2330	Vatican Radio	6185eu
2300-0000	CSM World Svc, Boston	9465na 13625as 15405as 15300af				2300-0000	Voice of America	7120as 9530va 9770as 11760as
		17555sa						11905va 11960va 15185as 15225va
2300-0000	KSDA Guam	15610as						15290as 15305as 15445va 17735as
2300-0000	KTBN Salt Lake City	15590na						17820as 17885va
2300-0000	R. for Peace Int'l	7375na 13630na 15030na 21465na				2300-0000	WHRI Noblesville	9495na 13760sa
2300-2305	Radio 1, Accra, Ghana	4915do				2300-0000	WRNO New Orleans	13720na
2300-2305	Radio 2, Accra, Ghana	7295do				2300-0000	WWCR Nashville	15690na
2300-0000	Radio Australia	11880va 11930va 13605va 15160va				2300-0000	WYFR Okeechobee	5985na 11915na
		15240va 15320va 17715va 17795va				2305-2355	Radio Polonia	5995eu 7270eu
		21740va				2315-0000	All India Radio, Delhi	9535as 9910as 11715as 11745as
2300-2330	Radio Canada Int'l	9755na 11730ca 13670na 11940ca						15110as
		15235sa				2330-0000	BBC London	5975na 6175na 6195as 7145as
2300-0000	Radio Japan	11735eu 11815am 15195as 15230am						9570pa 9590na 9915sa 11750sa
		17810pa 21610as						11945as 11955as 12095na 15070na
2300-0000	Radio Moscow NAS	11690na 11710na 11780na 11985na				2330-0000	BRT Brussels	13655na 13710na
		12050na 13605na 15140na 15355na				2330-0000	Radio Canada Int'l	5960na 9755na 13670na
		15425na 15480na 15550na 15560na				2330-0000	Radio Sweden	9695la 11705la
		15580na 15590na 15595na 16190na				2330-0000	Radio Tirana	6120na 9760na 11825na
		17655na 17735na 17850na 17890na				2330-0000	Voice of Vietnam	9840as 12020as 15010as
2300-0000	Radio Moscow NAS	21690na						
2300-0000	Radio New Zealand Int'l	15120pa						

## SELECTED PROGRAMS

Sundays

- 2300 KSDA, Guam: Music Scrapbook. Details unavailable at press time.
- 2300 Radio Finland: Business Monday. A look at developments in the world of business and finance.
- 2300 Radio For Peace Int'l: Food For The Thoughtful. Current dietary trends and how they affect our health.
- 2310 Radio Finland: Highlights. Media and cultural news from Finland.
- 2315 KSDA, Guam: Bible in Living Sound. Dramatized Bible stories.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: United Nations. Current events programming produced by UN Radio.
- 2350 Radio For Peace Int'l: Undercurrents. See S 0550.

Mondays

- 2300 KSDA, Guam: Music Scrapbook. See S 2300.
- 2300 Radio For Peace Int'l: Peace Talks. Brief talks on subjects such as peace education and development and peace.
- 2310 Radio Finland: Press Review. See M 0645.
- 2315 KSDA, Guam: Bible in Living Sound. See S 2315.
- 2315 Radio Finland: Airmail. See S 1325.
- 2320 Radio Finland: Finnish Americans. See S 1335.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: United Nations. See S 2330.

Tuesdays

- 2300 KSDA, Guam: Music Scrapbook. See S 2300.
- 2300 Radio For Peace Int'l: UNESCO. See T 0130.
- 2310 Radio Finland: Press Review. See M 1140.
- 2315 KSDA, Guam: Bible in Living Sound. See S 2315.
- 2315 Radio Finland: Sports Fare. A feature on sports and off-hours activities.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: Headlines You May Have Missed or United Nations. The politics of Central America, or current-events programming produced by the UN.

Wednesdays

- 2300 KSDA, Guam: Music Scrapbook. See S 2300.
- 2300 Radio For Peace Int'l: World Peace And Responsibility. See M 0130.
- 2310 Radio Finland: Press Review. See M 1140.
- 2315 KSDA, Guam: Bible in Living Sound. See S 2315.
- 2315 Radio Finland: The Fourth Generation. See S 1335.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: United Nations. See S 2330.

Thursdays

- 2300 KSDA, Guam: Music Scrapbook. See S 2300.
- 2300 Radio For Peace Int'l: Amnesty International Reports or The Other Americas Radio. See S 0230.
- 2310 Radio Finland: Press Review. See M 1140.

- 2315 KSDA, Guam: Bible in Living Sound. See S 2315.
- 2315 Radio Finland: Names in the News. Interviews with Finnish news-makers.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: The Neumaier Report or United Nations. Life experiences and opportunities from a spiritual perspective.

Fridays

- 2300 KSDA, Guam: Music Scrapbook. See S 2300.
- 2300 Radio For Peace Int'l: Voices Of Our World. Interviews and reports about exotic corners of the world.
- 2310 Radio Finland: Press Review. See M 1140.
- 2315 KSDA, Guam: Bible in Living Sound. See S 2315.
- 2315 Radio Finland: Finnish History. A look back at historical events affecting Finland.
- 2330 KSDA, Guam: Voice of Prophecy. See S 0030.
- 2330 Radio For Peace Int'l: United Nations. See S 2330.

Saturdays


- 2300 KSDA, Guam: Micronesia Snapshots. See A 1600.
- 2300 Radio Finland: Perspectives. See S 0630.
- 2315 KSDA, Guam: Focus on Living. See A 0215.
- 2315 Radio Finland: Starting Finnish. See S 1315.
- 2330 KSDA, Guam: DX Asiawaves. See S 0230.
- 2330 Radio For Peace Int'l: The World In Review. See S 0530.
- 2345 KSDA, Guam: Probe. See S 0245.
- 2350 Radio For Peace Int'l: Undercurrents. See S 0550.



# Signal Intelligence: Products for Better Listening

*Convert Your Car Antenna  
Into a Scanner Antenna!*

## Mobile Antenna Multicoupler



Enjoy 30-960 MHz mobile scanner reception using your existing AM/FM auto antenna. No holes, no magnets, no scratched paint or clumsy cables going through doors and windows!

Takes only seconds to install and allows simultaneous use of your AM/FM car radio as well as your mobile scanner. Equipped with standard Motorola connectors for your car radio and most scanner models.

Order CPL-63

**Only \$24<sup>95</sup>**

\$2.00 UPS  
\$4 Canada



## REALISTIC PRO-2006

Wide Coverage Scanner



**SAVE 39<sup>05</sup>**  
Over 10% savings!

**Ideal for metropolitan listening** -- highest immunity to strong-signal overload of any scanner! Continuous frequency coverage 25-520 and 760-1300 MHz in AM, narrowband FM or wideband FM. Includes whip antenna, jacks for external antenna (BNC), headphone, external speaker, tape recorder, DC adaptor.

### Features include:

- Up-conversion (610 MHz) for best image rejection
- 400 memory channels in 10 banks
- Two-second scan delay; 26 ch/sec scan/search speed
- Individual channel lockout and delete
- Stores up to ten search ranges in memory; Priority on any channel
- Brilliantly backlit LCD shows frequency, channel and function
- Selectable search steps--5,12.5,50 kHz (30 kHz on cellular when restored)
- Zeromatic search stop for accurate frequency readout
- Dimmer for night viewing
- Sound squelch skips dead carriers
- Dual 120 VAC/12 VDC power supply
- Weight: 4-3/4 lbs.; Dimensions: 8-1/2"W x 3"H x 8"D

~~\$379~~ **NOW only \$339<sup>95</sup>**

**ORDER NOW!**  
Sale ends 9/30/91

Order SCN 6

Plus \$7.50 UPS/\$15 U.S. Parcel Post  
Canadians: \$20 Air. Parcel Post

## Extend the Reception Range of Your Handheld!

Replace that inefficient flex antenna with our universal 25-1300 MHz whip -- and stand back! Adjustable from 7 to 46 inches, the ANT-8 is made of chrome-plated brass and equipped with a standard BNC base to fit most amateur hand-helds and scanners. Transmits on 45-960 MHz.

Order ANT-8

**Only \$16<sup>95</sup>**

Plus \$3 UPS  
\$4 Canada

### DESKTOP UNITS

If your desktop scanner is equipped with a BNC antenna connector, try the new Grove ANT-8B with right-angle adaptor for improved low, high and UHF band reception when an outside antenna is not practical.

Order ANT-8B

**\$21<sup>95</sup>**

## Mobile Antenna

*Designed specifically for today's  
wide frequency coverage scanners!*

Utilizing Grove's exclusive multi-element construction, this sleek, black, 24" fiberglass whip, mounted on a strong, chrome-finished magnetic base, assures premium signal reception on 30-50 MHz low band, 118-136 MHz aircraft, 136-174 MHz high band, 225-400 MHz military aircraft, 406-512 MHz UHF land mobile and 806-960 MHz microwave mobile.

Tested to withstand at least 85 MPH road speed and equipped with 12 feet of coaxial cable with Motorola and BNC connectors.

ANT-4

**\$49<sup>95</sup>**

plus \$4 UPS

ANT-4W(whip only)

**\$24<sup>95</sup>**

plus \$2 UPS



# Order Today!

Grove Enterprises  
140 Dog Branch Road  
Brasstown, NC 28902

Call 1-704-837-9200 or for  
MC, Visa and COD orders  
only: 1-800-438-8155












# shortwave guide

## How to use the propagation charts

Propagation charts can be an invaluable aid to the DXer in determining which frequencies are likely to be open at a given time. To use the propagation charts, choose those for your location.

Then look for the one most closely describing the geographic location of the station you want to hear.

## Conditions for areas EAST of the Mississippi and ...

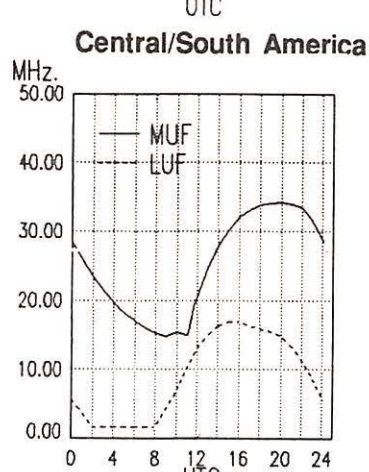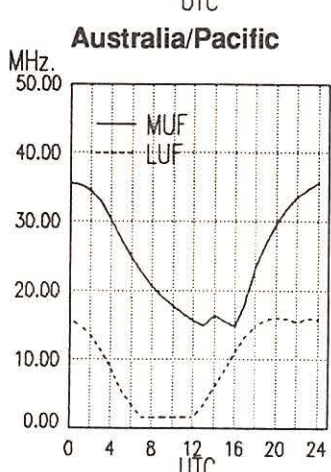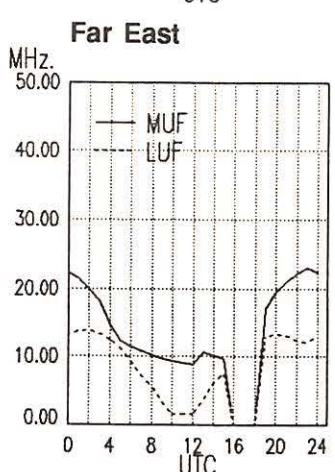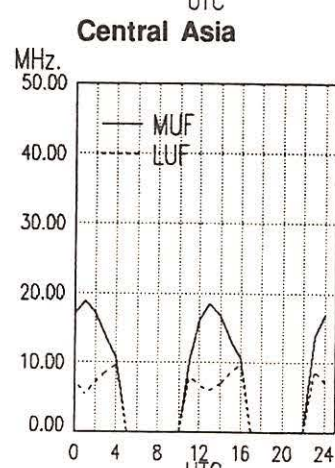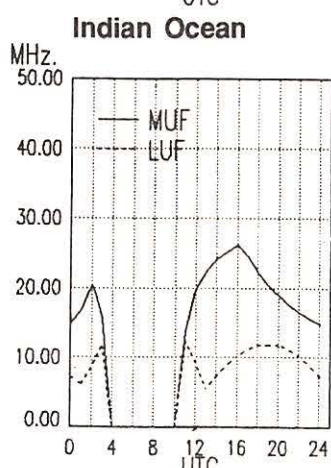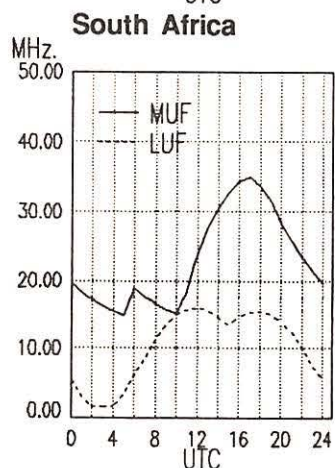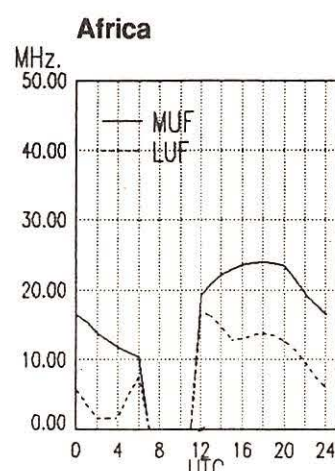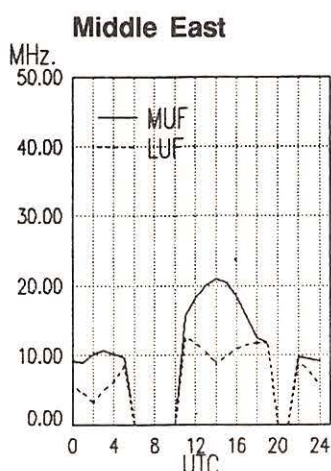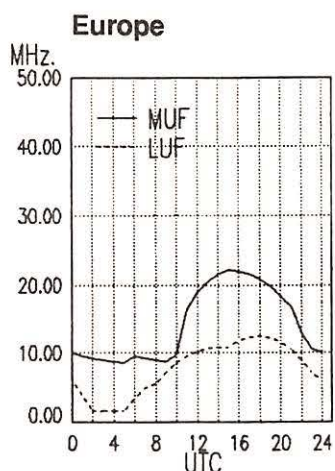












# shortwave guide

Once you've located the correct charts, look along the horizontal axis of the graph for the time that you are listening. The top line of the graph shows the Maximum Usable Frequency (MUF) and the lower line the Lowest Usable Frequency (LUF) as indicated on the vertical axis of the graph. The strongest signals will be near the MUF.

While there are exceptions to every rule (especially those regarding shortwave listening), you should find the charts helpful in determining the best times to listen for particular regions of the world. Good Luck!

## Conditions for areas WEST of the Mississippi and ...

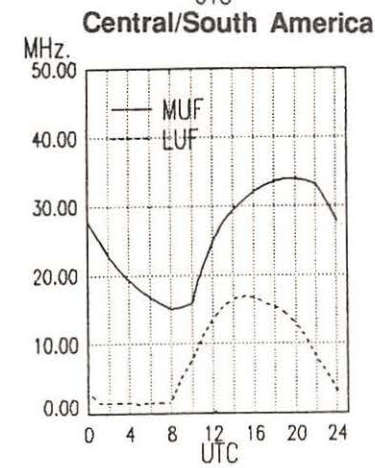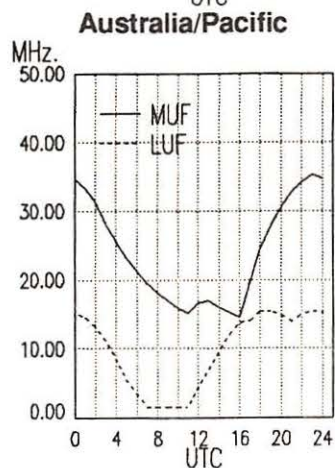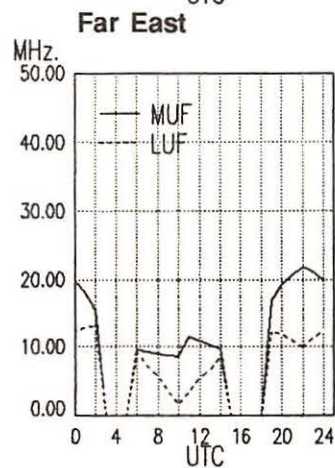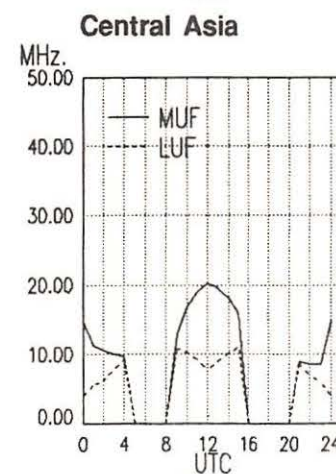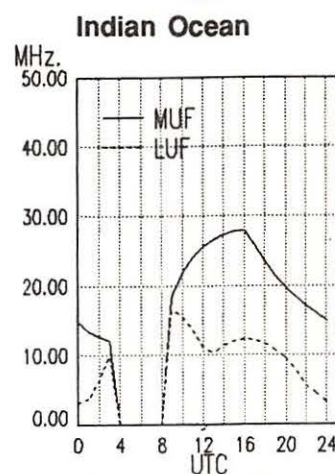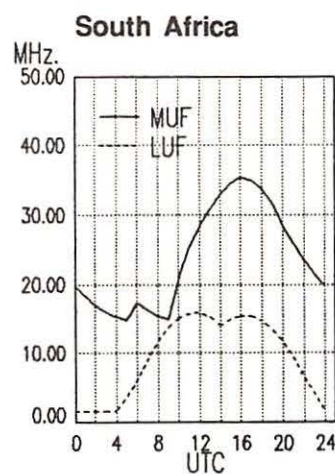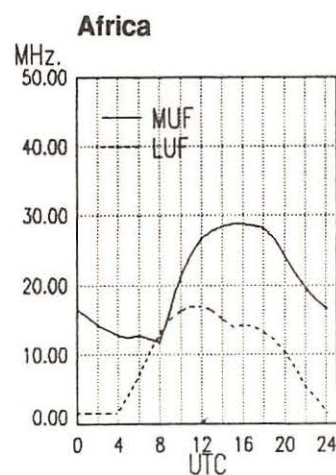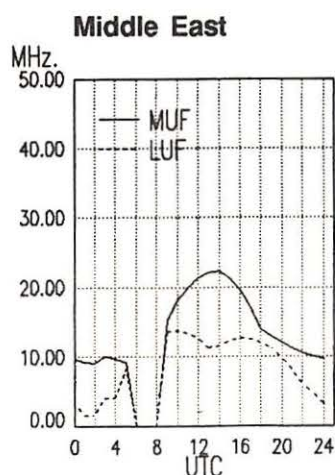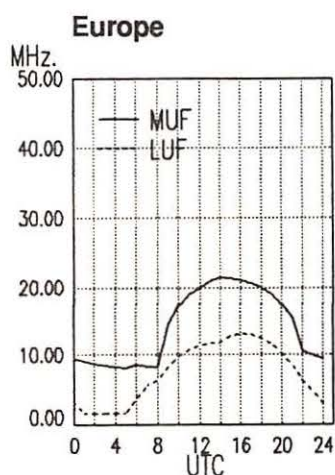



## Drake's New R8 Receiver: A Triumph!

If you've been into radio long enough to remember the R.L. Drake Company, consider yourself a seasoned veteran. From the late Fifties until the mid Eighties, they turned out some of the hottest listening rigs in the industry. Their stuff was first-rate, and relatively affordable considering their outstanding performance.

### Prior Receiver Was World's Best

Drake's last shortwave hurrah was with the R7, which with some changes was sold under other model designations, as well—chief among these being the professional-caliber R4245. In their day, these were the best shortwave DX receivers, period, eclipsing even Japan Radio and other leading lights.

In 1979, we purchased Drake's third R7 off the assembly line (they kept the first two for posterity), and after hooking it up to an antenna and dialing around came across what seemed like spurious signals, presumably being generated within the receiver. After all, these weren't coming in on our other receivers. We checked with others around the country having top-notch receiving posts, and none could hear these signals, either.

Was something wrong with the Drake? No. As we found out after much thorough investigation, these were spurious signals, all right—but they were being broadcast over the air! It was just that no other receivers were picking up these faintest of the airwaves' voices.

Not surprisingly, Drake did very well with the R7. Yet, they decided the amateur radio and shortwave listening markets were going nowhere, so they hitched their corporate star to satellite receiving systems. Now, years later, scrambling has caused that star to dim, and in the meantime world band listening on shortwave has mushroomed.

### R8: Same Approach, but More Advanced

Re-enter Drake with the \$979.00 model R8, introduced only a few months back. In many respects, it is reminiscent of the earlier R7, but in real dollars it's substantially less costly. It is also far easier and more sophisticated to tune, and sounds much better.



The R8 has loads of useful features: five (!) bandwidths, synchronous selectable sideband, passband offset, tunable notch filter, two VFOs, 100 presets, adjustable tuning steps, slow/fast/off AGC, preamplifier and attenuator, two antenna inputs, dual noise blankers, tone control, two 24-hour clocks, squelch and a timer. There are flip-down front feet to angle the cabinet upward, and the set is capable of receiving transmissions in AM, FM, CW, RTTY, LSB and USB.

There's a signal-strength meter and large LCD that displays much useful information. There are also six unmarked dual-function keys, buttons for synchronous detector and power, an LED to indicate when the synchronous detector is on, a headphone jack, concentric knobs for tone and notch, a keypad, two slewing buttons, the main tuning knob with fixed dimple, concentric knobs for squelch and passband offset, and yet another set of concentric knobs for volume and RF gain.

The R8's 100 presets store just about everything but the names of the announcers: frequency, mode, bandwidth, AGC setting, RF setting, antenna, notch on/off, noise blanker setting and synchronous detector on/off. They work well, too.

Frequency is normally displayed to the nearest kHz in the AM and FM modes, and to the nearest 10 Hz in all other modes. An option to have the AM mode read out to the nearest 10 Hz would have been helpful, although on our unit the frequency readout in the CW/LSB/USB modes is off between +30 and +80 Hz at zero beat.

The display also shows which preset is currently ready to be accessed, which VFO is in use,

which antenna is being used, the operating mode, the bandwidth in use; as well as the status of the noise blanker, notch, preamplifier, attenuator, scanning of presets and frequency lock. Tuning is in exacting 10 Hz increments.

### Peculiar Ergonomics

The display can be altered to read out to the nearest 100 Hz for AM, but this is not the default setting. If you change modes the readout reverts to 1 kHz resolution when you return to the AM mode. Too, the frequency readout has no decimal between kHz and 100 Hz.

Other ergonomic annoyances include that the chosen bandwidth reverts to default when the mode changes. When you turn on the receiver, each mode has its own default bandwidth setting—6 kHz for the AM mode, for example. If you change the bandwidth to 4 kHz, then switch into LSB, then return to AM, you'll find the bandwidth has gone back to 6 kHz, the default selection. Drake may be offering a software remedy shortly; check with them or your dealer for the latest update.

Bandwidth and mode choices operate on a carousel basis, which calls for lots of button pushing. And the filter and mode buttons are located so close to the tuning knob it is easy to hit the knob by accident.

There are two clocks, either of which can be seen with the radio off—but, alas, for only three seconds at a time when the radio is on. A plus for those chasing station IDs at the top of the hour is that both clocks display seconds numerically.



## Listening Quality Sets New Standard

So much for bells, whistles and ergonomics. When it comes to sheer performance, the R8 is just superb. Of its five bandwidths, four are for voice; these measure 6.3, 4.4, 2.6 and 2.0 kHz, with the fifth, for CW, being 0.5 kHz. These bandwidth choices are excellent, with worthy shape factors. No other receiver on the market today comes close to the R8 in terms of bandwidth flexibility.

Also aiding in optimum selectivity is the R8's passband offset. Passband offset allows you to tune away from adjacent-channel interference, and also acts as a tone control to supplement the receiver's regular tone control. The R8's passband offset works exceptionally well.

High among the R8's special goodies is its advanced-technology synchronous detector (which allows for selectable sideband) to reduce fading distortion. Sometimes it helps, sometimes it doesn't. But if you are responsive to distortion and like to listen to programs from major broadcasters, you will like it. It loses lock briefly every now and then—you'll hear a slight rumble—but quickly regains it. Of the various synchronous detectors we've tested over the years, only those of the Liniplex F2 receiver and the Sherwood SE-3 accessory work better.

That synchronous detector, the R8's low overall distortion and a host of other characteristics combine to make this receiver a treat for the ears. For any given signal, another model may sound better. But for the entire range of what world band has to offer, nothing else has the fidelity of the R8. When properly operated, it is a pleasure to listen to, hour after hour—especially when a quality external speaker is used. It's what world band listening should be, but until now wasn't.

Drake plans to introduce its own M8 accessory speaker about the time you read this. We haven't tested it, but have discussed it in some detail with Drake's engineering management. It looks promising, and probably will sell for under \$90.

Further aiding fidelity is that the R8 comes with a powerful tunable notch filter within its audio stage to eliminate heterodyne (whistle) interference. It is tricky to operate precisely because its excellent notch is so narrow and deep. Yet, once you've tuned it in it delivers a kayo punch.

## Superb DX Performance

Important for fidelity and DXing alike is that the R8 is relatively free from the hiss that mars reception on some other models. Its built-in preamplifier makes it even quieter. In other respects, too, our own ears and a wealth of labora-

Control	AR3000	R5000	TS Series	NRD525
Control off	Control off	Control off	Control off	Control off
JRC NRD-525	AM	✓AM	AM	✓AM
NRD-535	LSB	LSB	LSB	LSB
Kenwood	USB	USB	USB	USB
	Enter f	Antenna 1	RIT On	Narrow
		✓Antenna 2	RIT Off	Intermediate
		Auto Info	Up	Wide
		Enter f	Down	Auxiliary
			Clear	✓Fast
			Auto Info	Slow
			Enter f	Off
				Enter f

**SHORTWAVE NAVIGATOR**  
puts all of these Macintosh menus on your screen for \$69!  
scan or click to tune  
custom program search  
reports  
memory tracking  
frequency finder  
(Copilot/Autopilot for  
Kenwood Users: add \$30)

**Custom 6 ft. Cables:**  
• Mac to Kenwood/AR (mini-8 to DB-25)—\$20  
• Mac to NRD-525 (mini-8 to JRC 12-pin)—\$35

**DX Computing**  
232 Squaw Creek Rd, Willow Park,  
TX 76087 — (817) 441-9188



## RADIO C. CRANE CO.

1-800-522-TUNE (8863) Orders

Canada only 1-800-521-TUNE

WATSON LANE, FORTUNA, CA 95540

(707) 725-5940

**SELECT-A-TENNA** - Doubles the normal listening range of any AM(BCB) station!  
**AUTO ANTENNA** - Easily installed, almost doubles AM reception, no FM degrade.  
**SANGEAN** - The ATS-803A is rated the best shortwave radio for the money.

**GRUNDIG Satellit 500** - The most selective portable.

**McKAY DYMEK** - World's best active SW antenna, US made - \$208.99

**UNIDEN SCANNERS** - Decent price plus custom guaranteed modifications.

**AMPLIFIED SPEAKERS(2)** - Transforms any earphone jack to high quality sound.  
Great for FM stereo!

**KOSS HEADPHONES** - Simply the best, lifetime guarantee (\$5 each repair).

**CHANNEL MASTER FM ANTENNA** - Most powerful FM antenna 12'6" L x 6' W.

**SHORTWAVE ANTENNA PAMPHLET** - 6 plans for the "non-rocket scientist" \$3.00.

- Please write for free catalog. Our prices are the lowest in the nation when you consider our high level of service.

- All prices include shipping and handling - 30 day satisfaction all products.

- Information, experience, and service to help you decide which are best.

**Barker Williamson/Eavesdropper/Proton/Books/Custom Adaptors & Cable**

tory measurements show that the R8 performs right up there with the best models for DXing. This is a receiver that's remarkably consistent in the high quality of its performance—unlike models that excel in some respects, but fall down in others. Too, the slow/fast AGC can be switched off for listening to weak tropical-band signals that would otherwise be lost in static.

Nevertheless, the ergonomic imperfections of the R8, of relatively minor import for program listening, are clearly apparent during serious DX bandscanning. It's one of the most annoying models we have tested in this regard—its superb performance notwithstanding. Some DXers won't mind, but most other DXers probably will.

## 15-Day Free Trial Period

Drake will sell the R8 directly (800/937-2538), or it is available from radio dealers, including Grove Enterprises. Both Grove and

Drake have a 15-day "test drive." Try it for a couple of weeks and if you don't think it's with the kilobuck, send it back for a refund.

## The Bottom Line

Overall, the Drake R8 is simply the best radio we have ever tested for quality listening to programs. It's also right up there with the best for DXing—ergonomic oddities aside. There's nothing else quite like it.



PASSPORT'S "RDI White Paper" equipment reports contain virtually everything found during IBS' exhaustive tests of premium receivers and antennas. These reports are available in the U.S. from Universal Shortwave, EEB and DX Radio Supply; in Canada from PIF, C.P. 232, L.d.R., Laval PQ H7N 4Z9; in Europe from Interbooks, 8 Abbot Street, Perth PH2 0EB, Scotland; in the U.K. from Lowe Electronics stores; and in Japan from IBS-Japan, 5-31-6 Tamanawa, Kamakura 247. For a complete list, send a self-addressed stamped envelope to RDI White Papers, Box 300M, Penn's Park PA 18943 USA.



## Shinwa SR001 Scanner

While the name "Shinwa" is rarely seen on consumer electronics, the Japanese company does have an excellent reputation for communications equipment. They are presently testing the European and American domestic market with an impressive, if pricey, scanner.

The SR001 is quite compact, about the size of a mobile CB set (7"W x 2"H x 6"D). Because of this small size, the remarkable number of features must be selected and set by a hand-held infrared remote control unit.

The remote control is intended to provide armchair operation at home or in the office, but no AC adaptor is supplied (\$21.50 option), nor is an attachable whip provided (we would recommend the Grove ANT-8B telescoping whip, \$21.95). A DC cord for attachment to the vehicle's 12 volt system is included. Current drain is approximately 1.5 amps.

It is possible to press the radio's front-panel keys to choose typical routine functions like memory banks, scan, and up and down increment keys; rotary controls allow adjustment of comfortable squelch and volume levels.

The squelch and volume knobs can be conveniently pressed into the panel where they remain recessed to prevent accidental damage until they are pressed once again for release.

The fluorescent panel is quite busy, with the frequency displayed in white, and status callouts in green. Two antenna jacks—a BNC and an N—allow the user to choose separate antennas for different frequency ranges, or use the same antenna for the entire receive spectrum.

The frequency range of the 001 is a commendable, no-gap, 25 to 999.995 MHz. Scan speed is an impressive 25 channels per second, and search speed is an even more impressive 35 channels per second.

Up to 200 memory channels may be banked in ten 20-channel sets. The scan function may be programmed for memory channels, banks or bands.

Scan-resume delay may be programmed from 0 to 16 seconds (the manual says 3). A priority function is reserved for channel 000 (the channels are numbered 000-199).

### Specifications

Reception modes may be selected on any frequency or memory channel for AM, wide FM or narrow FM. Tuning steps may be chosen as 5, 10, 12.5, 30, 25, 50 or 100 kHz.

The basic circuit design is a triple-conversion superheterodyne with a first IF at 999.5 MHz, a second IF at 45 MHz and a third IF of either 10.7 MHz (FM wide) or 455 kHz (FM narrow and AM).

The audio amplifier is capable of delivering in excess of 1 watt to the internal speaker or an external 8-ohm speaker. An earphone jack is also provided separate from the speaker jack.

### Let's Try it Out

When we unpacked the 001 we were impressed by its heftiness; housed in a diecast frame, the little scanner weighs a substantial three pounds.

After we connected the DC power leads to the screws on a 12-volt bench power supply, we tried unsuccessfully to get the radio to switch on by pressing the volume control. It was then that we discovered that it simply rotated on and off, and the push feature was to protect the control by recessing it into the panel! This feature is not mentioned in the manual. The squelch knob, incidentally, functions the same way.

The scanner is both easy and difficult to operate. While control function selection is very straightforward, it is not familiar and takes some getting used to.

There are no less than 26 buttons, jacks and controls on the basic radio, 36 keys on the remote control, and 25 separate callouts and number clusters on the display panel!

The unit generates considerable heat over a period of time, but this is normal; it is readily dissipated by the heavy-duty case.

While an RS232 connector is provided on the rear apron, there is no documentation nor an interface available at this time.

Sensitivity is excellent, typically 0.5 microvolts. More important, the dynamic range is better than the big-name competition; overload and intermod are much less in dense-signal environments, even with an outside antenna. A small light-bar display registers relative signal strengths.

Audio quality is adequate for voice reception and loud enough for most vehicular applications, although the top-mounted speaker may encounter muffling when the scanner is mounted typically under the dash.

The 001 comes from the factory with pre-programmed mode and step defaults depending upon the particular frequency range brought up. It would appear from the selections that it must have been designed for the European bandplan. The user will need to defeat the presets manually on most bands.

The search modes may be selected from either the normal upper/lower limit ranges, or direct—you enter any frequency and step up or down from there as far as you wish. Up to ten search ranges may be combined.



An interesting variant on priority is the alarm mode. When selected, a loud beeping and a flashing display will alert the user to the presence of a signal on any channel for which alarm was assigned. It is deactivated by pressing any key.

For some reason, Shinwa has elected to use several non-standard terms for standard functions. Lockout is called "skip," search is "band scan," delay selection is "timer," and banks are called "groups."

Borrowed from consumer audio is a mute function which allows the receiver audio to be quieted at the press of a button without turning the volume control.

The receiver may also be turned on and off from the remote control just so long as power is supplied to the radio. This means that a standard bench-type power supply with its own switch must be left on for this remote function, or both radio and power supply must be turned on and off.

While the squelch control may be adjusted in normal fashion, Shinwa has also provided a manual override button which allows weak signals to be heard which wouldn't ordinarily break the squelch threshold setting.

The instruction manual is very useful, but incomplete. The owner should plan on using the manual as an introductory guide with some errors, then experimenting with the radio itself for full utility.

### The Bottom Line

The Shinwa SR001 is a well designed, functional scanner with many features—perhaps too many features. Most users are likely to feel intimidated when they first try accessing its many capabilities. But with patience—and a little time—the scanner becomes as easy to use as a home VCR. And it works very well.



*The Shinwa SR001 available for \$479 plus \$7.50 shipping, including one-year warranty, from Grove Enterprises, PO Box 98, Brasstown, NC 28902; credit card orders call toll-free 800-438-8155.*





"The Largest Dealer of Scanners in the World"

# SCANNER WORLD, USA®

10 New Scotland Ave., Albany, NY 12208 • 518/436-9606

## SCANNER WORLD EXCLUSIVE UNIDEN BEARCAT BC205XLT

**\$259.99** (\$7.00 shipping)

Digital programmable 200 channel hand held scanner with raised button keyboard for easy programming of the following frequency ranges: 29-54 MHz, 118-174 MHz, 406-512 MHz, 806-956 MHz. Features include: Scan delay, memory backup, key pad lock, sidetalk liquid crystal display, channel lockout, 10 twenty channel banks, direct channel access, automatic search, full one year factory warranty, 10 priority channels, Ni-Cad battery pack, AC adapter/charger, flexible rubber antenna carry case are all included. Size is 2-11/16" W x 1-3/8" D x 7-1/2" H. (Optional extended 2 yr. warranty \$29.99, 3 yr. extended warranty \$39.99.)

(\* Excludes Cellular)  
#CC-008 Heavy Duty Leather Carry Case \$27.99

## RADIO SCANNERS AND ACCESSORIES

Bearcat BC145XL	\$99.99	(7.00)
Bearcat BC140	94.99	(7.00)
Bearcat BC172XL	139.99	(7.00)
Bearcat BC55XLT	119.99	(7.00)
Bearcat BC800XLT	249.99	(7.00)
Bearcat BC100XLT	189.99	(7.00)
Bearcat BP205/200	34.99	(*)
Bearcat BC210XLT	189.99	(7.00)
Bearcat BC-ONE	129.99	(7.00)
Bearcat AD-100U	14.99	(*)
Bearcat PS-001	12.99	(*)
Bearcat VC-001	12.99	(*)
Bearcat AD-140U	14.99	(*)
Bearcat AT-054	12.99	(*)
President HR2600	219.99	(8.00)
Regency R3020	96.99	(7.00)
Bearcat BC-310A	85.99	(7.00)
Bearcat BC-330A	109.99	(7.00)
Regency MA-917	24.99	(*)
Regency MA-501	14.99	(*)
LifeGard 4	109.99	(4.00)
GRE9001	89.99	(5.00)
GRE8002	79.99	(4.00)
Midland CB Radios	In Stock	
Cobra CB Radios	In Stock	
Uniden CB Radios	In Stock	
Silver Eagle Microphone	69.99	(*)
Antennas	In Stock	
Rechargeable Batteries	In Stock	

## BOOKS

Covert Intelligence	8.95	(*)
Air Scan Directory	14.99	(*)
Betty Bearcat (Special)	4.00	(*)
Top Secret (7th)	15.99	(*)
Covert Techniques	9.95	(*)
Tomcat's Big CB	13.95	(*)
World Radio	18.99	(*)
Monitor America	5.99	(*)
Survival Directory	6.95	(*)
Rail Scan	7.95	(*)
Police Call	7.49	(*)
Scanner Modification Handbook	17.99	(*)

## TWO-WAY RADIOS REGENCY-RELM

UC102	109.99	(6.00)
UC102	(2 or more) 99.99	(6.00)
RH-256NB	339.99	(9.00)
RH-606B	469.99	(9.00)
WHS-1	399.99	(9.00)
UC-202	134.99	(6.00)

## REGENCY TS-1 35 CHANNELS — MOBILE/BASE

Special

**\$138.99** (\$7.00 shipping)

Features include simple programming of the following frequency ranges: 29-54 MHz, 118-175 MHz, 406-512 MHz. Turboscan, digital display, priority, search, lockout, delay, dim control, top mounted speaker, one year factory warranty. Includes AC & DC cords, mobile mounting bracket, telescopic antenna. All for only \$138.99 plus \$7.00 shipping. (Optional extended warranty; 3 years \$39.99; 2 years \$29.99.)

## UNIDEN BEARCAT BC-400XLT

**\$99.99**



(\$7.00 shipping)

Our best selling mobile scanner, 16 channel, AC/DC, programmable, digital, AC/DC cords, telescopic antenna, mobile mounting bracket, weather search, priority, 29.54 MHz, 136-174 MHz, 406-512 MHz, external speaker and antenna jack.

## REGENCY R-4020

100 Channel Digital  
Programmable  
Hand-Held Scanner

**\$174.99**

(\$7.00 shipping)

Our best price ever on a full featured complete package hand-held scanner. Manufactured by Uniden, this is the exact duplicate of the Bearcat 100XLT for a much lower price. Features include 11 bands of weather, aircraft, public service, trains, marine, plus more (29-54 MHz, 118-174 MHz, 406-512 MHz), 10 channel banks, 10 priority channels, lighted LCD display, earphone jack, channel lockout, AC/DC operation, scans 15 channels per second, track tuning. Special package deal includes following accessories: AC adapter/charger, rechargeable Ni-Cad battery pack, flexible rubber antenna, carry case.

## SANGEAN ATS-803A

SHORT WAVE  
RECEIVER

**\$168.99**

(\$7.00 shipping)



AM/FM/LW and 12 shortwave bands plus FM stereo, BFO for SSB reception, clock radio. Includes AC adapter, telescopic antenna, stereo headphones, and shoulder strap.

—SHORT WAVE WORLD BAND RECEIVERS AVAILABLE—

Grundig Satellit 500	\$548.99	(10.00)
Grundig Yacht Boy 220	106.99	(5.00)
Grundig Cosmopolit	198.99	(7.00)
Grundig Yacht Boy 230	149.99	(5.00)
Grundig Satellit 650	899.99	(20.00)
World Radio & TV Handbook (1991)	18.99	(*)

## SPECIAL!!

LOWEST PRICE EVER FOR A  
PROGRAMMABLE SCANNER

Cobra

SR-901

AVAILABLE ONLY  
FROM SCANNER  
WORLD



ONLY! **\$74.99** Each


(Plus \$6.00 Shipping Each)

**\$69.99** (2 or more)

Features include: 10 programmable channels, one touch memory programming, external speaker jack, 29-54 MHz, 136-174 MHz, 400-512 MHz, squelch, lockout, full frequency digital readout, AC or DC operation, retains memory up to 3 days without power, scan button. Includes AC adapter, telescopic antenna, and complete operating instructions. Size: 7 1/4" W x 2" H x 7 1/4" D. One year factory warranty. (Optional mobile cigarette lighter cord #901MPC \$4.99)

## Regency R3020

**\$96.99** (\$7.00 Shipping)



20 channel digital programmable scanner, frequency coverage 29-54 MHz, 108-136 MHz aircraft, 136-174 MHz, 406-512 MHz. Features: weather key, search, lockout, priority, squelch, AC only, delay button. Size 9 1/2" x 2 3/4" x 7".

## UNIDEN BEARCAT BC-600XLT

**\$199.99**

(\$7.00 shipping)



Digitable Programmable  
100 Channel Scanner  
BC 600XLT covers the following frequencies: 29-54 MHz, 118-174 MHz, 406-512 MHz. Features compact size of 6-5/16" W x 1-5/8" H x 7-3/8" D, scan delay, priority, memory backup, channel lockout, bank scanning, key lock, AC/DC power cords, telescopic antenna, mounting bracket supplied, one year factory warranty, search, direct channel access, track tuning, service search including preprogrammed frequencies by pushing a single button for police fire/emergency, aircraft, weather, and marine services plus exclusive optional features never available on any scanner before. First is an RF receive amplifier for boosting weak signals for only \$24.99 plus a CTCSS tone board is available for only \$59.99 to make this the number one scanner available in the USA. Optional cigarette lighter plug #600MPC \$4.99.

## BEARCAT BC-950XLT

Same features as BC-600XLT but also receives 800-954 MHz. (Excludes cellular)

**\$249.99** (\$7.00 shipping)

## REGENCY R-4010 \$106.99

(\$7.00 shipping each)

10 channel hand-held scanner. (Same Scanner as Bearcat 55XLT), 29-54 MHz, 136-174 MHz, 406-512 MHz, digital programmable, keyboard lock switch, lockout, includes rubber flex antenna. (Optional accessory SW-41, only \$19.99 includes rechargeable Ni-Cad batteries, AC adapter/charger and cigarette lighter cord.)



★ SCANNER WORLD HAS BEEN  
SELLING SCANNERS FOR  
OVER 21 YEARS

★ ALL MERCHANDISE NEW, IN  
FACTORY SEALED CARTONS

★ COMPLETE CATALOG  
PUBLISHED 4 TIMES PER  
YEAR. FREE UPON REQUEST.

## BEARCAT 70XLT 20 CHANNEL DIGITAL HAND-HELD SCANNER

**\$129.99**

SPECIAL  
PACKAGE DEAL  
ONLY (\$7.00 Shipping)

Small size 6" H x 1" D x 2 3/4" W. Full digital readout, priority, search, channel lockout, scan delay, key lock. Covers following frequencies: 29-54 MHz, 136-174 MHz, 406-512 MHz. Package includes rubber antenna, rechargeable Ni-Cad battery pack, AC adapter/charger and vinyl carry-case.

Optional Cigarette Lighter  
Cord #UA502..... **\$12.99**  
Heavy-Duty Leather Carry  
Case #CC002..... **\$22.99**

## BEARCAT BC-147XLT 16 CHANNEL BASE SCANNER

**\$99.99**

(\$7.00 Shipping)

Programmable, digital, AC/DC operation. Frequency coverage 29-54 MHz, 136-174 MHz, 406-512 MHz. Weather button, priority, lockout button, squelch includes AC adapter, telescopic antenna.

## REGENCY R-2066 \$99.99

(\$7.00 shipping)

Digital programmable, 60 channels, AC base scanner, 30-50 MHz, 144-174 MHz, 406-512 MHz. Size 7 1/2" x 3" x 9". Turbo-Scan scans 40 channels per second, 4 channel banks, weather alert, search, priority, lockout, AC cord, telescopic antenna, plus much more.

## EXTENDED WARRANTY SERVICE

This extended service contract is for all scanners, CB radios, radar detectors, and cordless telephones that have been purchased anywhere in the USA in the past 30 days. This extended warranty service begins when your original manufacturer's warranty expires.

1 year extended warranty ..... only \$18.99  
2 year extended warranty ..... only \$29.99  
3 year extended warranty ..... only \$39.99

**ORDERING INFORMATION:** Call (518) 436-9606 to place orders or mail orders to Scanner World, USA®, 10 New Scotland Ave., Albany, N.Y. 12208. Orders will be shipped within 24 hours by United Parcel Service if order is accompanied by MasterCard, Visa, cashier's check, money order, COD (COD shipped by United Parcel Service will be cash or money order only). (If a COD package is refused, customer will be billed for shipping and COD charges.) Mail orders with personal or business checks enclosed will be held 4 weeks for bank clearance. Prices, specifications, and terms subject to change without prior notice. If items are out of stock we will backorder and notify you of delivery date. All shipments are F.O.B. Scanner World® warehouse in Albany, N.Y. We are not responsible for typographical errors. All merchandise carries full manufacturer's warranty. Bid proposals and purchase orders accepted from government agencies only. Free full line catalog mailed 4 times per year. Merchandise delivered in New York State add 7% sales tax. No returns accepted after 7 days of merchandise receipt. \* Add (\$5) per item, and \$3.00\* for all accessories ordered at same time. COD orders will be charged an additional \$4.00 per package. Full insurance is included in shipping charges. All orders are shipped by United Parcel Service to street address only. (No P.O. Box). Shipping charges are for continental USA only. All others ask for quote on shipping charge.

Scanner World, USA® • 10 New Scotland Ave., Albany, NY 12208 • 518/436-9606



## Baluns —

### Do We Need Them?

Anyone who has worked with antennas has heard the term "balun" or "balun transformer." But, few users of this interesting device have a full understanding of how and when to use a balun. Under a given set of conditions, this item can be a remedy for a problem, or it can worsen an existing malady.

The term "balun" means, literally, "balanced to unbalanced." For example, a balanced antenna such as a dipole or loop, may be fed with an unbalanced feed line (coaxial cable) by means of a balun transformer.

The addition of a balun at the antenna feed point helps prevent the feed line from radiating or picking up signals. This preserves the normal pattern of the antenna (prevents pattern distortion because of feeder effects).

### The Nature of Baluns

The correct pronunciation for this device is "bal-un." It is commonly mispronounced as, for example, "bal-oon" or "baylon."

What is a balun, electrically speaking? It is a broadband (untuned) transformer. A broadband transformer, when used in a proper electrical environment, can operate from, say, 1.8 to 40 or 50 MHz with minimal signal loss. It is important to understand, however, that any transformer will introduce some loss. A well designed and applied balun should introduce no more than 1 dB of loss.

Baluns are used also for transforming one impedance to another. The most common balun transformation ratios are 1:1 and 4:1. An example of where we might use a 4:1 balun is to match the balanced 300-ohm impedance of a folded dipole to a 75-ohm coaxial feed line. In a like manner, we can match a 200-ohm balanced antenna to a 50-ohm coax line by means of a 4:1 balun.

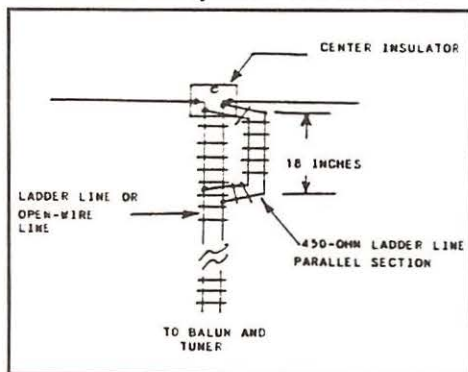


Figure 2 -- Open-wire or ladder-line feeders tend to break at the antenna center insulator. The line can be strengthened by placing a short length of 450-ohm ladder line in parallel with the main feed line, as shown. The new line section is taped to the primary feeder at four points. See text for data on a new type of ladder line that is more rugged than conventional ladder lines.

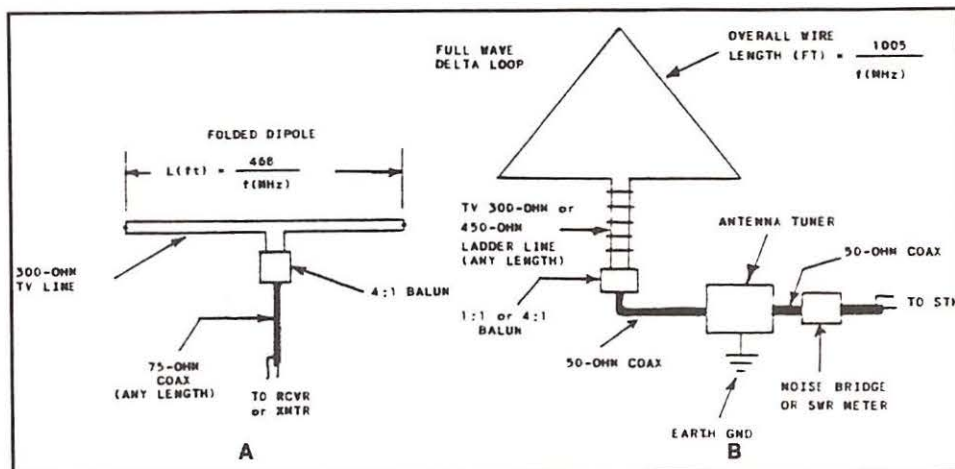


Figure 1 -- Examples of how a balun is used to (A) convert a 300-ohm folded dipole for use with 75-ohm coaxial feed line. This is a single-band antenna as shown. Diagram B shows a multiband Delta Loop that is fed with TV ribbon or 450-ohm ladder line and tuned for an SWR of 1 by means of an antenna tuner. A noise bridge or SWR meter is used to indicate when the SWR is 1:1. The balun may be located just outside the radio-room window to avoid a need to route the feeders through the wall of a house.

A 1:1 balun, on the other hand, can be used to feed a balanced 50-ohm antenna with an unbalanced 50-ohm feeder.

### Some Balun Pitfalls

Most baluns are wound on magnetic cores such as powdered iron or ferrite. This provides a lot of necessary inductance (for the low-frequency range of the balun) with a minimum number of turns of wire. It also helps to reduce losses while minimizing the unwanted effects of inductive and capacitive reactance. Such reactances can impair the balun performance at the high end of the transformer operating range.

Attention must be paid to the core type and size when a balun is used with a transmitter. Too small a core can saturate in the presence of RF power. Saturation causes core heating or damage. The permeability of the core (ferrite) will change when saturation occurs, and it may not return to its original value after the core cools down.

Baluns and other types of broadband transformers are intended for low impedance levels - typically from about 10 ohms to perhaps 600 ohms. A balun that joins a 50-ohm line to a high impedance load, such as a 1,000-ohm antenna, is apt to arc between the winding and the core, and it may saturate.

Furthermore, the transformer may no longer be capable of ensuring the proper phase relationship when it is used in so hostile an environment. Huge cores and extensive high-voltage insulation are sometimes used to allow safe operation of a balun in a high-impedance-load situation, but I don't recommend you do this.

A balun can disrupt the antenna standing-wave ratio (SWR) in some systems. This is caused by (1) poor balun design (unwanted reactances) and (2) by virtue of the lead length from the balun to the antenna feed point. These leads become part of the antenna and this can change the antenna resonance (lower it). This is a problem especially at the upper end of the HF spectrum.

There are two excellent books which cover the theory and design of broadband, magnetic-core transformers and baluns.<sup>1</sup> I recommend these books for those of you who wish to build your own baluns.

### Examples of Balun Use

Figure 1 shows examples of how you might employ a balun for a multiband HF antenna. Open-wire or "ladder line" feeders are specified to minimize transmission-line losses. The baluns convert the balanced antenna feed point to an unbalanced condition which permits the use of coaxial cable. An antenna tuner or transmatch is used at the station end of the line to provide a 50-ohm match to the receiver and transmitter. This provides a 1:1 SWR for the equipment. Maximum power transfer always occurs when two unlike impedances are matched.

Some manufactured HF Yagi beam antennas call for a coil of coaxial cable at the antenna feed point (8 or 10 turns of RG-8 with a 6- or 8-inch coil ID). This device should not be confused with a balun. It is actually a choke that presents a 50-ohm input and output impedance. This choke prevents RF energy from appearing on the shield



braid of the overall coaxial feed line. In effect, it isolates the feeder from the antenna in a manner that is similar to that of a balun.

## Problems with Ladder Line

Antennas that are fed with open-wire or molded ladder line are prone to failure over time because of the feed line moving to and fro in the wind at the antenna feed point. Most ladder lines contain no. 18 Copperweld wire. This conductor becomes brittle from stress and breaks at the feed point.

Figure 2 shows a cure I developed for this problem. It involves placing a 2-foot section of ladder line in parallel with the main feeder at the antenna feed point. This strengthens the feeder at the critical point and greatly minimizes wind stress. W4THU, who operates The Radio Works, is now offering an excellent 450-ohm ladder line that contains 19-strand, NO. 16 copper-clad conductor. This line is able to withstand considerable flexing and stress without breaking. The larger conductor size helps minimize feed-line losses.<sup>2</sup> W4THU also sells a line of excellent baluns that have large cores and will handle up to 2 kW of RF power.


I am using one of The Radio Works B4-2KX remote 4:1 baluns just outside my radio room. It is connected between 100 feet of 450-ohm ladder line and a 10-foot run of RG-8 coax cable that is attached to my antenna tuner. The balun runs cool at maximum amateur power. The antenna is a full-wave 160-meter loop that I use from 1.8 to 29 MHz.

## Do You Need a Balun?

Baluns are not beneficial with HF-band dipoles that are less than 1/2 wavelength above ground. Low-height dipoles and other antennas generally exhibit a high radiation-angle pattern that is essentially omnidirectional. Any pattern distortion caused by the feedline will never be noticed. Conversely, a dipole that is 1/2 wavelength or greater above ground exhibits the classic figure-8 pattern, and a balun can help to preserve this pattern.

Baluns are helpful in assuring an impedance match for certain antennas. They are beneficial also for interfacing a balanced antenna to an unbalanced feed line. Many commercially-made antenna tuners, matchers or transmatchers contain a 4:1 balun. This permits us to use an antenna with balanced feeders for multiband purposes.

In any event, the balun needs to be protected from dirt and moisture to prevent it from arcing when RF power is supplied to it. Coax Seal, a commercial putty-like product, is excellent for protecting the balun from moisture and air pollution at the points where the coax connector is mounted and where the terminals or wires for the balanced antenna are situated.



## Forbidden Technologies

The Spook Book deals head on with Electronic Surveillance, Countermeasures, Lock Picking, Rearming Hand Grenades, Amateur Rocket Weapons and much more. Favorably reviewed. 258 pages, 8.5x11, soft bound..... \$34.95 postage paid

## Surveillance Audio Amplifiers

SAA is a Surveillance Specialist cookbook. Covering any and all subjects concerning Audio Surveillance with no exceptions. From wiretapping to audio filtering, this is a must have publication. 277 pages, 8.5x11, soft bound..... \$34.95 postage paid



## Now Hear This!

### Electronic Eavesdropping Equipment Design

Full of detailed professional quality schematics and plans for all types of Electronic Surveillance Equipment. Excellent book! 110 pages, 8.5x11, soft.....\$34.95 postage paid



## The Cuckoo's Egg

### Tracking a Spy Through the Maze of Computer Espionage

A true story you won't be able to stop reading. #1 "Best Seller" 325 pages, 6.5x9.5, hard bound..... \$24.95 postage paid



## Perstor Systems.....High Capacity Hard Drive Controllers

Perstor Systems line of high capacity hard drive controllers allow you to increase the capacity of any MFM hard drive by 90%. A Seagate ST-4096 (80 meg.) drive will format to 146 megs. Installation available...No one beats our price. CALL TODAY!

Factory Distributors of:

- \* Cap-Stun, non-lethal weapons \* Israeli Gas Masks \* Z-Tool, lockout tools
  - \* Forbidden Technology publications \* Surveillance Electronics
  - \* Countermeasures Electronics \* Perstor Systems, hard drive controllers
- Licensed and Certified Counterintelligence Technicians on Staff

**Send \$3.00 for Catalog** (Refundable with order)

## Advanced Electronic Technologies

Suite 173, 5800-A No. Sharon Amity Rd., Charlotte, NC 28215

Order Toll Free 1-800-543-5207 Info/Tech (704)545-2681

FAX (704)545-9061 Computer BBS (704)545-7076

Coax Seal is useful also as a covering for the electrical connections where the feeder or balun attaches to the antenna. This prevents oxidation and subsequent resistive antenna joints.

Home-made baluns are described in *The ARRL Handbook* and *The ARRL Antenna Book*. Suitable core material may be purchased from Amidon Associates, Inc., P.O. Box 956, Torrance, Calif. 90508.

A final word: Baluns do not cure TVI.



### References

- 1 D. DeMaw, *Ferromagnetic Core Design & Application Handbook*, Prentice-Hall, Inc., Englewood Cliffs, N.J. 07632.
- J. Seveck, *Transmission Line Transformers*, 2nd edition, The ARRL, Inc., Newington, Conn. 06111.
- 2 The Radio Works, Box 6159, Portsmouth, Va. 23703. Large catalog available.



## Build an Electromagnetic Field Meter for Next to Nothing

There has been a flurry of electromagnetic field and Gauss meter projects around the hobby technical scene for some time. *MT* reviewed one such meter in the April 1991 issue.

A number of scientific studies suggest that health risks can be associated with long term exposure to VLF electromagnetic fields, especially the kind that comes from 60 Hz AC-power transmission lines, consumer appliances and electronic apparatus.

The jury is still out on the judgement of this possibility and is likely to remain out for some time to come, but many people are now building or buying equipment to measure the strength of AC fields. Forewarned is forearmed, eh?

**Problem:** the current crop of home-brew EM field meters are fairly sophisticated, moderately difficult to build, and somewhat pricey. Commercial EMF/Gauss meters are out of the hobbyist price range altogether.

**Cheers:** Thanks to a resourceful *MT* reader, there is now an economical and practical way to get a good idea of the relative strength of electromagnetic fields in your home, office, shop and neighborhood.

P.A. Jensen of Thousand Oaks, California, called our attention to a simple modification to convert a Realistic (Radio Shack) sound level meter, #33-2050, into a sensitive EM field meter. When I read Mr. Jensen's letter, I thought there had to be more to it than just replacing the built-in microphone element with a telephone pickup coil. But then curiosity got the better of me. I tried it and sure enough, it works, just as Mr. Jensen said it would.

To do the job up right, you'll need two components from Radio Shack besides the sound level meter: a telephone pickup coil, RS #44-533, and a closed circuit one-eighth inch phone jack, RS #274-248. The jack allows the sound level meter to be used for its intended purpose when not in use as an EM field meter.

Plug the telephone pickup coil into the jack and voila: an instant EM field meter. Remove the coil plug and you're back to the sound level meter. It's that simple, and installation is a snap.

Remove the back cover of the sound level meter. There's one visible case screw on the back near the microphone head and another just inside the battery compartment. After removing the two screws, work the back cover off starting at the mike end. Drill a hole and install the jack on the rear plastic case as shown in Figure 1. Wire the jack as shown in Figure 2. Six solder connections later and one cut circuit trace will put you in

business with a useful electromagnetic field detector.

Operation is easy. Plug the telephone pickup coil into the new jack or a coil wound to your own specs. Select the C-Weighting and Slow Response functions. Rotate the dial of the sound level/EM field meter through its seven positions while holding the pickup coil near or on the electromagnetic source of interest.

Start with things that are known to emit EM fields such as AC motors (drills, sanders, etc) or household appliances (toasters, electric ranges, etc). You'll soon get a feel for how to set the meter for a good measurement. The 120 dB position is the least sensitive while the 60 dB position is the most sensitive.

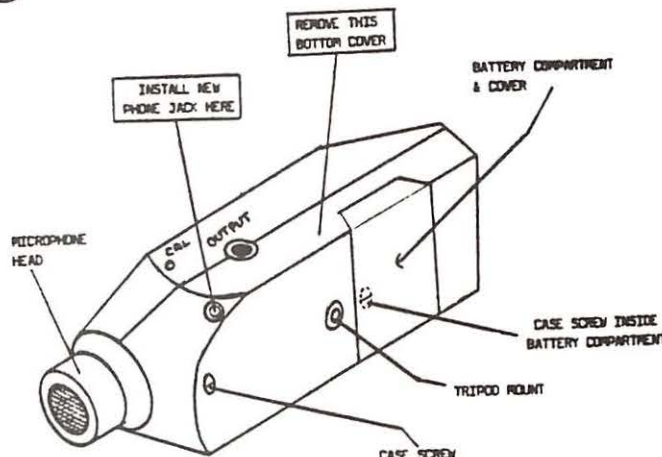


Figure 1: EM Field Meter - External Installation

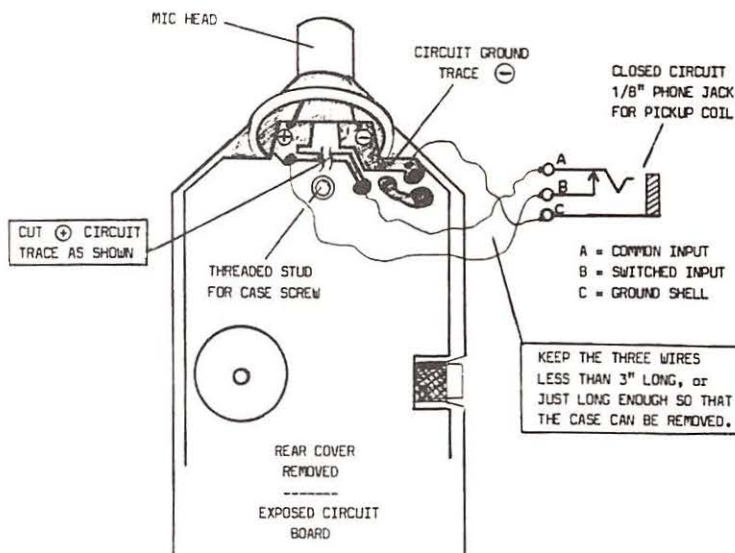


Figure 2: EM Field Meter - Wiring & Hookup Diagram

### Analyzing the Output

I don't know how to calibrate or literally interpret measurements with the EM field meter, but since 60 Hz signals are within the unit's 32 Hz-10 kHz (C-weight) specification, it's a fair assumption measurements can be interpreted directly in decibels on a relative basis.

It's also a fair assumption that a VLF electromagnetic field which produces a 0-dB reading in the 120 dB position on the sound meter is relatively just as powerful as a sound wave that produces the same reading. A sound wave at that level could blow your eardrums. One can only wonder about the biological effects of an EM field at that intensity.

Most EM fields will be considerably weaker than that. One area of my computer produced a measurement of 106 dB. A toaster yielded 70 dB; an electric blanket, 80 dB; and an electric drill



produced an astounding 124 dB when the pickup coil was held close to the case.

The microphone automatically disconnects as the telephone pickup coil plugs into the jack, so there is no way the meter can pick up sound when in the EM field mode. Therefore, the meter will offer a frank indication of the relative strength of alternating VLF electromagnetic fields of the kind that are causing concern among medical and science professionals. For under \$40 you will be able to identify strong and weak, intermittent and continuous sources of EM fields in and around your domain.

After the health effects of EM fields have been determined, you just might be able to take immediate, decisive remedial action. At the very least, this project will result in a nice dual-purpose test instrument for your technical arsenal. And you'll be able to measure sound levels from the teenager's "boom box" next door, too.

## CTCSS Revisited

Most scanners and other communication receivers have an audio frequency limit purposely designed to match the bandwidth of human speech, which is about 300 Hz to 3000 Hz. You may have noted in July's table of EIA CTCSS tones that all CTCSS frequencies are well below 300 Hz.

This means that it will not be possible to hear the CTCSS tones which accompany VHF and UHF transmissions through your receiver's speaker. In cases where the receiver has extended bass response, a low level "hum" might be heard along with the voices. If you can detect that hum, it's a sure sign that CTCSS is in use.

If you can't hear the CTCSS tones from the speaker of your scanner or receiver—and chances are that you will not—it might be possible to detect them by connecting the receiver's Tape Record Out jack to a high fidelity (stereo) amplifier with wider audio response.

The reason this may work is because the audio response at the output of your receiver's discriminator circuit can be rather wide—20 Hz-15 kHz or so. The 300-3000 Hz bandwidth of the receiver's audio section is developed in the preamplifier stages by bandpass filters. The Tape Rec Out signal is usually a very low level signal that is tapped near the discriminator, so CTCSS tones might not be filtered out at that point.

You could connect a quality cassette recorder to the Tape Out jack on your scanner, record some business and public safety signals, then play the tape back through your stereo system and see if you can hear different hums or tones along with the signals—an interesting little side project to whet your appetite for further exploits in the world of CTCSS.

That's the mix for this month; let me know what, how much and how deep you want to get in future issues. I'm game for 'most anything.



## FCC NO-CODE

### AMATEUR RADIO LICENSE

The FCC recently passed Docket 90-55 which for the first time allows a new codeless entry ham radio license of technician grade. Privileges 30 MHz and above - ALL modes! (Send SASE for copy of R.E. article)

One ham magazine covers ALL the specialty modes! Feature Writer's and regular Column Editors help you along, educating and updating you on what's happening "on-the-bands". Start your subscription today & join in on the fun!

*FSTV SSTV FAX RTTY PACKET  
AMTOR OSCAR FM REPEATERS  
MICROWAVE AND LOTS MORE!*

SEND  
\$20  
CHECK  
OR  
MONEY  
ORDER



OUR  
24TH  
YEAR  
SINCE  
1967!

The SPEC-COM Journal  
P.O. Box 1002,  
Dubuque, IA 52004  
(319) 557-8791



MC/VISA (5% added)



## DIRECTORY OF MILITARY AVIATION COMMUNICATIONS (VHF/UHF)

EUROPE, NORTH AFRICA,  
MIDDLE EAST

6,000 New Listings

\$19.95 plus overseas airmail

HUNTERDON AERO PUBLISHERS  
P.O. Box 754, Flemington, NJ 08822 USA  
Credit Card Orders: 1-800-542-SCAN.  
Send for our free catalog.

## PC Software by W2XQ

We'll be at the MT Convention  
in Knoxville! Will you?

Come see our IBM PC software at  
booth #25, next to JRC. Or send SASE  
for catalog or download info from  
Pinelands RBBS 609-859-1910.

## TRS Consultants

PO Box 2275-MT  
Vincentown, NJ 08088-2275  
609-859-2447 | Fax 609-859-3226


## RF SIGNAL DISTRIBUTION

### Multiple signal monitoring in the .1 to 1000 MHz range

Increase your S/N before  
receivers using WI-COMM low  
noise (NF3dB) multicouplers  
RC06 with better linearity  
RC24 with better noise figure

Having (paging) interference  
problems while monitoring  
your scanner frequencies?  
Then consider WI-COMM super  
linear (IP55dBm) multicouplers  
CRC11 for 30 to 500 MHz  
CRC43 for 30 to 900 MHz

- 115/230VAC power supply
- 4-32 outputs to receivers
- Rx-Rx isolation 20 dB
- Fixed gain 3-12 dB
- 19" rack mounted enclosure
- BNC/TNC/N/SMA connectors



WI-COMM ELECTRONICS INC.  
P.O. Box 5174, Massena, NY 13662  
Ph. (315) 769-8334

## AMIGA + ICOM R7000

The Ultimate Scanning Combination. !!!  
Finally the power of the Amiga can control the ICOM R7000.  
\* The ONLY scanner control system that directly generates SPEECH!  
\* The Amiga can say the frequency, time and even the users comment!  
\* The Amiga also directly controls the tape recorder, by channel!  
Imagine the possibilities, after an automated logging session a  
tape may be played back with hit activity (no dead time) and  
accompanying time and/or frequency information. All hit activity  
will be shown in high resolution graphics and may be saved to disk  
Each individual channel (up to 1024 per file) may control:  
Lockout (skip channel), Mode (AM / FM / FMN / SSB), Say the  
frequency, Say the time, Say the users comment, (up to 80  
characters long per channel), and / or record the hit on a tape recorder.  
Scans over 1300 channels per minute on any Amiga.  
Global controls can also enable / disable the speech and record functions.  
User or auto scaled high resolution graphs display current activity and log.  
Extremely powerful scan delays. May scan by comment. Does NOT need  
Joystick speech board or ICOM CI-V interface, no radio modifications required.  
Fully mouse driven, menus, icons, built in editor etc. Range scan, Autoscan  
mode may generate scan files with date and time log. ASCII file format. Fully  
multitasking. Requires 1 MByte ram. WB2.0 compatible. Many more features.

Includes custom hardware interface, SCAN7000 software,  
example scan files, owners manual and U.S. shipping.

\$149 (VISA / M-C / check / money order)

R71A Future Scanning Systems.  
Coming! 406 N. Delaware  
Dewey OK 74029  
tel. (918)-534-3210

demo disk, example scan files and manual \$15 (refundable)

## DX Helper

Macintosh Software W7H

MUF Map • MUF Plot  
Gray Line • Great Circle  
Prefix, Zone, Oblast  
WWW Alert • CW Drill

\$39.95 Info  
ppd \$1

AntennasWest

Box 50062-M, Provo, UT 84606

(801) 373-8425 See band openings on the map before they happen!





## Beaming In

As you may know, beam antennas have an advantage over nondirectional antennas in both transmitting and receiving. So, if you are an SWL, a monitoring buff, or an amateur radio operator, this month's antenna should be of interest to you.

The beam antenna has been around for a long time, and has a reputation for usefulness in DX work due to its concentration of radiation at low angles. It also has nulls in its response which reduce noise and interference which come in from the "side" of the pattern, as shown in Figure 1C and 1D. This reduction of interference can be a great boon to weak signal reception, and is perhaps the most impressive feature of this antenna.

### Let's Make One

These directions are for antennas to be used at frequencies near 15 MHz or higher. For frequencies significantly lower than this, you may want to devise other means of mounting the vertical elements. Use of wire in place of tubing for the vertical elements is okay.

1. Take two one foot lengths of three-quarter inch plastic PVC water pipe and saw a three inch slot in one end of each pipe as shown in the inset in Figure 1B.

2. Take two 10 foot lengths of one-half inch metal electrical conduit tubing or some other light metal tube that will fit snugly inside the plastic pipe, and slip the end of this tubing down four inches inside each plastic pipe on its slotted end.

The metal tube used here must be the correct length (L from Figure 1). For extending a tube a short distance you can clamp a piece of stiff wire or rod with hose clamps to the upper end of the tube to obtain the correct length. Don't omit guy ropes if they appear necessary, because if you leave an antenna put up in a flimsy manner, it may buckle and fall.

3. Put a hose clamp over the slotted end of the plastic pipe and clamp the slotted end tight to the metal tube inside.

4. To make the groundplane radials for one of the vertical elements, cut a one-half wavelength length of wire. This will be twice the length of L in Figure 1, as the ground plane

for each vertical element is one wire made two quarter wavelengths long. You may use any reasonable kind of wire here.

5. At the center of the length of the one-half wavelength piece of radial wire, remove any insulation. Then use a hose clamp to attach this wire to the plastic pipe. The bare center of the wire should be beneath the clamp as shown in Figure 1B. Position the clamp so that it is about one-half inch below where the metal pipe ends inside the plastic pipe and tighten lightly. You will attach the coax shield to the radial under this clamp soon.

6. For each element take two one-half inch long self-tapping metal screws and drill some appropriately sized holes through the plastic pipe and on into the metal pipe near its bottom end. The screws put in these holes will be the electrical connection from the inner metal tubing inside the plastic pipe on out to the center conductor of the coax feedline (see Figure 1B).


7. Prepare one end of the coaxial feed line so that you have four inches of the outer conductor braid separated from the cable. Loosen the radial clamp on one pipe tube set and wrap

this braid around the bare groundplane wire at its center. Retighten the clamp so that the braid and groundplane wire make good electrical contact with each other under the clamp.

8. Strip the insulation from about three inches of the center conductor of the coax and wrap the end of the center conductor of the coaxial feed line under the self-tapping screws that attach to the inner tube as shown in the inset of Figure 1B and tighten the screws. Washers put on the screws on each side of the wire help here.

9. Repeat steps 8 and 9 for the other pipe-tube set and attach it to the other end of the coaxial feed line. Seal the coax ends with coax sealer to keep moisture out.

10. Select a location where you can point the beam in your most desired reception directions as shown in Figures 1C and 1D as explained in step 14 below. Put the pipe-tube sets in position by bolting or clamping the lower portion of the plastic pipe to tall posts or other supports. Unless the elements seem very strong, you will probably need to guy them. For taller antennas that seem more likely to bend, a set of guys at the mid-section and another set at the

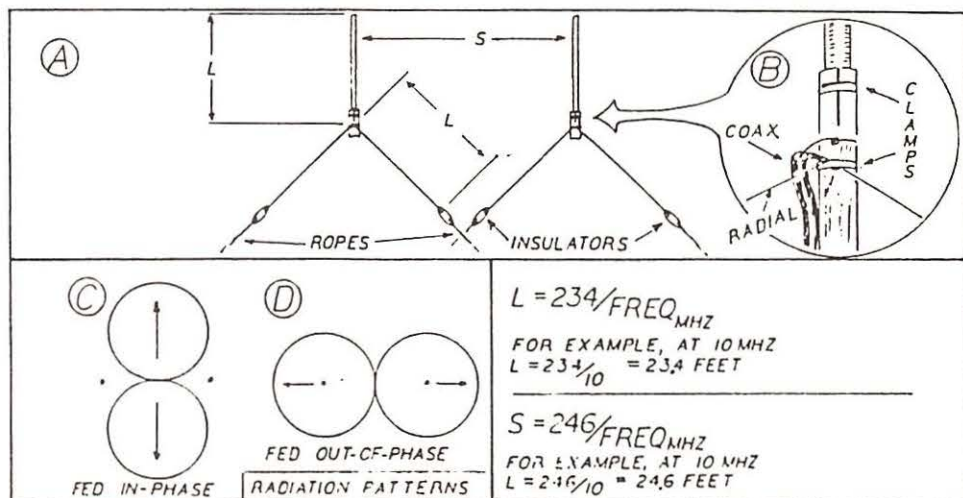

**Figure 1:** A phased array beam antenna (A), detail of feed (B), radiation patterns (C,D), and length formulas.





# Austin Antenna

"The World Leader in Multiband Technology"



Manufacturers of multi-band Land Mobile, Microwave, and Scanner Antennas for Government Agency operations, Drug and Law Enforcement operations, Communications at the Kennedy Space Center and major networks such as NBC and ESPN.



The Ultimate  
Omnidirectional  
Multiband Station Antenna



New Innovation brings  
New Dimensions for Portables !



Superb Performance !  
with Maximum Versatility for  
Mobile and Base Station



Send \$1.00 for an Austin Scanner Antenna User's Guide [a regular \$3.95 value]

Austin Antenna 10 Main Street, Gonic, N.H. 03839 (603) 335-6339

top of the vertical elements are separated by a distance equal to  $S$  from Figure 1A. Tie the ends of the groundplane wire so that they droop from horizontal, as shown in Figure 1A.

11. For your feedline, use a piece of coax which is twice as long as is necessary to run to your operating position. Mark the exact middle of the coax feed line and put the midpoint at your operating position by the receiver.

12. Cut the feedline at its middle, and also at a distance one-quarter wavelength on one side of the middle. The one-quarter wavelength in coax is computed by the formula  $L(\text{in feet}) = (246/\text{freq in MHz}) \times VF$ , where  $VF = .66$  for coax with polyethylene insulation, and  $VF = .80$  for coax with foam insulators.

Put coax male connectors on each of the four ends thus created. Then connect these ends to coax T-connectors.

13. Make a length of coax long enough to run from either of the T-connectors to your

receiver. Put the appropriate male coax connectors on this cable and attach this coax between one of the T-connectors and your receiver.

14. To steer the antenna's beam from one of its radiation patterns to the other, change the cable connected to the receiver from one T-connector to the other. When the lead-in is on the T-connector at the center of the coax feedline, the pattern is directed perpendicular to the plane of the two elements (Figure 1C). When the lead-in to the receiver is attached to the T-connector which is off to one side of center the pattern's directivity is in the plane of the elements (Figure 1D).

15. Keep the antenna well away from high voltage lines. If you live in lightning country, don't forget lightning protection. As always, the minimum is to never operate the antenna during stormy weather, and to ground it when it is not in use.

## RADIO RIDDLES

### Last month:

You were asked to tell, in simple terms, what is the relationship between a longwire antenna, a V-antenna, and a rhombic antenna? Well, the V-antenna was designed by combining two long-wire antennas in a V shape so that the radiation patterns combine to give a bi-directional beam pattern.

Then, to make a good thing better, the rhombic was designed by connecting two Vs "mouth-to-mouth" so to speak, in a diamond or rhombic shape, resulting in an even higher gain and sharper beam pattern. So, the longwire V antenna is essentially two longwire antennas, and a rhombic is essentially four longwires.

### This month:

What is a passive repeater, what is passive about it, and what does it repeat?

Find an answer to this month's riddle, and much more, in next month's *Monitoring Times*. Till then, Peace, DX and 73.





**Q.** I tried monitoring the Space Shuttle in April, 1991, on the well-known UHF frequencies (259.7 and 296.8 MHz AM) but heard nothing. Do I need to listen on HF SSB? (Mike Munson, Placerville, CA)

**A.** The April flight was military, and UHF is avoided for security reasons on DOD missions. Even with scientific payloads, orbital UHF is minimal, although it is always used at liftoff and touchdown.

On HF be sure to listen to W3NAN, the Goddard Space Flight Center amateur radio club, which rebroadcasts shuttle communications on 3860, 7185, 14295 and 21395 kHz SSB.

NASA and USAF HF support frequencies are listed in the new 1991 edition of the *Shortwave Directory* (\$21.95 plus \$3.50 UPS shipping from Grove Enterprises, PO Box 98, Brasstown, NC 28902; also available from Grove dealers).

**Q.** Why do international broadcasters and even radio manuals refer to meters rather than frequency? (Paul Siegmann, Marshfield, WI)

**A.** As the song goes, "tradition"! Early this century when precise frequency measurement wasn't possible, radio waves were measured by their actual free-space length by cumbersome devices like Lecher wires. It was then that terms like "longwave" and "shortwave" were born.

It was also during that period that the radio bands were first allocated; thus, the 49 meter band for broadcasting, the 80 meter band for hams, and so forth.

The system is still widely used in Europe, but since wavelength may change with its environment, the old system has been virtually abandoned in the United States in favor of frequency.

**Q.** I have an old copy of the Police Call scanner directory. Do frequencies change enough to warrant its replacement? (Bill Silvey, Shelby, NC)

**A.** The denser the population, the more changes there are in licensees. The FCC estimates approximately 10% changes per year in their frequency database.

**Q.** Recently, while searching the 860-865 MHz range on my Radio Shack scanner, I heard cellular phone calls, probably from the cell site about 4 miles away. Isn't the cellular band 869-894 MHz? (Pete Dulac, St. Mary's, GA)

**A.** Sure is. There is no such thing as a "perfect" scanner, and oscillator products (harmonics and spurious signals—"spurs" or "birdies") can cause false responses to signals, especially when they are strong.

Even the strong signals themselves can overpower scanner circuitry, resulting in the internal generation of false signals (intermodulation products—"intermod").

**Q.** After purchasing a cordless phone, I discovered a "birdie" on

39.18 MHz, our local sheriff's frequency. Is there anything I can do to eliminate the problem? (Beth Wollard, Hagerstown, MD)

**A.** Cordless telephones are notorious for their oscillators being picked up by scanners, some worse than others. Fortunately, there are ten channel pairs available, and all you need to do is exchange the phone for another unit whose oscillator is on a different frequency.

**Q.** I own a classic 1948 fire truck with the original spring-base whip which bumps into everything. Can I use a smaller whip? (Harvey Eckart, Berwick, PA)

**A.** In that era, low band was common for public safety communications. If you wish to preserve the integrity of the vehicle, you could always move the whip to a lower point on the truck, assuming that you don't actually use it for radio since the lower point would reduce range.

If you must leave the mount at its present position, how about cutting off the excess length? If you want to use the whip for communications, you could substitute a shorter, helically-wound fiberglass whip for low band, or a full-length 18" whip for high band (less base spring which adds too much length at high VHF).

**Q.** Where can I find beginner's type information on shortwave listening? (Jalma Baker, Tallahassee, FL)

**A.** There are several good books available from MT advertisers like DX Radio Supply, Universal Shortwave, Grove Enterprises and EEB. My own *Scanner and Shortwave Answerbook* is one of them; Harry Helms' *Shortwave Listening Guidebook* is another. And, of course, MT provides monthly information on all aspects of monitoring the spectrum.

**Q.** How does a station "beam" its signal to a particular point? (Paul Siegmann, Marshfield, WI)


**A.** Just as a TV antenna is capable of focusing a signal it receives, the function is reciprocal: energy fed to that antenna from a transmitter would also be focused outward. The lengths of the elements and their relative spacing are critical; they must be calculated for specific frequencies.

### Bob's Tip of the Month

#### Simple Antenna Switching for Receivers

The following scheme allows two single pole, double throw switches to select either of two antennas for either of two receivers. Virtually any kind of switch will work below 30 MHz, but for scanners, coax cable must be used with connector-equipped switches like those used for video games or VCRs.

When the first switch is up, it is connected to the receiver on the right; when the second switch is up, it is connected to the receiver on the left. Switching both down reverses the antennas with the receivers.

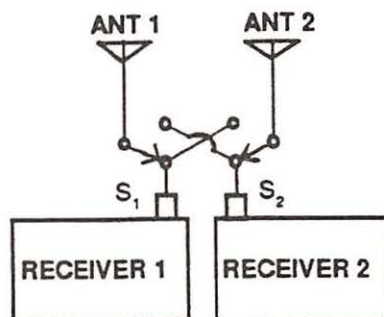



Questions or tips sent to "Ask Bob," c/o MT, are printed in this column as space permits. If you desire a prompt personal reply, mail your questions along with a self-addressed stamped envelope (no telephone calls, please) in care of MT.

At any specific frequency, a long element will reflect the signal while a shorter one will concentrate the signal; thus, a short (director) element is placed in front of the active (driven) element to which the feedline is connected, while a longer (reflector) element is placed behind. This is the basis of the classical Yagi "beam" antenna.

**Q.** Recently I saw a radio called a "Thompson Neutrodyne"; it had five dials marked "Amplifier", "1st Radio", "2nd Radio", "Detector", "Detector". It also had a plug marked "Detector". Is this a rare radio? (Joseph Balitza, Jr., RR#2 Box 90-1, Palmerton, PA 18071).

**A.** I find no such listings in my antique radio indexes. Can any of our readers help Joseph?

**Q.** My scanner presently goes no higher than 512 MHz. Can it be modified to receive the 800 MHz cellular frequencies? (numerous)

**A.** No. Scanners that have no 800 MHz band coverage lack any components which allow 800 MHz capability; to hear that frequency range on such a scanner, an external converter is necessary.

**Q.** My Bearcat 20/20 and 170 scanners search and store frequencies in 12.5 kHz increments; is there any way to modify it to 5 kHz increments? (Bill Plante, Windham, ME)

**A.** No. Uniden (and previous Electra) Bearcat scanner microprocessors are unalterably programmed for specific functions; frequency spacing is one of those functions.

mt

## GALAXY ELECTRONICS

67 EBER AVE. BOX-1202


AKRON, OHIO-44309

216-376-2402

NEW



NEW



### AR-1000★

AR-1000

1000ch, covers 8-600 & 805-1,300 MHz, 10 Search Banks, LCD Display, Priority, AC/DC, Complete with all Accessories

369

AR-2500

2016ch, covers 1-1,500 MHz, LCD Display, Search, Delay, Priority, AC/DC, Complete with all Accessories



469

BC200XLT

200 Channels, 12 band with aircraft & 800 MHz, 10 priority channels, channel lockout, scan delay, automatic search, illuminated LCD display, snap-on battery pack, programmable, track tuning, direct channel access, with AC adapter, leather carry case & earphone

249

279



BC760XLT 100 channel 12 band base/mobile scanner with 800 MHz band & Service Scan Weather, Priority, Lockout, Scan delay, Search, Programmable, Track tuning Direct ch access

REGENCY

### SHORTWAVE RADIO

KENWOOD

R-5000 100kHz-30mhz Digital 100 Memories \$849.00

R-2000 150kHz-30mhz Digital 10 Memories \$649.00

SONY-2010 150kHz-30mhz 76-108 118-136mhz \$359.00

SONY-2003 150kHz-30mhz Scanning Memories \$259.00

ICOM R-71A 100kHz-30mhz 32 Memories \$849.00

ICOM R-7000 25-2 000mhz 100 Memories \$1049.00

ICOM R-9000 100kHz-2 000mhz 1000 Memories \$4795.00

NRD-525 0.9-34mhz 200 Memories Digital \$1159.00

FRG-9600 60-905mhz Continuous 100 Memories \$559.00

FRG-8800 150kHz-30mhz Memories Scans \$679.00

GRUNDIG-500 1-6-30mhz Memories Scans \$499.00

KENWOOD RZ-1 1mhz-905mhz Continuous 100 Memory \$499.00

SANGEAN ATS-808 45 Memories LCD Display More! \$219.00

### POLICE/FIRE SCANNERS

BEARCAT

BC-200XLT 200ch 29-54 118-174 406-512 806-952

BC-760XLT 100ch 29-54 118-174 406-512 806-952

BC-600XLT 100ch 29-54 118-174 406-512 Service Search \$229.00

BC-100XLT 100ch 29-54 118-174 406-512 Handheld \$209.00

BC-800XLT 400ch 29-54 118-174 406-512 806-912 \$269.00

BC-210XLT 40ch 29-54 118-174 406-512mhz \$219.00

REGENCY

TS-2 75ch 29-54 118-174 406-512 806-952 \$299.00

TS-1 35ch 29-54 118-174 406-512 Turbo Scan \$199.00

INF-2 50ch Pre-Programmed For All 50 States \$189.00

INF-5 Pre-Programmed AC Only Digital \$99.00

R-2060 60ch 29-54 136-174 406-512mhz \$129.00

USED  
GEAR

28 PAGE 1991 PICTURE CATALOG \$1.00

AIR/POLICE/800 MHz

BUY  
SELL  
TRADE

**SAME DAY C.O.D. SHIPPING**  
**FREE SHIPPING & INSURANCE!!!**  
**WE TAKE TRADES!!!**

### The Clandestine File

A complete collection of The Clandestine Confidential Newsletter. Over 100 pages of frequencies, schedules, addresses and other info on these back alley political broadcasters.

\$25 + \$2 s/h (\$3 foreign)

**Uno, Dos, Cuatro**  
**A Guide to the Numbers Stations**  
by Havana Moon.

All about the mystery spy/numbers broadcasts. Includes an extensive list of times and frequencies.

\$13.95 + \$2 s/h (\$3 foreign)

**The Pirate Radio Directory**  
by George Zeller.

Authoritative survey of No. American pirates on shortwave. Formats, frequencies, times, IDs, DJ names, addresses, QSL info.

\$8.95 + \$2 s/h (\$3 foreign)

Order now from your radio book dealer or

**Tiara Publications**

PO Box 493M, Lake Geneva WI 53147

Catalog \$1, free with order. Visa/MasterCard



# LETTERS

continued from page 3

Florida is not noted for a friendly attitude toward portable scanners. Says Mark, "Although I am an off-duty officer, I was advised it would be best not to bring along an off-duty weapon or scanner; I agreed to leave the gun home, but most folks know me better than to think I'd leave home without my scanner ...."

"Why don't scanners have S-meters?" was a question raised in July's edition of "Ask Bob." Bob Grove answered that the manufacturers have never been receptive to the idea; Gene Hughes of *Police Call* wrote us to say his experience with Radio Shack agreed with the cold shoulder Bob received from Electra, Bearcat's previous manufacturer.

Says Hughes, "Bob Katz, Radio Shack buyer of scanners, told me they wouldn't do it because it would raise the price of the units. Period!"

Manuel Schneider of Bellevue, Washington, takes exception to the statement, pointing out that both the AOR AR-2500 and AR-3000 have S meters, "plus a lot of advanced features not found in Uniden and Radio Shack scanners."

He further wonders why "Scanner Equipment" has never bench tested the AR2500, and why ACE Communications, North American distributor of the AOR receivers which advertises extensively in other magazines, only runs a small, outdated ad in *MT*.

We're with you, Manuel; we'd like to know, too! Beth Leinbach, our advertising agent, has several times contacted Ace about replacing their ad. Meanwhile, as one Grove customer commented, the \$499 price on the AR1000 in the ad certainly makes the Grove \$399 price look like a whopper of a discount!

*MT* also sent several requests for an AR2500 test unit, but none was forthcoming. Reports soon began coming in, however, that the receiver was plagued with problems.

Is the new SINCGARS (Single Channel Ground and Airborne Radio System) secure or is it not? wonders Harry Church of Lebanon, IL. The same military receiver is pictured in two different shots in July's article on battlefield communications, but the captions imply two different conclusions.

Harry, I believe that one of the main points Jack Sullivan made in his article was that even when encryption systems were available to Desert Storm personnel, they were not always used; that's why so much was heard in the clear.

By the way, Rex Whetzel of Wolcottville, Indiana, wrote his Congressman about the sad state of military communications equipment, and

received a reply from Colonel John Back. Colonel Back sent an update on the current state of production of SINCGARS radios, saying "Fielding of SINCGARS to the active Army and round-out reserve force will be completed by 1998." He indicated that funding, not manufacturing, was the main holdup.

A reader who wishes to remain anonymous objected to the assertion in both the Battlefield Communications article and in Federal File that reconnaissance missions intentionally violate Soviet airspace. One of the purposes of such flights, according to both articles, is to accumulate information on the Soviets by triggering radar systems and causing them to scramble their aircraft in pursuit.

Our writer says, "International airspace exists to just outside 12 miles of the Soviet coastline and this is more than close enough to accomplish the intended mission. 50 miles is usually sufficient and provides a margin for safety."

He also supplies a mystery for readers flying into Las Vegas to puzzle over:

"A secret government airline operates five unmarked red and white Boeing 737's from a small terminal on the west side of McCarran Int'l Airport in Las Vegas. The aircraft use the callsign 'Janet' followed by three digits, and come and go all day long. The parking lot holds over 1,000 cars and has two guarded entrances bearing no identification except generic 'authorized personnel only' signs."

The accompanying chart shows the airport

with the facility drawn in. OK, readers, you have your assignment. And good luck.

## Hit or Miss:


We owe an apology to Everett Slosman, author of last month's article on the Woods Hole Search and Rescue; it was incorrectly attributed on the Contents page to the author of July's excellent piece on hamfests.

Eric Walton (P.O. Box 346 Station A, Vancouver, BC, Canada V6C 2M7) would like to correspond with other subscribers who use the Sangean 803A receiver regarding their experiences and accessory equipment. Eric is retired and says he's been "active more or less in SWling for around 30 odd years."

Debra Emrle of Springfield, MO, saw an ad for computer software for language translations. Wonders Debra, "Would this be useful for reception reports for QSLs?"

Although there are books and articles on QSLing which no doubt provide some preworded QSLs in other languages, why not word your own and then translate it? Sounds good to me, Debra. How about it, readers? Does anyone have experience with this? Recommendations and prices for software?

Robert Thomas of Bridgeport, CT, heard Ian McFarland's prerecorded congratulations to

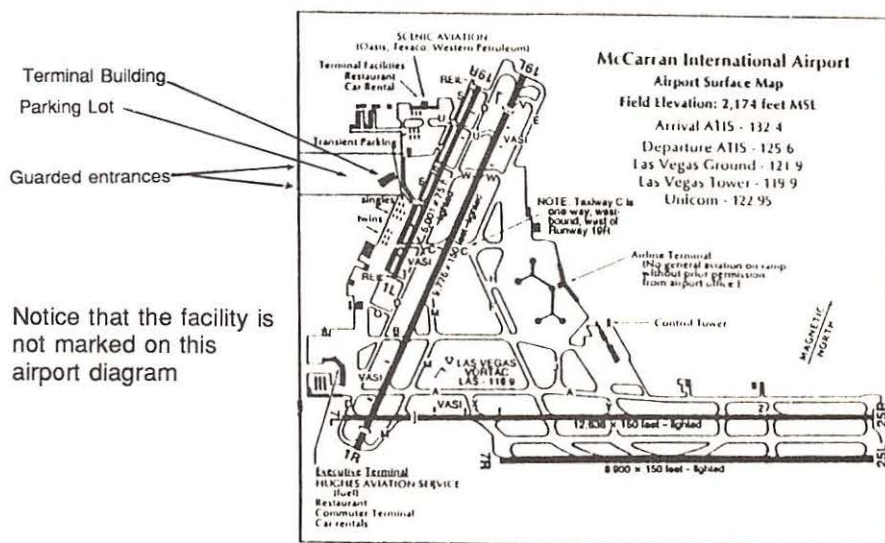

Notice that the facility is not marked on this airport diagram.



HCJB's "DX Partyline" for their anniversary. Ian referred to his temporary location at Radio Japan and Robert wonders what's going on.

Robert, it's our understanding that Ian's contract with Radio Japan is for two years. Leslie Edwards says you can catch him on "Radio Japan News Roundup" at 1100 UTC on Thursdays and Fridays.

Ian McFarland was previously with Radio Canada International. That decimated station, according to a letter from the Minister of Communications to Jack Wrate of Penticton, BC, was voted new funding on March 28, 1991.

Said Minister Perrin Beatty, "The Government is entering into a contract with the CBC to provide service in seven languages: Chinese,

Arabic, Spanish, Russian, Ukrainian, English and French. In addition to the resources for the programming, the Government is also providing money to modernize RCI's transmission facilities to ensure that RCI's voice remains vital and reliable in the years to come."

Somehow that's not the picture painted by all those who lost their jobs. MT is watching our own domestic scene closely as shifting priorities and budget cuts indicate imminent changes in U.S. government-funded broadcasts to the world as well.

Keep watching MT as we bring you more good monitoring times.

- Rachel Baughn,  
Editor

## CONVENTION CALENDAR

Date	Location	Club/Contact Person
Sep 8	Joliet, IL	Bolingbrook ARS/Edwin Weinstein, WD9AYR 7511 Walnut Ave., Woodridge, IL 60517
Sep 8	Butler, PA	Bulter County ARS/Gerald Wetzel, W3DMB 784 Mercer Rd., Butler, PA 16001
Sep 13-15	Melbourne, FL	PCARS, Platinum Coast ARS/Gerry Wentz, KC4EHT (407) 254-3095 Location: Melbourne Auditorium, Hibiscus Blvd. near US #1. Sat 9-5, Sun 9-4. Talk in 146.25/85
Sep 15	Queens, NY	Hall of Science Hamfest/Steve Greenbam, WB2KDG (718) 898-5599 or Arnie Schiffman, WB2YXB (718) 343-0172. Location: New York Hall of Science parking lot-Flushing Meadow Park, 47-01 111th Street. Doors open at 9 am.
Sep 20-22	Watertown, SD	Dakota Division Convention/Darwin Hegg, KZ0E RR3 Box 96, Watertown, SD 57201
Sep 21-22	York, PA	York ARC/Ray Shaub, W3AXC 2331 Locust Rd., Dover, PA 17315
Sep 21-22	Virginia Bch, VA	Virginia Beach Hamfest/Lewis Steingold (804) 486-3800 Location: Virginia Beach Pavilion Conference Center
Sep 21-22	Peoria, IL	Peoria Superfest 91 and Computer Show/Merv Rennich, N9FXS (309) 243-5298 or (309) 675-7390 Location: Exposition Gardens, Northmoor and University Sts., 8 am, \$5 admission good for both days.
Sep 22	Cleveland, OH	Cleveland Hamfest Assn/Glenn Williams, AF8C 513 Kenilworth Rd., Bay Village, OH 44140
Sep 27	Canton, OH	1991 QCWA National Convention/Dennis Moriarty, K8AGB 2445 40th St., NE, Canton, OH 44705, (216) 452-3872
Sep 28-29	Louisville, KY	Kentucky State Convention/Mike Doerhoefer, Wb4AJZ PO Box 34233, Louisville, KY 40233
Sep 29	Yonkers, NY	Metro 70cm Network/Otto Supliski, WB2SLQ 53 Hayward St., Yonkers, NY 10704
Sep 29	Longmont, CO	BARCfest 91/CO Assoc of DXers* Location: Boulder County Fairgrounds, 8am to ?? 1991 Monitoring Times Convention/Contact Judy Grove P.O. Box 98, Brasstown, NC 28902
Oct 4-6	Knoxville, TN	Location: Hyatt Regency; Registration 10/4 3:00 to 6:30pm; \$35 registration fee Huntington ARS/Mike Brooker, WD9JFC 3341 E. 722 N., Huntington, IN 46750
Oct 6	Huntington, IN	Southwestern Division Convention/Alan Sklar, AA7BJ 5967 N. 83rd St., Scottsdale, AZ 85253.
Oct 11-13	Scottsdale, AZ	DX Ontario Assoc-DX Camp #11 80 thru 10 meters - Sunday 7.068 MHz LSB at 12pm or 7.240 MHz at 10am. Reception reports & QSLs to VE3ODX, P.O. Box 161, Station "A", Willowdale, Ontario, M2N 5S8.
Oct 12-14	Toronto	Columbus ARA 1991 Columbus Day Special Event/Roger Dzwonczyk, WB2EIG 283 E. Longview Ave., Columbus, OH 43202.
Oct 12-13	Columbus, OH	Oct 12/0000 UTC - Oct 13/2400 UTC. Suggested operating frequencies: 7.240, 14.340, 21.375, 10M novice phone band.
Oct 20	Golden, CO	Rocky Mountain Radio League/Colorado Assoc of DXers* Location: Jefferson County Fairgrounds, 8am to ??
Oct 26-27	Chattanooga, TN	Chattanooga Amateur Radio Club, Inc./Arthur Parry Jr., WB4 BGX 1100 Hubbard Road, Signal Mountain, TN 37377.

\* Colorado Assoc of DXers, P.O. Box 22202, Denver, CO 80222-0202 for info

Monitoring Times is happy to run brief announcements of radio events open to our readers. Send your announcements at least 60 days before the event to: Monitoring Times Convention Calendar, PO Box 98, Brasstown, NC 28902.

## INDEX OF ADVERTISERS

ACE Communications	5
Advanced Electronic Applications	15
Advanced Electronic Technologies	93
AIE Corporation	23
Antennas West	7, 59, 95
Antique Radio Classified	17
American Radio Relay League	43
Ashton ITC	55
Austin Antenna	97
C. Crane Company	89
Cellular Security Group	5
Communications Electronics	21
CQ Communications	47
Datametrics	35
DX Computing	89
DX Radio Supply	3
801-SCAN	11
Electron Processing	45
Electronic Equipment Bank	19
Elektor Magazine	57
11-Meter Communications	7
Future Scanning Systems	95
Galaxy Electronics	99
Gilfer Shortwave	17
GRE America	47
Grove Enterprises	85, Cover III
Hunterdon Aero Publishers	95
ICOM America	Cover IV
Intercept, Inc.	23
J & J Enterprises	45
Japan Radio Co.	25
Klingenfuss Publications	55
Lakeview	7
MilSpec Communications	39
Monitoring Times	13, 83
Moonbeam Press	17
National Amateur Radio Assn.	37
OptoElectronics	Cover II
Palomar engineering	53
Radio Electronics	73
Satman	45
Scanner World	91
Skyvision	51
Software Systems Consulting	11, 53
Somerset Electronics	9
Spec-Com	95
Tiare Publications	99
TRS Consultants	95
Turbo Electronics	49
Universal Shortwave Radio	81
WI-COMM	95
Wilson Antenna	41
World-Com Technologies	23

When readers are in the  
market, they look here  
to find your ad  
... Will it be here?





# STOCK EXCHANGE

Ads for Stock Exchange must be received 45 days prior to the publication date. All ads must be paid in advance to *Monitoring Times*.

*Monitoring Times assumes no responsibility for misrepresented merchandise.*

**NON-COMMERCIAL SUBSCRIBER RATES:** \$.25 per word - *Subscribers only*. All merchandise must be personal and radio-related.

**COMMERCIAL RATES:** \$1.00 per word. Commercial line ads printed in bold type.

**1-3/4" SQUARE DISPLAY AD:** \$50 per issue. send camera-ready copy or copy to be typeset. Photo-reduction \$5 additional charge. For more information on commercial ads contact Beth Leinbach, 704/389-4007.

## CLASSIFIED RADIO

**BUY/SELL/TRADE**, Advertise **FREE**, pay only if equipment sells, \$15 max! Twice monthly. Easy to read! Subscriptions only \$12/year. Free samples, ad line 1-800-553-9175. P.O. Box 245, Jonesboro, GA 30237.

**MAKE \$\$\$** become an American Electronics Dealer! Profit Opportunities since 1965. Call Dave Wainscott, 1-800-872-1373.

**SONY ICF 2010/2001D FILTER MODS. WIDE FILTER REPLACEMENT WITH INSTRUCTIONS.** KIWA ELECTRONICS (509) 453-KIWA, 612 South 14th Ave., Yakima, WA 98902.

**SURVEILLANCE, COUNTER SURVEILLANCE EQUIPMENT FOR SALE.** WRITE SHERWOOD COMMUNICATIONS, BOX 535-G, SOUTHAMPTON, PA 18966 (215) 357-9065.

**SPACE SHUTTLE SOUVENIR ENVELOPE WITH FREQ. LIST. HF, VHF, UHF. \$3.00 TO: COCOA RADIO PUBS, P.O. BOX 785M, COCOA, FL 32959.**

**T-SHIRT: LET EVERYONE KNOW THAT YOU'RE TUNED TO SHORT-WAVE.** Multi-color design on white t-shirt. Select S-M-L-XL. \$13.00 ppd. Send check or money order to: SCOTT MAZE, P.O. BOX 1175, LITTLE RIVER, SC 29566.

**NORTH CAROLINA: GRUNDIG/PANASONIC SW RADIOS IN STOCK! TED'S TV & AUDIO, GARNER, NC (919) 772-3059.**

**FOR SALE: MIDLAND CB 40-channel** with 4 weather channels. power supply, and Radio Shack mobile antenna \$55.00. **SCANNER BEAM ANTENNA** \$45.00. **GROVE MAGNETIC MOUNT SCANNER ANTENNA** \$35.00. **RADIO SHACK** mobile scanner antenna \$15.00. **MAX 800 ANTENNA** \$12.00. 1 pair **MINI ADVENT SPEAKERS** \$75.00. All in great shape and includes shipping. BOB (708) 526-0973.

**WANTED: PRESIDENT LINCOLN TRANSCEIVER.** Must be in excellent condition, John (716) 693-5290 until 10 pm EST.

**CLANDESTINE COMMUNICATIONS EQUIPMENT WANTED.** Any radio designation RS, RST, RR, SSTC, SST, SSR, PRC-1, PRC-5, PRC-64, Delco 6300, Delco 3200, Delco 1600, GRA-71 Code Burst, M-209 Converter, Walkie-Talkie BC-611 or 721. Any clandestine equipment or literature. Pasquale Lombardi, 1175 Long Hill Rd., Stirling, NJ 07980-1007 (908) 547-8180.

One **SUPER CONVERTER GRE 8001** new \$50; One **SHORTWAVE RECEIVER PANASONIC RF/B600** new \$350. Write to: Marcel, P.O. Box 386, Rescue, CA 95672.

**KING VHF PORTABLE LPH 5141** two batteries, desk charger, speaker, mike, programmable \$475 + shipping; **HOME ALERT MONITOR ELECTRONICS EC-22** 154.430 MHz four-tones \$75; **MOTOROLA MONITOR II UHF** Monitor pager 461.100 MHz, desk charger, \$125; **MOTOROLA MONITOR I VHF** 154.430 MHz, two-tone with charger-amp, \$125. John Miller (907) 248-4456 pacific time.

Receive cellular etc. in the 424-512 MHz band on your scanner with this **UV-800 CONVERTER** \$65. Copy **RTTY, ASCII, AMTOR**, and Morse code with this **KANTRONICS UTU** \$85. Phone (813) 866-3088.

**GRUNDIG SATELLIT 650** mint with boxes, manuals, accessories \$650. Kinnon (904) 249-5890.

**MT BACK ISSUES** from 1983 to December 1990: 81 issues. Also 49 Popular Communications issues, 1984-1990. Best offer. Curt Dunn, (716) 366-8595, 5081 Shorewood Dr., Dunkirk, NY 14048.

**6 VOLT CB RADIO WANTED** in good working condition. Dick Dillman (415) 512-9025.

**FOR SALE OR TRADE: ICOM R71A** \$725; **REALISTIC SCANNERS PRO2021** \$225, **PRO34** \$240, all excellent cond; **PSION ORGANIZER II** Pocket size computer with programs and accessories, LN \$165.

**WANTED: Walkie-Talkies**, battery operated reel to reel tape recorders (Uher, Sony, Nagra, etc), better shorewave radios (Sony 2010, ICOM R7000, etc). We also have a variety of **MILITARY SURPLUS BATTERIES**, many sizes and types, including: alkaline "C" cells (24 pack) only \$9; dry cell 1-1/2 volt 30 A.H. w/binding post-12 for \$18; AA's-10 for \$3. All guaranteed good! Add shipping. S. Traill, 1300 S. 58th St., Philadelphia, PA 19143 (215) 726-1592.

**CHANNEL MASTER 5094A MONITENNA** complete \$35; **HEATH SP-99 SPEAKERS** \$15; 1990 **PASSPORT** \$7; 1991 **PASSPORT** \$10; **PRO-2005 SERVICE MANUAL** \$5. Jim (606) 441-9684.

Sell 65 issues **POPULAR COMMUNICATIONS**; 9/85 **THRU** 2/91, \$100. Call (206) 474-7712.

**ICOM IC-R1** full coverage (100 kHz to 1300 MHz) handheld receiver, new \$500, now \$450. New in box. Call Steve (404) 928-5918.

**SONY CRF-1** vg \$900; **SONY 6800W** vg \$350; **ZENITH TRANSOCEANIC** fair, 1955? \$50; **ICOM R-1** exc. \$350. Available at MT convention '91. Call Hugh Waters (912) 839-3482 or write Rt 2 Box 90, Pembroke, GA 31321.

**FOR SALE: OPTOELECTRONICS UTC** 3000 frequency finder, complete, used once \$300 UPS included. Rudy (708) 358-1150.

**SONY IC-2010** mint condition \$275. Bob (509) 927-9987 or (509) 926-9295.



## HUGE 88 PAGE CATALOG

- Shortwave Receivers
- Amateur Radio Gear
- Scanners
- RTTY & FAX Equipment
- Books & Accessories

Send \$1 to **Universal Radio**  
1280 Alda Drive  
Reynoldsburg, OH 43068

## EAVESDROP ON PC'S!

Intercept signals from PC's and see what's on someone's screen from a half mile away! Easy to assemble from a detailed manual, or purchase the ready to use system.

Manual — \$39.95  
Complete systems from \$995.00  
MO or COD to Spy Supply, Inc.  
7 Colby Court, Bedford, NH 03110  
(603) 645-6244

## WORLD-VU HF MAP

World maps showing predicted HF propagation from your amateur or SWL station to all points of the globe


Maps customized to your station's location, antenna, power and frequencies

For Info send \$1 to:

**WORLD-VU HF MAP**  
P.O. BOX 946  
PORTSMOUTH, RI 02871

**Are You Ready  
for Fall**

# DX SEASON?!

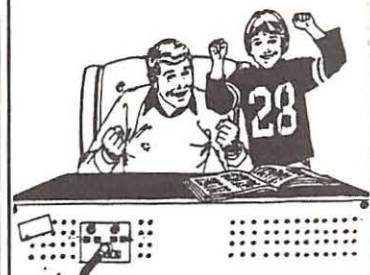

## ICOM IC-R1

Communications Receiver

Handheld portable scanner. Wideband frequency coverage: 100 kHz to 1300 MHz continuous coverage. Signal strength indicator. 100 memories. 10 banks of search frequencies. FM, wideband FM and AM modes. Selectable channel separation: 0.5, 5, 8, 9, 10, 12.5, 15, 20, 25, 30, 50 kHz. Clock and power on/off timers. Built-in NiCd battery. Many other features. Uses same accessories as other ICOM handhelds. Includes AC adapter/charger, antenna, carrying strap, and belt clip. Dimensions 1.9"Wx4"Hx1.4"D. weight 9.9 oz.

New with warranty - \$495  
IC-R100 \$625  
703-222-7554

## YOU AIN'T HEARD NOTHING...YET!

Largest selection of scanner frequency guides (federal, military, police, aero, etc.); AM/FM/TV broadcast directories; Hi-Fi "ute" directories; Books on espionage, covert ops., bugging, wiretapping, surveillance, clandestine radio, & more!  
BIG FREE CATALOG!

CRB RESEARCH  
P.O. Box 54-MT  
Commack NY 11725

## SHORTWAVE LISTENERS

Bring order to the multitude of available broadcasts. Create customized listening schedules on any IBM-compatible PC using:

### PC SHORTWAVE MONITOR™

Printouts by COUNTRY - or by any combination of LANGUAGE, PROGRAM, AND BC DIRECTION codes.

\$19.95 + 2.50 S/H - or DEMO \$3.50

Please specify 5-1/4 or 3-1/2 disk format

S. Gittin  
86-29 155th Avenue #5-N  
Howard Beach, NY 11414  
(718) 738-8943

## CELLULAR TELEPHONE MODIFICATION HANDBOOK

How are hackers making cellular phone calls for free? Techniques for decoding and changing cellular phones, the "roaming technique", chip supplier's phone numbers, etc. Schematics for most cellular phones, and diagrams to find and change phone numbers on all models.

Complete manual \$79.95

MO or COD to Spy Supply, Inc.  
7 Colby Court, Bedford, NH 03110  
(603) 645-6244

*Sold for educational purposes only!*



## SUPER SOUND DETECTOR HEAR THROUGH WALLS!

### ELECTRONIC STETHOSCOPE

Ultra-sensitive device picks up & amplifies sound through solid objects. Hear through glass, wood, plaster, brick or even 12" concrete. Use wherever audible sound is too faint for the unaided human ear. Picks up voices, machinery, running water, even mice or insects. Can be attached directly to a tape recorder. Includes headphones, sensor and battery. \$69.95 check/MO to:

CLE, Box 1913  
Sarasota, FL 34230-1913  
(813) 922-2633.  
Visa/MC accepted.

## SONY Filter Mod

For models ICF-2010 and 2001D

- New wideband filter directly replaces existing filter for improved selectivity.
- New wideband filter dramatically improves 5 kHz heterodyne rejection.
- A must for shortwave listeners
- Easy to install - Complete instructions are included

Kiwa Electronics  
612 South 14th Ave.  
Yakima WA 98902

Tel: 509-453-KIWA

## Radio Frequency Guides on Microfiche

City - State - Federal

Some unavailable elsewhere  
Call or write for  
**FREE SAMPLES**  
and prices.

North Florida Radio  
PO Box 12601  
Tallahassee, FL 32317  
(904) 878-7937

## BUGGED? WIRETAPPED?

Find out fast! Factory direct countermeasures equipment catalog \$1.

### CAPRI ELECTRONICS

P.O. Box 589A  
Bayfield, CO 81122  
(303) 884-9084

## INDOOR ANTENNAS

HF BROADBAND ANTENNAS  
CPL-102A \$29.95 + 4.00 S/H  
CPL-102B \$39.95 + 5.00 S/H  
AUDIO LOW-PASS FILTER  
CPL-103 \$29.95 + 3.50 S/H  
HOUSE WIRING ANTENNA  
CPL-104 \$24.95 + 3.50 S/H  
UNIVERSAL WIRE ANTENNA  
CPL-105 \$11.95 - 2.50 S/H

SEND FOR CATALOG TODAY

CHILTON PACIFIC LTD.  
5632 VAN NUYS BLVD #222  
VAN NUYS, CA 91401

## CANADIANS

Discounted Prices on Uniden Scanners, CB's, Cordless and Cellular Phones and Accessories

Send for FREE listing or request quotation.

### Cellular Communications

83 Galaxy Blvd. #39  
Rexdale, Ont. M9W-5X6

## Your State on Microfiche

All FCC Licensees Statewide  
Do Your Own Frequency Research  
VHF-Low/Hi UHF 800/900 MHz  
Shortwave-Microwave  
Police•Fire•EMS•Aircraft  
Business•IndTV•Utility•Marine

**\$20.00 Postpaid**  
(Except NY-TX-CA = \$30)

To: G. Bellows, P.O. Box 1239  
Charleston, SC 29402

## Radio for Peace International T-Shirts!

Blue, Green,

Yellow design on

White T-Shirt

\$15.00 each ppd.

specify size(s):

M, L, XL

RADIO FOR PEACE INTERNATIONAL

P.O. BOX 10869-C

EUGENE, OREGON 97440

If so, you gotta stay tuned in to get the best tips and articles on your monitoring hobby.

## Moving?

Send us your address change in time to keep your MT coming!

## Subscription Current?

Check your label to see your date of expiration and renew early using the handy order form on page 83!

**Stay tuned to  
Monitoring Times  
and be a Winner!**



## *Listeners' Rights vs. States' Rights*

With the wide publicity surrounding the vulnerability of cordless and mobile telephones to casual and targeted eavesdropping, court cases are mushrooming as uninvited listeners tattle about overheard secrets.

But even before the passage of the Electronic Communications Privacy Act (ECPA '86) which forbids monitoring mobile (but not cordless) phones, several states selectively passed their own laws which forbid scanner listeners from tuning in on law enforcement channels.

The Federal Communications Commission, in a formal Notice of Inquiry (NOI), has been told by the majority of respondents that the Commission should pre-empt such state laws, enforcing its responsibility as established by Congress in 1934 to regulate the airwaves.

Stories abound of scanner listeners traveling into states which outlaw mobile police receivers having their radios confiscated and forfeiting fines.

Some zealous law officers seem more interested in easy apprehensions than in the seriousness of the crime. Active law enforcement is vital to protect our freedoms, but we may question the priorities of the enforcers.



On July 25th, Lawrence Estep, a TV news photographer and emergency team volunteer in New Albany, Indiana, was arrested, handcuffed, and jailed by New Albany police officers who charged him with "Unlawful use (of a) police radio."

He was then subjected to a psychological survey and extensive interrogation before he was released after forfeiting money and his scanner. Estep faces a pretrial hearing on September 27th.

Indiana public law 35-44-5-12 does outlaw police receivers in non-emergency vehicles, but exempts (among others) "a person who is regularly engaged in newsgathering activities." It would seem that Estep, who claims to be regularly employed by two TV stations as a videographer, would qualify.

According to the police report, the officers had been told that someone known to carry a scanner had been reported at several police scenes and a watch for his car had been posted. The report does not indicate that Estep told them he was a news photographer.

It seems to us that justice would be better served in New Albany if their police officers pursued criminals a little more dangerous than scanner listeners.

It has been demonstrated time and again that the overwhelming majority of scanner users are law abiding citizens, often utilizing the information they hear for awareness and safety.

Neighborhood patrols, crime watch teams, REACT chapters and other scanner listeners—often in their cars—commonly provide critical information to public safety agencies of road hazards, accidents, locations of crime scenes and suspects, fires and severe storms about which they hear over police broadcasts.

Regardless of the outcome of the Estep case and others as well, the gray area which confounds recreational radio hobbyists and the courts alike must be resolved. We urge the FCC to pre-empt state laws, exercising their clear mandate to regulate radio at the federal level.

*Bob Grove, WA4PYQ*  
Publisher



# Special Pre-Publication Offer

only \$15.95 SAVE \$4.50  
(Includes shipping in U.S.)

If you order **now**, you will receive in mid-September the 1992 edition of *Passport to World Band Radio*, recognized as the leading guide to shortwave listening -- the "bible" of SWLs worldwide -- at a discount.


Why is *Passport* the leader? Approximately 400 easy-to-read pages provide up-to-date frequencies, schedules and languages of worldwide broadcasters; interviews with and articles by the best known names in shortwave listening; in-depth, authoritative reviews of receiving equipment and accessories.

*Passport* is the ultimate radio roadmap to exotic lands -- who's on what frequencies at what times, while computer-generated graphics make it easy to use. And Larry Magne's highly acclaimed, no-holds-barred, 1992 "Buyers Guide to World Band Radio" is included.

Get the most from your shortwave receiver by using the foremost guide to world band listening. Reserve your copy at a special pre-publication discount -- only \$15.95 (regular price \$16.95 plus \$3.50 shipping) and we will prepay shipping in the U.S.! But **you must order now -- before Sept. 15, 1991.**

Call 1-800-438-8155 for \*VISA, MasterCard or send a check or money order to Grove Enterprises, P.O. Box 98, Brasstown, NC 28902.

## The 1992 Passport to World Band Radio

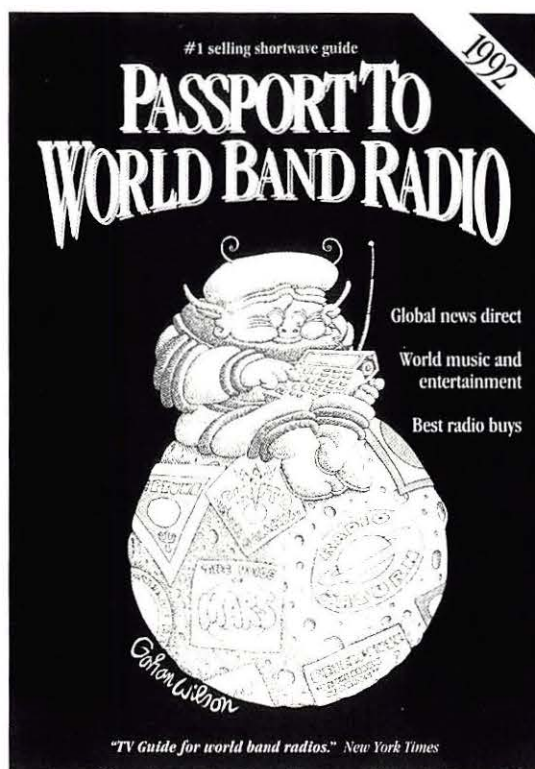

\* Payment will be processed at time of order. For foreign surface mail add \$5.00 (Canada) or \$10.00 (Europe); foreign air mail add \$5.50 (Canada) or \$20.00 (Europe).





# YOU EXPECT THE WORLD FROM ICOM RECEIVERS

ICOM's IC-R71A and IC-R7000 are the professional's choice for receiving international broadcasts, aircraft, marine, business, emergency services, television, and government bands. These people demand the finest in communications and so do you. ICOM puts the world at your fingertips with the IC-R7000 25-2000MHz\* and IC-R71A 0.1-30MHz commercial quality scanning receivers.

## **Incomparable Frequency Control.**

Both the IC-R71A and IC-R7000 feature **direct frequency access** via their front keypad, main tuning dial, optional infrared remote control and/or computer interface adapter. **Incredible Flexibility!**

## **Full Coverage, Maximum Performance.**

The superb IC-R71A is your key to world-wide SSB, CW, RTTY, AM and FM (optional) communications plus foreign broadcasts in the 100kHz to 30MHz range. It features IF Notch, low noise mixer circuits and a 100db dynamic range. The pacesetter **IC-R7000** receives today's hot areas of interest, including aircraft, marine, public services, amateur, and satellite transmissions in the 25MHz

to 2000MHz\* range. It includes **all mode operation** low noise circuits plus outstanding sensitivity and selectivity. The IC-R71A/R7000 combination is your window to the world!



The IC-R71A is a shortwave listener's delight. Its **32 tunable memories** store frequency and mode information, and they are single-button reprogrammable **independent of VFO A or VFO B's operations!** Dual width, an adjustable noise blanker, panel selectable RF preamp, and selectable AGC combined with **four scan modes** and all-mode squelch further enhance the IC-R71A's HF reception!

The IC-R7000 features 99 tunable memories and **six scanning modes**. It even scans a band and loads memories 80 to 99 with active frequencies without

operator assistance! Additional features include selectable scan speed pause delays, wide/narrow FM reception and high frequency stability.

**Options.** IC-R7000: RC-12 remote control, EX-310 voice synthesizer, CK-70 DC adapter, MB-12 mobile bracket. IC-R71A: RC-11 remote control, EX-310 voice synthesizer, CK-70 DC adapter, MB-12 mobile bracket, FL-32A 500Hz, FL-63A 250Hz and FL-44A filters.

**See these quality ICOM receivers at your local authorized ICOM dealer today.**

CORPORATE HEADQUARTERS  
ICOM America, Inc., 2380-116th Ave. N.E., Bellevue, WA 98004  
Customer Service Hotline (206) 454-7619  
CUSTOMER SERVICE CENTERS  
18102 Sky Park South, Ste. 52-B, Irvine, CA 92714 /  
1777 Phoenix Parkway, Suite 201, Atlanta, GA 30349  
ICOM CANADA, A Division of ICOM America, Inc.,  
3071 - #5 Road, Unit 9, Richmond, B.C. V6X 2T4 Canada



All stated specifications are subject to change without notice or obligation. All ICOM radios significantly exceed FCC regulations limiting spurious emissions. RECEIVERS791

# ICOM

First in Communications